



T8

7T8/MAS/24-830/IF10/P 10/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

Product data


General Information		Starting Time (Nom)	
Base	G13 [Medium Bi-Pin Fluorescent]		0.5 s
EU RoHS compliant	Yes	Warm Up Time to 60% Light (Nom)	0.5 s
Nominal Lifetime (Nom)	70000 h	Power Factor (Nom)	0.9
Switching Cycle	50000X	Voltage (Nom)	120-277, 347 V
Light Technical		Temperature	
Color Code	830 [CCT of 3000K]	T-Ambient (Max)	45 °C
Beam Angle (Nom)	180 °	T-Ambient (Min)	-20 °C
Initial lumen (Nom)	1100 lm	T-Storage (Max)	65 °C
Correlated Color Temperature (Nom)	3000 K	T-Storage (Min)	-40 °C
Color Consistency	<6	T-Case Maximum (Nom)	50 °C
Color Rendering Index (Nom)	80	Controls and Dimming	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Dimmable	No
Operating and Electrical		Mechanical and Housing	
Input Frequency	20K to 120K Hz	Product Length	600 mm
Power (Rated) (Nom)	7 W	Approval and Application	
Lamp Current (Max)	240 mA	Energy Saving Product	Yes
Lamp Current (Min)	80 mA		

T8

Approbation Marks	RoHS compliance UL certificate
Energy Certifications	DLC Standard
Product Data	
Order product name	7T8/MAS/24-830/IF10/P 10/1
EAN/UPC - Product	046677541811
Order code	541813

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001986904
Net Weight (Piece)	0.080 kg
Model Number	9290019869


Dimensional drawing

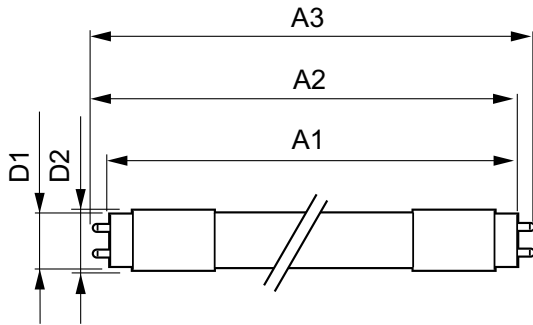


TLED IF MasterClass 2ft 1000lm 3000K

Product	D1	D2	A1	A2	A3
7T8/MAS/24-830/IF10/P 10/1	25.7 mm	26.3 mm	588.6 mm	595.7 mm	602.8 mm


Photometric data



G13 3000K 1100lm





G13 4000K

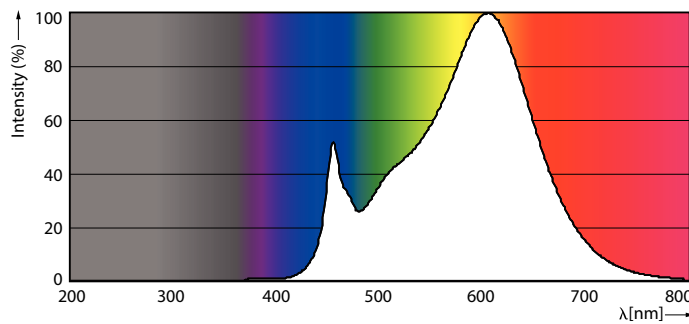



G13 3000K 1100lm

Lifetime

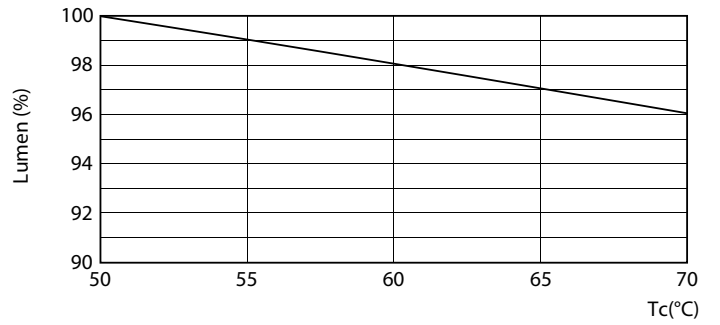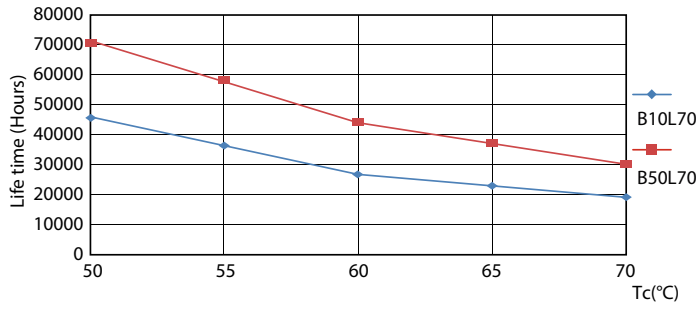


G13 4000K

G13 4000K

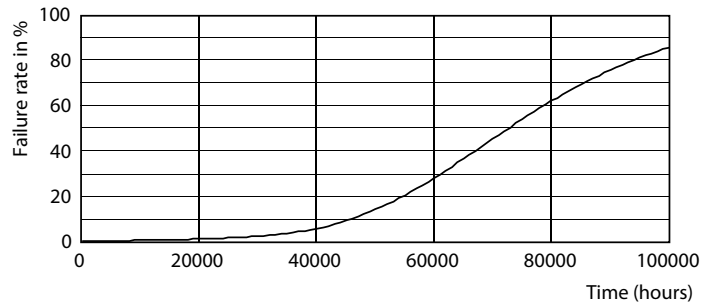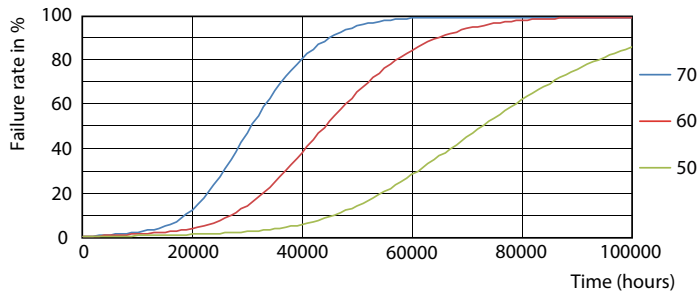

G13 4000K

G13 4000K

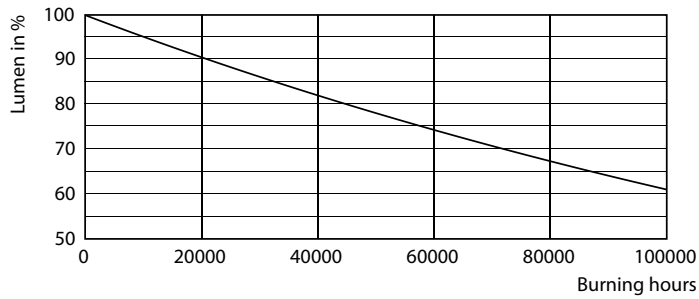

G13 4000K

