

PHILIPS

Lighting



T8

9.5T8/MAS/48-840/IF16/P/DIM 10/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Nominal lifetime	70,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	180 degree(s)
Luminous Flux	1,600 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	168.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	
Power Consumption	50 to 60 Hz
Starting Time (Nom)	9.5 W
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5 s
Voltage (Nom)	0.9
UL Type	120-277, 347 V
UL Type	
Temperature	
Ambient temperature range	-20 °C to 55 °C
T-Case Maximum (Nom)	55 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	1,200 mm

Bulb Shape	T8
------------	----

Approval and Application


Energy Saving Product	Yes
Approval Marks	RoHS compliance UL certificate DLC compliance
Energy Consumption kWh/1000 h	- kWh

Product Data

Order product name	9.5T8/MAS/48-840/IF16/P/DIM 10/1
--------------------	----------------------------------


Full product name	9.5T8/MAS/48-840/IF16/P/DIM 10/1
Order code	473990
Material Nr. (12NC)	929002016004
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677473990
Numerator - Packs per outer box	10
EAN/UPC - Case	50046677473995

Dimensional drawing

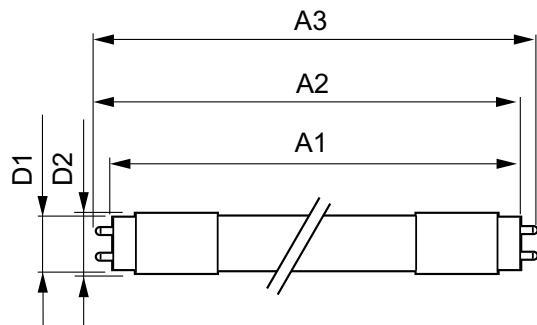


Product	D1	D2	A1	A2	A3
9.5T8/MAS/48-840/IF16/P/DIM 10/1	25.7 mm	28 mm	1,198.1 mm	1,205.2 mm	1,212.3 mm

Photometric data




Spectral Power Distribution Colour - 9.5T8/MAS/48-840/IF16/P/DIM 10/1




General uniform lighting - 9.5T8/MAS/48-840/IF16/P/DIM 10/1

Photometric data




Light Distribution Diagram - 9.5T8/MAS/48-840/IF16/P/DIM 10/1


Lifetime

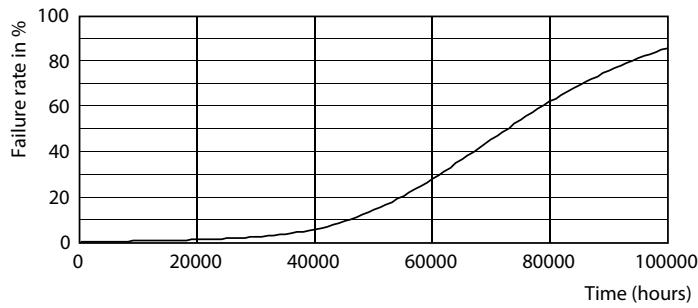


Life Expectancy Diagram - 9.5T8/MAS/48-840/IF16/P/DIM 10/1

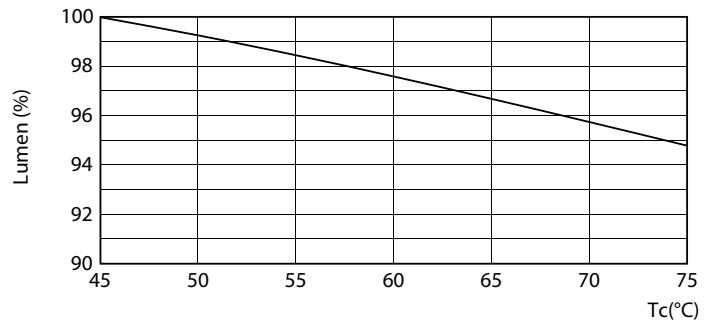


Lumen Maintenance Diagram - 9.5T8/MAS/48-840/IF16/P/DIM 10/1

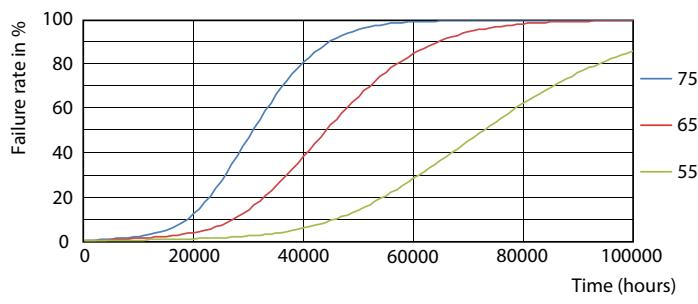

Life Expectancy Diagram - 9.5T8/MAS/48-840/IF16/P/DIM 10/1

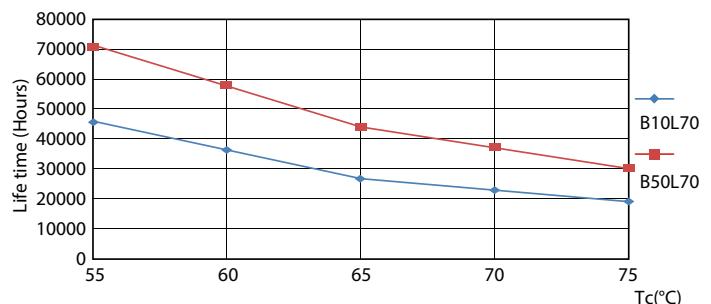

Life Expectancy Diagram - 9.5T8/MAS/48-840/IF16/P/DIM 10/1

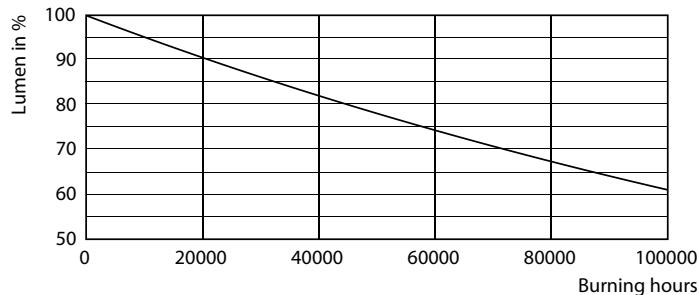Lifetime

Lumen Maintenance Diagram - 9.5T8/MAS/48-840/IF16/P/DIM 10/1

