Downlighting

LIGHTOLIER

Calculite LED 4" gen 3







C4RDL Round Downlight

Calculite LED 4" generation 3 provides excellent performance coupled with optimized installation flexibility. Industry leading visual comfort and uniform illumination make it an ideal choice for open office, institution, healthcare, and retail applications.

Buy American Act of 1933 (BAA) Compliant luminaire*: Complete luminaire = Frame-BAC + Engine-BAC + Trim-BAC

* BAA compliance requires that BAC option be selected for each of frame, engine, and trim. Frame, engine, and trim will be shipped together as a single product. Accessories (optional) are not currently BAA-compliant.

Project:
Location:
Cat.No:
Туре:
Qty:
Natas

Follow the ordering guidelines below. Each step is a separate order line.

Step 1	Frame: Ordered & shipped separately.		
	Frame 4R		Example: 4RN
Step 2	Engine & Trim: Ordered & shipped as a single product.		
	Engine C4L	-C4R	Example: C4L15935MZ10U-C4RDLCC
Step 3 (optional)	Accessories: Ordered & shipped separately.		

Frame	Standard example: 4RN	BAC example: 4RN-BAC

Ser 4F	_	In	stallation	Volta	ge/Options		
4R	4" Non-IC Round	N	New construction	— ЕМ6	Universal 120/277/347V Emergency, 6W Self-Test/Self-Diagnostic ¹	LC BAC	Chicago Plenum ² Meets the requirements of the Buy American Act of 1933 (BAA) ⁹
		R	Remodeler	-	Universal 120/277/347V	BAC	Meets the requirements of the Buy American Act of 1933 (BAA) ⁹
En	gine				Standard example	: C4L2	0930MZ10D20UF BAC example : C4L20930MZ10D20U-BAC

Linginio	California de Ca						
Series C4L	Lumens	CRI/CCT	Beam	Dimming	Options	Voltage	Options
C4L Calculite LED 4"	05 500 lm 10 1000 lm	927 90CRI/2700K 930 90CRI/3000K	N Narrow (43°) ⁴ M Medium (56°) ⁴	Z10 0-10 V 1%	None D2O Dim to Off	U 120/277V 3 347V (Z10 only)	F Flex install ⁶ (no frame required)
gen 3	15 1500 lm 20 2000 lm 25 2500 lm 30 3000 lm*	2500lm 950 90CRI/5000K ³	W Wide (76°)	L01 Lutron PEQ0 EcoSystem 0.1 L1 Lutron LDE1 EcoSystem (500 RA Integral Interact RF sensor	Ilm not available)	U 120/277V nected lighting control)	R Calculite legacy retrofit ⁷ RH Retrofit for
	* See marked	to 1800K ⁴ (dim-to-warm)		D DALI 0.1%	None LIN Linear	U 120/277V	tall collar frame ⁷ BAC Meets the
spacings requirements on page 9.		SOL EldoLED Solo 0-10V 0.1% DMX Digital Multiplexing w/RDM 0.1%	None LIN Linear SQR Square	U 120/277V	requirements of the Buy American Act of 1933 (BAA) ⁹		
				E Forward & Reverse Phase (u	p to 2500lm)	1 120V	

Trim	Standard example: C4RDLCCP BAC example: C4RDLCCP-BAC

Series C4	Aperture R	Style	Finish (White not available with polished flange)		Flange	Options	
C4 Calculite LED 4" gen 3	R Round	DL Downlight			- White (matte) P Polished (matches aperture) F Flangeless (requires CA4RFT)	IEM6 Trim mounted EM test switch BAC Meets requisites	
			WHAMF White (gloss antimicrobial)		- White (matches finish)	of the Buy American Act of 1933 (BAA) ⁹	
		SL Shower light ⁸	WH White (matte) WHAMF White (gloss antimicrobial) -		- White (matches finish)	ACT OF 1933 (BAA)	

See footnotes on page 2.











Round Downlight

Accessories (Not currently BAA-compliant) learn more below

SWCS Interact Ready System Bridge Accessory (refer to SWCS spec sheet for options and details)

4" round/square non-IC frame with Flex (F) light engine

(provides mechanical support for rough-in construction only, no junction box)

LCEM6 Field installable Bodine BSL06 emergency battery pack (for Flex (F) light engine only, includes switch mounting plate)

T347-75VA 347:120V step-down transformer for non-IC (N) frame only (see page 3)

7920 Sloped ceiling 4" adapter for 4RN and 4RA frames,

specify with flanged trims only.

(refer to SCA spec sheet for slope options)

CA4RFT Mud-in ring for 4" round flangeless trim installs (ordered with flangeless trim)

CAEM6 Field-installable Bodine BSL6 6W battery pack with self-test/
self-diagnostic (for new construction frames, 120-277V) (see page 3 for details)

C4RVPWH IP65 Rated vandal proof matte white accessory mounts onto flangeless trims (C4RDL□F) and new construction frame only

CAEM6TSCP Emergency test switch mounting plate.

Must be ordered with EM6 frame for remote test switch (see page 3)

Round Downlight

Photometric - Downlights with CRI of 90+ & R9 of 50+

Lumen		Flux	Efficacy	Beam				IES	TM-30	D-18	
Package	Beam	(lm)	(lm/W)	Angle	СВСР	CRI	R9	R _f	Rg	R _{cs,h1}	UGR
500 lm	Narrow (N)	609	101	39°	1409	90+	50+	91	100	-6%	0
	Medium (M)	625	102	53°	769	90+	50+	91	99	-6%	0
	Wide (W)	570	93	69°	378	90+	50+	91	99	-6%	0
1000 lm	Narrow (N)	905	104	39°	2094	90+	50+	91	100	-6%	0
	Medium (M)	1056	105	53°	1300	90+	50+	91	99	-6%	0
	Wide (W)	963	95	69°	638	90+	50+	91	99	-6%	0
1500 lm	Narrow (N)	1347	101	39°	3118	90+	50+	91	100	-6%	1
	Medium (M)	1510	108	53°	1859	90+	50+	91	99	-6%	2
	Wide (W)	1385	99	69°	917	90+	50+	91	99	-6%	1
2000 lm	Narrow (N)	1778	101	39°	4115	90+	50+	91	100	-6%	2
	Medium (M)	1937	105	53°	2385	90+	50+	91	99	-6%	2
	Wide (W)	1779	97	69°	1178	90+	50+	91	99	-6%	2
2500 lm	Narrow (N)	2107	98	39°	4875	90+	50+	91	100	-6%	3
	Medium (M)	2431	103	53°	2992	90+	50+	91	99	-6%	3
	Wide (W)	2233	95	69°	1479	90+	50+	91	99	-6%	3
3000 lm	Narrow (N)	2587	93	39°	5987	90+	50+	91	100	-6%	3
	Medium (M)	2991	101	53°	3682	90+	50+	91	99	-6%	4
	Wide (W)	2702	91	69°	1790	90+	50+	91	99	-6%	4



AccuRender Technology (CRI 90+)

The right light brings colors to life. Our new AccuRender technology helps ensure colors are rendered more accurately and consistently, while doing so as efficiently as CRI 80 products.



Standard CRI 80

Good color rendering and high efficacy



Standard CRI 90

Better color rendering and low efficacy



AccuRender

Best color rendering, color preference and high efficacy

Enjoy design flexibility

Full range of products and options:

- Available soon in across Lightolier portfolio for application flexibility
- Multiple color temperatures (CCTs) and lumen packages offered

Promote savings

High efficacy, with no penalty:

- Energy efficacy compares well to conventional 80 CRI
- Up to 25% more energy savings vs competitor 90 CRI¹
- · Helps meet Title 24 requirements

Show your true colors

High color rendering:

- True to life colors that help energize your environment and render better flesh tones critical for healthcare hospitality and retail applications.
- R_a up to 94 CRI R_f up to 92 TM-30 R₉ up to 67 CRI R_{th1} up to 91 TM-30 G_a up to 99 CRI R₉ up to 100 TM-30 C₉ up to 94 CRI R_{cs,h1} up to -5% TM-30

Achieve color balance

Best in class color consistency:

 Promote aesthetic harmony in your space with ≤ 2 SDCM

Footnotes for page 1

- Emergency (EM6) frame is compatible with reflector mounted test switch when trim is ordered
 with IEM6 option code (not compatible with 347V or Power over Ethernet configurations).
 For remote mount switch, order standard trim and CAEM6TSCP mounting plate accessory.
- 2. Chicago plenum (LC) frame option not available with BAC nor EM6 options.
- 3. Consult factory for 5000K CCT (50) with narrow (N) beam.
- Dim-to-warm (D2W) available only with Z10 dimming up to 2000lm with Narrow (N) and Medium (M) beam engines only.
- 5. Linear driver profile (see page 8).
- Flex install option requires light engine (F)/trim only (up to 2500lm).
 For use only with optional 4RNSR new construction frame accessory.
 Not available with Interact (RA) dimming and IEM6 trim options. See page 3 for further details.
- 7. Retrofits select legacy luminaires (E & Z10 dimming only see pages 3 & 8).
- Non-conductive flush mount lens with pre-installed gasket (matte white non-conductive flange with diffuse lens that is flush with the flange).
- 9. Failure to properly select the "BAC" suffix could result in you receiving product that is not BAA compliant product with no recourse for an RMA or refund. This BAC designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds administered by the Department of Transportation or other federal agencies.

Round Downlight

Frame-in-kits

New Construction:

Galvanized stamped steel for dry or plaster ceilings. Pre-installed telescoping mounting bars from 13" to 24". For 4' distances, use 1/2" EMT, 1-1/2" x 1/2" U or C channel.

Max ceiling thickness is 2" (51 mm) plenum depth for installation.

Patented install Mounting frame:

- Pre-installed mounting bars for fast and tool-less installs into T-grid & hat channel ceilings.
- Close-cut aperture design eliminates possibility of gap between ceiling opening and reflector flange.
- Separate wiring compartment for wiring frame to building allows inspection prior to light engine install.
- Simple plug-and-play connection between frame and light engine from below ceiling.

Retrofit

 Easily updates legacy Calculite downlights to the latest LED technology. Includes light engine, trim, and driver mounted on cover plate that mounts to junction box of previous Calculite generations. Order with R or RH option code at end of light engine catalog number (see details on page 6).

Compatibility:

Frames	Engines
With CFL S4118_series	Use Retrofit configuration C4R_ Trim + C4L_ Engine
With INC AS400_series	Use Retrofit configuration C4R_ Trim + C4L_ Engine
With LED C4L_N series C4X4L_N series	Use Retrofit configuration C4R_ Trim + C4L_ Engine C4S_ Trim + C4L_ Engine
- · · · · · · · · · · · · · · · · · · ·	

* Not available for retrofitting luminaires with integral emergency battery.

Emergency

Bodine BSL6 6W battery pack with self-test/ diagnostic functionality. Factory or field mounted to frame.

- For trim with integral emergency test switch, order trim with IEM6 option (ex: C4RDLCCIEM6).
- For remote ceiling mounted test switch, order standard trim (ex: C4RDLCC). Optional accessory ceiling mounting plate available (CAEM6TSCP) for remote mounted test switch.
- Refer to Calculite-LyteProfile-EasyLyte Emergency Battery Pack specification sheet for more details.

Dimming

All configurations are FCC Class A unless otherwise specified.

- Advance 0-10V 1% (Z10), logarithmic curve is standard. Specify D2O for factory-set dimto-off function, consult factory for linear dimming curve.
- EldoLED SOLODrive (SOL) 0-10v 0.1%
- Lutron PEQ0 (L) Hi-Lume Premier 0.1% EcoSystem
- · Lutron LDE1 (LO1) EcoSystem 1%
- · Lutron LTE (LTE) Hi-Lume 2-wire phase cut 1%
- Electronic low voltage (E) forward or reverse phase dimming, Remodel and AirSeal IC Shallow are FCC Class B
- DALI (D) DT6 DALI 0.1%
- DMX (DMX) Digital Multiplexing with RDM 0.1%

Dimming Options: The following are factory-set options for the SOL, D, and DMX driver options (ex. DMXLIN):

- · SOL/D/DMX: Logarithmic (-) standard
- · SOL/D/DMX: Linear (LIN)
- SOL/DMX: Square (SQR)
- Dim to Warm (D2W): option changes CCT from 3000-1800K gradually as it dims. Use with Z10 dimming only. Fixture-to-fixture consistency of ≤3SDCM at 2700K & 3000K, and ≤5SDCM at 1800K.

Optical systems

Comfort throughout the space:

True 50° physical cutoff and 45° reflected cutoff.

Quality of light:

2 SDCM ensures color consistency from fixture to fixture and over the luminaire's long lifetime.

MesoOptics PET optical diffusion film:

Provides a smooth beam shape and mitigates color over angle with optimized luminaire efficiency. Mitigates LED pixilation.

Light engine

Quick connect power pack allow for easy installation and replacement from below ceiling with no need for additional wiring. This allows for:

- Frame and ceiling installation to be performed while still finalizing details such as lumen packages, CCT and control type.
- Easy replacement of electronics at end of life with minimal wasted material and labor required.
- · Ease and upgradability of technology.
- 347V light engines are Z10 dimming only and include dedicated 347V driver. For 347V non-Z10 dimming, order T347-75VA field-installed stepdown transformer accessory.

Flex engine (F)

- Frame-optional engine suited for new construction, remodel, and retrofit applications.
- 4RNSR new construction frame accessory available as required to support ceiling construction.
- All wiring is done on the integral j-box to the engine.

Options and Accessories

Flangeless mud-in ring: Use CA4RFT For use with flangless plaster installations.

Sloped ceilings: Compatible with sloped ceiling adapters (see **SCA** spec sheet).

C4RVPWH: Includes machined aluminum ring painted white, gasketed for IP65 protection, and impact resistant polycarbonate lens (IK10). Locks in place with discrete setscrew (key included). Available also with antimicrobial finish (C4RVPWHAMF).

CAEM6TSCP: Ceiling cover plate for remote mounted EM6 test switch. 1/2" (25mm) hole, $4\,3/8$ " (109mm) x 2 3/4" (69mm) rectangular. Includes two mounting screws.

Field install EM6 kit with Bodine BSL6 6W battery pack with self-test/self-diagnostic: Includes remote ceiling plate for test switch. To mount test switch to trim for new construction frame, order trim with IEM6 option code (e.g. C4RDLCCIEM6). Refer to Calculite-LyteProfile-EasyLyte Emergency Battery Pack specification sheet for more details.

CAEM6: For use with UniFrame frame in kits.

LCEM6: For use with Flex intall (F) light engines.

SWCS: Interact Ready System Bridge Accessory Requires IRT9015 IR remote and Interact Pro App for commissioning.

T347-75VA: Field installable 347:120V 75VA step-down transformer, attaches to knock out on frame junction box, for use with non-IC (N) frames. Not for use with emergency options.

Title 24 exceptions

- 1000lm configurations
- Champagne Bronze & Black finishes

Labels and Listings

- cULus listed for wet locations
- RoHS certified
- CEC Title 24 JA8 certified
- CCEA (frames with *LC suffix)
- IP65 rated with vandal proof accessory
- Red List Declare label certified, ID SIG-0021 (View full Declare label)

Warranty



5 year limited warranty

Visit Signify.com/warranties for more information on Signify's standard 5-year limited warranty on complete luminaire systems.

Round Downlight

interact


interact				and N
			Gatew	ay Connected
		Standalone	Option 1	Option 2
Dimming, grouping, and zoning		<u> </u>	✓	✓
Bluetooth and ZigBee enabled		~	✓	~
Motion sensing and daylight harvesting		~	✓	~
Integration with 0-10V and phase dimming fixtures		~	✓	~
Code compliance		~	✓	/
Granular dimming and dwell time		~	✓	/
Correlated color temperature (CCT) tuning by switch	New	~	✓	/
Support for sensor-based Tunable White luminaires	New	~	✓	/
Energy reporting and monitoring			✓	/
Scheduling			✓	/
Demand response			✓	/
BMS integration (BACnet)				~
Floor plan visualization				~
IoT sensors for wellness				~
IoT Apps for productivity				~

Currently supported maximum system size

To be able to design the lighting system correctly for the customer, it is important to know the prime characteristics of the system, its possibilities and limitations.

System level	
Total number of gateways	Unlimited
Total number of devices	200 per network
Luminaires with integrated sensors	150
Smart TLEDS	150
· Zones + groups	64
Total number of ZGP devices (sensors and switches)	50
Sensors	30
• Switches	50

Group level							
Recommended number of lights	40 (maximum 150)						
Number of ZGP devices	5						
Number of scenes	16						

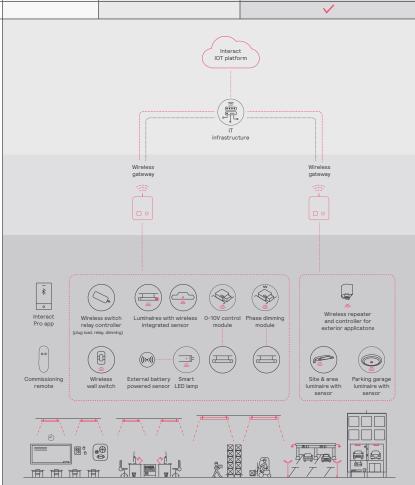

dillatin

Round Downlight

Wireless controls options

Interact

- SWZCS is a connected sensor with integral occupancy and daylight sensing and supports wireless mesh connectivity.
- The sensor works in the standalone mode (similar to SpaceWise) when configured without a gateway or in a cloud connected mode if a compatible gateway is used.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & BlueTooth connectivity.
 The App provides flexibility to choose between a gateway or non gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely and use IRT9015 remote on-site to identify and group devices together.

Compatible with:

- SWS200 & UID8465 wireless scene switch
- Battery powered IP42 presence sensor OCC sensor IA CM WH 10/1
- Battery powered IP42 presence & daylight sensor OCC-DL sensor IA CM IP42 WH
- LCN3110: battery powered IP65 presence sensor, OCC sensor IA CM IP65W
- LCN3120: battery powered IP65 presence & daylight sensor, OCC-DL sensor IA CM IP65 WH
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

Radio only sensor (RA or RADIO)

- Integral RA or RADIO only sensor simply enables wireless mesh connectivity to the luminaire without any occupancy or daylight sensing.
- Ideal for applications where sensing functionality is managed by other Interact devices and the luminaire only needs to have wireless connectivity.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & Bluetooth connectivity.
 The App provides flexibility to choose between a gateway or non-gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely, identify and group devices together onsite.
- Compatible with SWS200 and UID8465 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1).
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

Sensor bundle (IAOSB or SB)

- A wireless IoT connected lighting solution for large enterprises that span across multiple floors, buildings and require multiple gateways.
- View all your projects under one dashboard and easily compare insights from multiple projects in one view.
- Compatible with SWS200 wireless scene switch, wireless Occ sensor (OCC SENSORIA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1) and wireless Occupancy or Daylight & Occupancy sensors available. Use Interact software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- IAOSB or SB option in addition to occupancy and daylights sensing supports advanced IoT capabilities, such as people estimation analysis, desk level temperature & humidity sensing, noise classification, and BLE beacon.
- Requires compatible Gateway and internet connectivity for commissioning.
- For more information, visit: interact-lighting.com/interactproscalablesystem

Emergency Options (ER100)

- Power Sensing (factory default) –
 Recommended UL924 option requires unswitched
 power sense line, absence of voltage on the
 normal circuit triggers luminaire to 100% output.
- Power Interruption Detection (field option) –
 Detects AC power interruption >30ms triggers
 90 minute emergency mode with luminaire at
 100% output.

Interact supported sensor option codes across Genlyte product lines

	Evokit	Day-Brite	Ledalite	Lightolier
ZigBee + Bluetooth + Sensing	SWZCS	SWZCS	CS	SBA accessory (external)
ZigBee + Bluetooth	RADIO	RADIO	RA	RA
ZigBee + Bluetooth + Sensing + Environmental data	IAOSB	IAOSB	SB	SB
ZigBee + Highbay + Sensing	-	SWZCSH	-	-

Round Downlight

Polished Reflectors



Specular clear (CL): Most specular and most efficient finish, delivers maximum photometric performance but can produce a mirror image effect of the interior space.



Comfort clear (CC): Semi-specular finish that softens the light at the source of the reflector and creates a subtle, even luminance from the reflector cone.



Comfort clear diffuse (CD): Slightly diffuse clear finish, that eliminates iridescence and reduces the mirror image effect inherent with specular finishes.



Vandal proof (VP): Provides an elegant solution for vandal resistant needs. One piece machined aluminum ring with impact resistant clear lens. Flangeless (F) flange must be ordered. Provides the luminaire with an IK10 impact and IP65 rating



Champagne bronze (CZ): Semi-specular finish that softens light at the source of the reflector while providing a warmer reflector appearance (slightly warmer).



White (WH): (matte) Brightest illuminated aperture and provides the smoothest transition to most ceilings when off (white is only available with a white flange).



Black (BK): (anodized) Specular finish that provides the lowest aperture brightness possible and significantly reduces source identification in a ceiling.



Shower light (SL): Wet location rated shower light with clear acrylic lens applicable in any installation requiring dead front trims, interior or exterior non-corrosive applications, or where a diffused lens at the ceiling is required (non-conductive).

Flanges



White (-): (matte) Provides the smoothest transition to ceilings when off.



Polished (P): (matches aperture) Produces a continuous look throughout the reflector (aperture matching).




Flangeless (F): (flush-mount)Creates a flush, virtually seamless transition from aperture to ceiling.




Mud-in ring (FT): Low profile, machined aluminum mud-in ring provides a raised rib to plaster up to and a 3/16" flange thickness. The ring is attached to the ceiling material as opposed to the frame-in kit to avoid conduction of heat and vibration which can cause yellowing or cracking of the plaster.


Round Downlight


New Construction (N)






Chicago Plenum (LC)







Remodeler (R)



Flangeless mud-in ring (CA4RFT) accessory




Vandal Proof (VP) accessory





Round Downlight

Round tall collar frame (RH type light engine required)

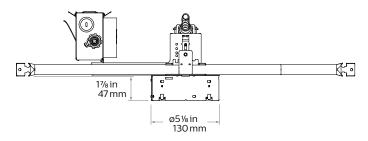



Round standard steel frame (R type light engine required)



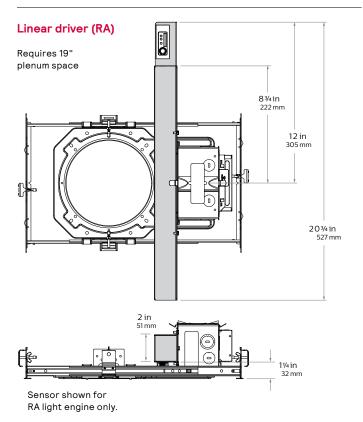



Flex Install (F)






LCEM6 Flex install (F) engine only





4RNSR Flex install non-IC frame



Α	В	С	D	E	F
10 ¾"	7¼"	13 %"	1"	4%"	5¼"
276mm	184mm	345mm	25mm	124mm	132mm

Round Downlight

Electrical - Narrow

Light	Input	Input	Input	Drive	Input	LED	THD Factor	Power Factor
engine	Volts	Freq.		Current		Power	@ Max	Load
	120V	50/60Hz	0.050A	0.15A	6.0W	4.8W	<10%	>0.9
500lm	277V	50/60Hz	0.023A	0.15A	6.3W	4.8W	<30%	>0.9
	347V	50/60Hz	0.020A	0.15A	7.0W	4.8W	N/A	>0.9
	120V	50/60Hz	0.072A	0.22A	8.7W	7.1W	<10%	>0.9
1000lm	277V	50/60Hz	0.032A	0.22A	8.9W	7.1W	<20%	>0.9
	347V	50/60Hz	0.029A	0.22A	10.1W	7.1W	<30%	>0.9
	120V	50/60Hz	0.108A	0.33A	12.9W	10.8W	<10%	>0.9
1500lm	277V	50/60Hz	0.047A	0.33A	13.0W	10.8W	<10%	>0.9
	347V	50/60Hz	0.043A	0.33A	14.8W	10.8W	<25%	>0.9
	120V	50/60Hz	0.147A	0.45A	17.6W	14.9W	<10%	>0.9
2000lm	277V	50/60Hz	0.064A	0.45A	17.7W	14.9W	<10%	>0.9
	347V	50/60Hz	0.056A	0.45A	19.6W	14.9W	<20%	>0.9
	120V	50/60Hz	0.180A	0.55A	21.6W	18.3W	<10%	>0.9
2500lm	277V	50/60Hz	0.078A	0.55A	21.7W	18.3W	<10%	>0.9
	347V	50/60Hz	0.066A	0.55A	22.9W	18.3W	<20%	>0.9
	120V	50/60Hz	0.231A	0.70A	27.7W	23.7W	<10%	>0.9
3000lm	277V	50/60Hz	0.100A	0.70A	27.6W	23.7W	<10%	>0.9
	347V	50/60Hz	0.083A	0.70A	28.9W	23.7W	<15%	>0.9


Lifetime (TM-21) data

Lumens Narrow beam		Medium/Wide beam		
500lm 1000lm 1500lm	L85 @ 55,000hrs.	L90 @ 60,000hrs.		
2000lm	L85 @ 55,000hrs.	L80 @ 60,000hrs.		

Electrical - Medium & Wide Downlights

Light	Input	Input	Input	Drive	Input	LED	THD Factor	Power Factor
engine	Volts	Freq.	Current	Current		Power	@ Max	Load
	120V	50/60Hz	0.051A	0.15A	6.1W	4.8W	<10%	>0.9
500lm	277V	50/60Hz	0.023A	0.15A	6.4W	4.8W	<30%	>0.9
	347V	50/60Hz	0.020A	0.15A	7.1W	4.8W	N/A	>0.9
	120V	50/60Hz	0.084A	0.25A	10.1W	8.3W	<10%	>0.9
1000lm	277V	50/60Hz	0.037A	0.25A	10.3W	8.3W	<10%	>0.9
	347V	50/60Hz	0.034A	0.25A	11.7W	8.3W	<30%	>0.9
	120V	50/60Hz	0.117A	0.36A	14.0W	11.8W	<10%	>0.9
1500lm	277V	50/60Hz	0.051A	0.36A	14.1W	11.8W	<10%	>0.9
	347V	50/60Hz	0.046A	0.36A	16.0W	11.8W	<25%	>0.9
·	120V	50/60Hz	0.153A	0.47A	18.4W	15.5W	<10%	>0.9
2000lm	277V	50/60Hz	0.067A	0.47A	18.5W	15.5W	<10%	>0.9
	347V	50/60Hz	0.059A	0.47A	20.3W	15.5W	<20%	>0.9
	120V	50/60Hz	0.197A	0.60A	23.6W	20.1W	<10%	>0.9
2500lm	277V	50/60Hz	0.085A	0.60A	23.6W	20.1W	<10%	>0.9
	347V	50/60Hz	0.072A	0.60A	24.9W	20.1W	<20%	>0.9
•	120V	50/60Hz	0.247A	0.75A	29.7W	25.5W	<10%	>0.9
3000lm	277V	50/60Hz	0.107A	0.75A	29.7W	25.5W	<10%	>0.9
	347V	50/60Hz	0.087A	0.75A	30.4W	25.5W	<15%	>0.9

Dim-to-Warm: CCT vs Dimmed level



Lifetime (TM-21 data)

Lumens	Narrow beam	Medium/Wide beam*
500lm 1000lm 1500lm	L90 @ 60,000hrs.	L90 @ 60,000hrs.
2000lm 2500lm 3000lm*	L90 @ 60,000hrs.	L85 @ 60,000hrs.

^{*} Lutron 3000lm with Medium/Wide beam is L80 @ 60,000hrs.

Marked spacing applications

Light engine	3000lm
C4L_Z10 series	Х
C4L_L01 series	Х
C4L_L1 series	Х
C4L_LD series	Х
C4L_LTE series	Х
C4L_D series	Х
C4L_DMX series	Х
C4L_RA series	Х

Modules marked with an X require marked spacing:


- Center-to-center of adjacent luminaires: 24" (610mm)
- Luminaire center to side building member: 12" (305mm)

In accordance with CAN ICES-005-A/ NEB-005-A and FCC Part 15-A.

Round Downlight

Narrow beam, 1500lm Engine, 117lm/W at 13W

Candela Curve



4RN / C4L15935N / C4RDLCL

Output lumens:	1492 lms
Input watts:	12.8 W
CRI:	90 min
CCT1:	3500K
Spacing Crit.:	0.62
Beam Angle:	36°

Zonal summary

Zone	Lumens	%Luminaire
0-30	1322	88.6%
0-40	1437	96.3%
0-60	1490	99.9%
0-90	1492	100.0%

Angle	Mean CP	Lumens
0	3676	
5	3512	
10	3039	320
15	2364	
20	1536	639
25	769	
30	312	363
35	171	
40	135	115
45	64	
50	8	51
55	2	
60	1	2
65	1	
70	0	1
75	0	
80	0 0 0	0
85	0	
90	0	0

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	102	4.8'
6'	80	5.4'
7'	65	6.0'
8'	45	6.6'
9'	19	8.7'

^{*} Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	63.0	0.57
6'	42.0	0.37
7'	30.0	0.27
8'	25.0	0.22
9'	20.0	0.18
101 201 21011	Room Workplane 2 5'	

above floor, 80/50/20% Reflectances

Efficacy: 116.6 lm/W Report²: STMR-2974

Adjustment factors


Finish	CCT	Lumens
CL = 100% CC = 95% CD = 87% CZ = 63% WH = 87% BK = 57%	90CRI, 4000K = 102% 90CRI, 3500K = 100% 90CRI, 3000K = 96% 90CRI, 2700K = 92%	3000lm = 200% 2500lm = 167% 2000lm = 133% 1500lm = 100% 1000lm = 67% 500lm = 33%

Coefficients of utilization

Cei	ling		80)%		70	1%	50)%	30)%	0%
Wal	I	70	50	30	10	50	10	50	10	50	10	0
RCI	₹	Zona	al cav	ity me	ethod	- Eff	ectiv	e floo	r refl	ectar	nce =	20%
	0	119	119	119	119	116	116	111	111	106	106	100
0	1	114	112	110	108	110	106	106	103	102	100	95
Room Cavity Ratio	2	110	106	103	100	104	99	101	96	98	94	91
20	3	106	100	96	93	99	92	97	91	94	89	87
ΞĒ	4	102	96	91	88	94	87	92	86	91	85	83
á	5	98	91	86	83	90	82	89	82	87	81	79
Ö	6	94	87	82	79	86	78	85	78	84	77	76
o	7	91	83	78	75	83	75	82	74	80	74	73
2	8	88	80	75	72	79	72	78	71	77	71	70
	9	85	77	72	69	76	69	75	68	75	68	67
	10	82	74	69	66	73	66	73	66	72	66	64

Medium beam, 1500lm Engine, 108 lm/W at 14W

Candela Curve



4RN / C4L15935M / C4RDLCL

Output lumens:	1510 lms
Input watts:	14.0 W
CRI:	90 min
CCT 1:	3500K
Spacing Crit.:	0.92
Beam Angle:	54°

Zonal summary

Zone	Lumens	%Luminaire
0-30	1242	82.3%
0-40	1450	96.0%
0-60	1508	99.9%
0-90	1510	100.0%

Angle	Mean CP	Lumens
0 5	1859	
5	1871	
10	1924	180
15	1910	
20	1677	527
25	1204	
30	661	535
35	307	
40	154	208
45	69	
50	9	55
55	2	
60	1	3
65	1	
70	0	1
75	0	
80	0	C
85	0	
90	0	C

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	74	4.6'
6'	52	5.5'
7'	38	6.4'
8'	29	7.4'
9'	23	8.3'

^{*} Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.		
5'	70.0	0.62		
6'	46.0	0.41		
7'	32.0	0.29		
8'	27.0	0.24		
9'	22.0	0.19		
38' v 38' v 10' Room, Workplane 2 5'				

above floor, 80/50/20% Reflectances

Efficacy: 107.9 lm/W Report2: STMR-1613

Adjustment factors

CL = 100% 90CRI, 4000K = 102% 3000Im = 200% 90CRI, 3500K = 100% 2500Im = 167%	
CC = 93% 9CCRI, 3000K = 105% 2000lm = 107% CZ = 63% 90CRI, 2700K = 92% 1500lm = 1000lm = 67% BK = 57% 1000lm = 33%	6 6

Coefficients of utilization

Cei	ling		80)%		70	1%	50)%	30)%	0%
Wa	II	70	50	30	10	50	10	50	10	50	10	0
RC	R	Zona	al cav	ity me	ethod	- Eff	ectiv	e floo	r refl	ectar	ice =	20%
	0	119	119	119	119	116	116	111	111	106	106	100
0	1	114	111	109	107	109	105	105	102	101	99	94
ij	2	109	104	101	97	103	96	99	94	96	92	89
20	3	104	98	93	90	97	89	94	88	92	86	83
ΞŤ	4	99	92	87	83	91	83	89	82	87	81	79
a	5	95	87	82	78	86	77	84	77	83	76	74
Ö	6	90	82	77	73	81	72	80	72	79	72	70
Room Cavity Ratio	7	86	78	72	68	77	68	76	68	75	67	66
8	8	83	74	68	64	73	64	72	64	71	64	62
	9	79	70	65	61	70	61	69	61	68	60	59
	10	76	67	61	58	66	58	65	57	65	57	56


^{1.} Correlated Color Temperature within specs as defined in ANSI_NEMA_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

^{2.} Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.

Round Downlight

Wide beam, 1500lm Engine, 99 lm/W at 14W

Candela Curve



4RN / C4L15935W / C4RDLCL

Output lumens:	1385 lms
Input watts:	14.0 W
CRI:	90 min
CCT ¹ :	3500K
Spacing Crit.:	1.26
Spacing Crit.:	1.26
Beam Angle:	67°

Zonal summary

Zone	Lumens	%Luminaire
0-30	886	64.0%
0-40	1264	91.3%
0-60	1384	99.9%
0-90	1385	100.0%

Angle	Mean CP	Lumens
0 5	917	
5	941	
10	1025	93
15	1116	
20	1135	314
25	1063	
30	873	479
35	606	
40	366	378
45	134	
50	15	116
55	3	
60	2	4
65	1	
70	1	1
75	0	
80	0 0 0	0
85	0	
90	0	0

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*			
5'	37	6.3'			
6'	25	7.6'			
7'	19	8.8'			
8'	14	10.1'			
9'	11	11.3'			

^{*} Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.				
5'	63.0	0.62				
6'	42.0	0.41				
7'	29.0	0.29				
8'	25.0	0.24				
9'	20.0	0.19				
201 201 101 Dana Wardindon 0 El						

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 98.9 lm/W Report²: STMR-1641.1

Adjustment factors

Finish	CCT	Lumens			
CL = 100% CC = 95% CD = 87% CZ = 63% WH = 87% BK = 57%	90CRI, 4000K = 102% 90CRI, 3500K = 100% 90CRI, 3000K = 96% 90CRI, 2700K = 92%	3000lm = 200% 2500lm = 167% 2000lm = 133% 1500lm = 100% 1000lm = 67% 500lm = 33%			

Coefficients of utilization

Ceiling		80%		70%		50%		30%		0%		
Wal	I	70	50	30	10	50	10	50	10	50	10	0
RCR Zonal cavity meth				ethod	- Eff	ectiv	e floo	r refl	ectar	nce =	20%	
	0	119	119	119	119	116	116	111	111	106	106	100
Room Cavity Ratio	1	113	110	108	106	108	104	104	101	100	98	93
	2	107	102	98	95	101	93	97	91	94	89	86
	3	102	95	90	85	93	85	91	83	88	82	79
	4	96	88	82	78	87	77	85	76	83	75	73
	5	91	82	76	71	81	71	79	70	77	70	67
Ö	6	86	76	70	65	75	65	74	65	72	64	62
	7	81	71	65	60	70	60	69	60	68	59	58
	8	77	66	60	56	66	56	65	55	64	55	53
	9	72	62	56	52	62	52	61	51	60	51	50
	10	69	58	52	48	58	48	57	48	56	48	46

^{1.} Correlated Color Temperature within specs as defined in ANSI_NEMA_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

^{2.} Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.