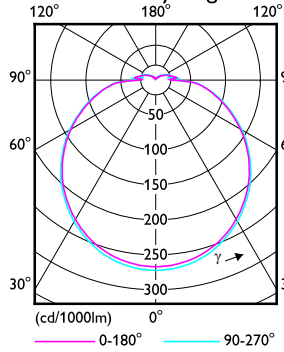


1 x Circline 22W 4000K 9290042360

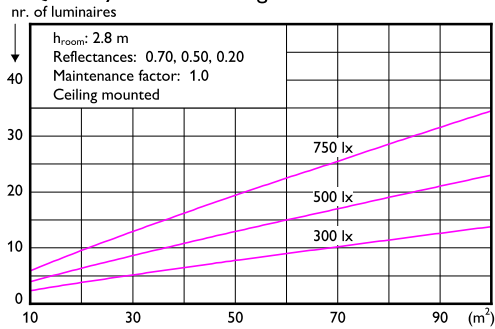
1 x 2600 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.09
 Service downward 0.91

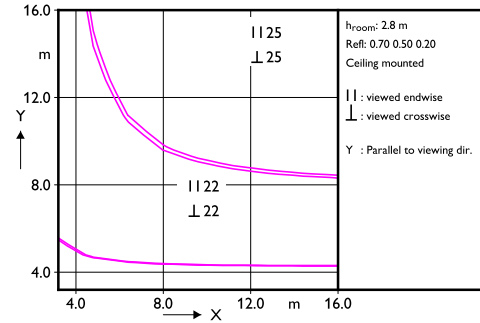
CIE flux code 40 70 89 91 100

UGRcen (4Hx8H, 0.25H) 23

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80			0.70			0.50			0.30		
	0.80	0.80	0.80	0.70	0.70	0.70	0.50	0.50	0.50	0.30	0.30	0.00
0.60	0.50	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.10	0.00
0.80	0.30	0.10	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00
1.00	0.60	0.41	0.40	0.60	0.41	0.40	0.31	0.27	0.30	0.26	0.23	0.23
1.25	0.62	0.57	0.56	0.60	0.58	0.56	0.40	0.34	0.38	0.33	0.30	0.30
1.50	0.70	0.64	0.63	0.68	0.65	0.63	0.46	0.41	0.45	0.40	0.37	0.37
1.75	0.76	0.69	0.68	0.74	0.71	0.68	0.53	0.48	0.51	0.47	0.43	0.43
2.00	0.86	0.77	0.75	0.83	0.79	0.75	0.58	0.53	0.56	0.52	0.48	0.48
2.50	0.93	0.82	0.80	0.89	0.84	0.80	0.66	0.62	0.64	0.60	0.56	0.56
3.00	0.98	0.85	0.83	0.94	0.88	0.83	0.72	0.67	0.69	0.65	0.61	0.61
4.00	1.04	0.90	0.88	1.00	0.93	0.88	0.75	0.72	0.73	0.69	0.65	0.65
5.00	1.08	0.93	0.91	1.03	0.97	0.91	0.80	0.77	0.77	0.75	0.70	0.70
							0.84	0.81	0.80	0.78	0.73	0.73

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	4142	4077	4046	4030	4041	4089	4211
50.0	4120	4038	3997	3989	4001	4060	4178
55.0	4109	4015	3963	3958	3985	4031	4170
60.0	4099	4006	3940	3938	3958	4027	4181
65.0	4135	4022	3948	3936	3966	4043	4209
70.0	4234	4083	3988	3974	4025	4123	4340
75.0	4482	4274	4158	4117	4191	4322	4606
80.0	4979	4668	4487	4433	4510	4697	5081
85.0	6031	5501	5231	5152	5303	5614	6325
90.0	4845	4008	3869	3712	3864	4281	5597

(cd/m²)

s20120042c

2024-11-05