



**1084/1002P1**  
Standard Incandescent

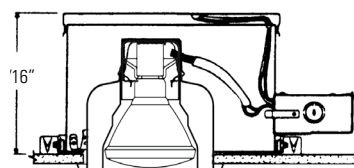

**1084/1000 IC Series**  
Incandescent Insulated Ceiling

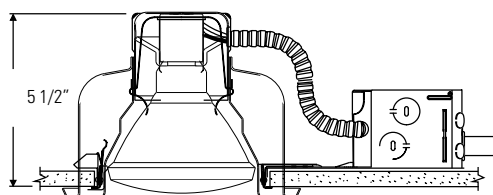

**1084/1003R**  
**Lytecasting™** Non-IC  
Remodeler

Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Cat.No: \_\_\_\_\_  
Type: \_\_\_\_\_  
Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_  
Notes: \_\_\_\_\_

Complete Fixture consists of Frame-In Kit & Reflector Trim. Select each separately.

#### Reflector Trim

#### Frame-In Kit - See Individual Frame-In Kit Specification Sheets

	Incandescent			
	Frame-In Kit	Ceiling Type	Lamping	Height
<b>1084WH</b> Gloss White <b>1084CD</b> Clear Diffuse	<b>1002P1</b>	Non IC	75W PAR30L Outdoor Rated* †	5 1/2"
	<b>1003R</b>	Non IC Remodeler	75W PAR30L Outdoor Rated* †	5 1/2"
	<b>1000IC</b>	IC	60W PAR30 Outdoor Rated*	7 5/16"
	<b>1000AICM</b>	AirSeal @ IC	60W PAR30 Outdoor Rated*	7 5/16"
	<b>1004ICX</b>	AirSeal @ IC	60W PAR30 Outdoor Rated*	7 1/4"

\* For safe operation, you must use Sylvania outdoor rated lamp. † (Use Socket Extender Accessory with Short Neck)

#### Features

- 1. Reflectors:** Formed aluminum, .040 minimum thickness; gloss white and clear diffuse finish.
- 2. Frame-In Kit:** (1002P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.
- 3. Gasket:** Flexible, high temperature silicone gasket ensure sealing of electrical components.

#### Accessories

LFG 356 - Replacement Gasket

#### Labels

U.L. (Suitable for Wet Locations - Covered Ceiling Only)

NEC® is a registered trademark of the National Fire Protection Association

