
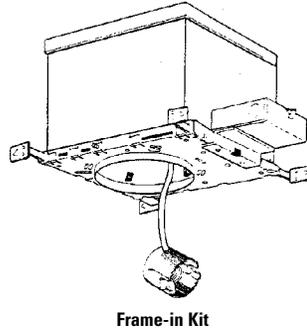


Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

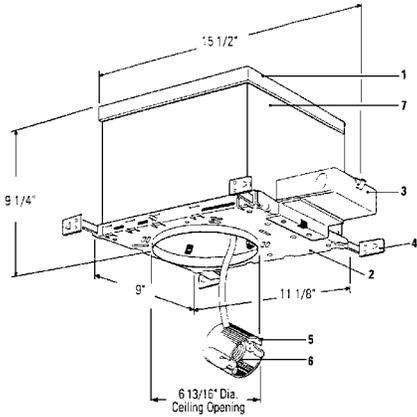

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Frame-In Kit	Reflector Trims — See Individual Reflector Trim Specification Sheets					
	Open Downlight				Adjustable	Enclosed Diffusers
	Reflector	Sloped Ceiling	Baffles	Basic White	Eyeball	
1100DICM	1144	1131WH	1105	1171	1182	1124
	1144CD	1133WH	1105WH			1126
	1146		1176			1128
	1146CD		1176WH			1134
	Cone:					1177SH
	1113					1178SH
	1113CD					1190
	1113WH					

1100DICM Lytecaster INC 6 3/4"

Deep IC frame

Features

- 1. Housing:** Walls .032" aluminum. Cover .026" galvanized steel. UL listed for direct contact with thermal insulation reduces heat loss. Access door for inspection of junction box.
- 2. Mounting Frame:** .036" (#20 ga.) galvanized steel. Accommodates all ceilings up to 1" thick. 3/8" deep integral lip. Four slots are positioned 90° apart to simplify alignment. Push-in/twist-out rotoclips hold reflector flush to ceiling.
- 3. Junction Box:** 2" X 4" X 4": .063" (#14 ga.) galvanized steel. UL listed for maximum of 6 No. 12 ga., 90° C through branch circuit conductors. Quick release "L" shaped cover for outside access to wiring. Access door inside of housing allows easy inspection of wiring without removal of housing. Integral cable clamps permit attachment of nonmetallic, Romex® without the need for additional connectors.
- 4. Mounting Bars:** .059" (#16 ga.) galvanized steel. Bars pivot for easy attachment and wire-in below ceiling line. Bars extend to accommodate 16" to 24" O. C. joist spacing and feature integral nail for secure attachment to wood construction. Attaches to T-bar ceilings without the need of accessories.

5. Socket Housing: Galvanized steel.

6. Socket: Porcelain medium base; nickel plated screw shell. Pre-wired with #18 ga. SF1 leads to junction box.

7. Thermal Protector: Meets NEC and UL requirements. Located inside housing.

Options & Accessories

Extra-Thick Ceiling Mounting Ring: **1967A** - up to 2" thick ceiling.

Labels

UL (Suitable for Damp Locations).

Romex® is a registered trademark of General Cables Industries Inc.

