


Day-Brite CFI

by @ignify

Recessed

Ariosio perf 2x4

T5, T5HO, or T8

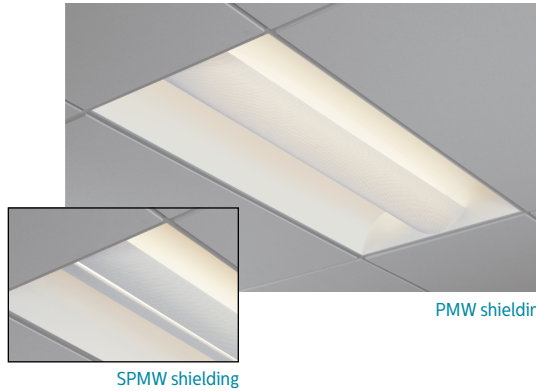

PMW shielding

SPMW shielding

Project: _____

Location: _____

Cat.No: _____

Type: _____

Lamps: _____ Qty: _____

Notes: _____

The Day-Brite / CFI Ariosio recessed perf offers simple clean lines in combination with soft natural illumination. With micro-perforated baskets and contoured seamless reflectors, this series focuses on providing smooth comfortable lighting while subtly complementing the space. Flexible enough to integrate with any architectural design, Ariosio recessed provides a soft unassuming glow with comfortable illumination to optimize work and recreational activities.

Ordering guide

Example: 2AVG232-PMW-UNV-1/2-EBLHE-LPT835HL

Width	Family	Ceiling Type	No. of Lamps (not included)	Lamp Type	Shielding	Voltage	Options
2	AV	G		—	—	—	
2 2'	AV Ariosio recessed perf	G Grid	2 3	28 28WT5 (46") 32 32WT8 (48") 54HO 54WT5HO (46")	PMW Perforated metal w/ white overlay SPMW 2-piece perforated metal with white overlay	120 277 347 UNV Universal Voltage 120-277V	1/2 One 2-lamp ballast 1/3 One 3-lamp ballast 1/21 2-lamp & 1-lamp ballasts 1/4 One 4-lamp ballast 2/2 Two 2-lamp ballasts EB Electronic ballast, <10% THD, std. ballast factor EB10R T8 electronic ballast, program rapid start, <10% THD EBHE T8 electronic ballast, high efficiency, std. ballast factor EBLHE T8 electronic ballast, high efficiency, low ballast factor EBHHE T8 electronic ballast, high efficiency, high ballast factor EBSD T8 electronic step dimming ballast, .88 ballast factor EBD7 Advance Mark 7 dimming ballast, 0-10V (low voltage) control EBDX Advance Mark 10 dimming ballast, phase control EBD Electronic dimming ballast, customer specified E1 B100 emerg. ballast, T8, 350-450 lumens, 120/277V E1CAN B100-CAN emerg. ballast, Canada market, T8, 350-450 lumens, 120/347V E7 B60 emerg. ballast, T8, 600-700 lumens, 120/277V E5 B50 emerg. ballast, U.S. or Canada market, T8, 1100-1400 lumens, UNV ESCAN B50-CAN emerg. ballast, Canada market, T8, 1100-1400 lumens, 120/347V ES5T B50ST emerg. ballast w/self test, T8, 1100-1400 lumens, UNV E7LP LP550 emerg. ballast T5/T5HO, 430-700 lumens, 120/277V E6LP LP600 emerg. ballast U.S. or Canada market, T5/T5HO, 750-1325 lumens, 120/277V F1 3/8" flex 3 wire, 18 gauge 6' F2 3/8" flex 4 wire, 18 gauge 6' F2/5W 3/8" flex, 5 wire 18 gauge 6' GLR Fusing, fast blow LPT830 Installed T8/T5/T5HO lamps, 80+ CRI, 3000K LPT835 Installed T8/T5/T5HO lamps, 80+ CRI, 3500K LPT841 Installed T8/T5/T5HO lamps, 80+ CRI, 4100K LPT830HL Installed T8/T5 high lumen lamps, 80+ CRI, 3000K LPT835HL Installed T8/T5 high lumen lamps, 80+ CRI, 3500K LPT841HL Installed T8/T5 high lumen lamps, 80+ CRI, 4100K CHIC Chicago plenum rated

Accessories (order separately)

- AVHD Hold down clips
- AV-DC4 Debris cover 2'x4'
- AV-GC4 Germ cover 2'x4'
- FMA24 2'x4' "F" mounting frame for NEMA "F" mounting



2AVG Arioso recessed perf 2x4

T5, T5HO or T8

Application

- Architectural recessed direct/indirect lighting for glare free illumination.
- Suitable for grid inverted T (NEMA "G") ceilings. Flange type ceilings (NEMA "F") require independently mounted flange kits (FMA).
- Fully recessed mounting, suitable for row mounting.

Construction/Finish

- Top reflector and end panels are formed together with no gaps.
- No visible welding, screws, latches, springs, hooks, rivets or plastic supports.
- Soft white baked enamel finish.
- Easy ballast access through lamp compartment.
- Optional hold down clips available (order separately: cat # AVHD).



Electrical

- cULus listed for damp locations.
- Self-contained fluorescent emergency power pack can be incorporated.

Enclosure

- Choice of one-piece (PMW) or two-piece (SPMW) lamp shield configuration.
- Micro-perforated mesh lamp shield provides soft awareness of light source.
- Soft white overlay on inside of micro-perforated mesh conceals lamp image and balances between reflected and direct light.
- Swing down lamp shield for easy relamping.
- Lamp shield end trim is included with PMW models for field installation if desired (not required).

Dimensions

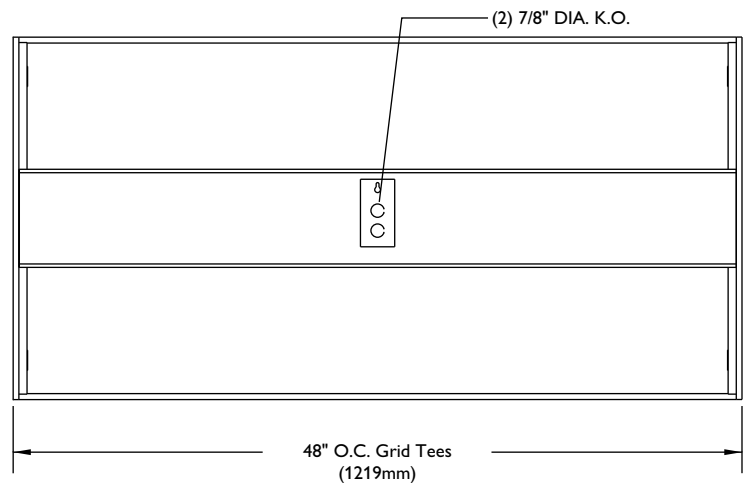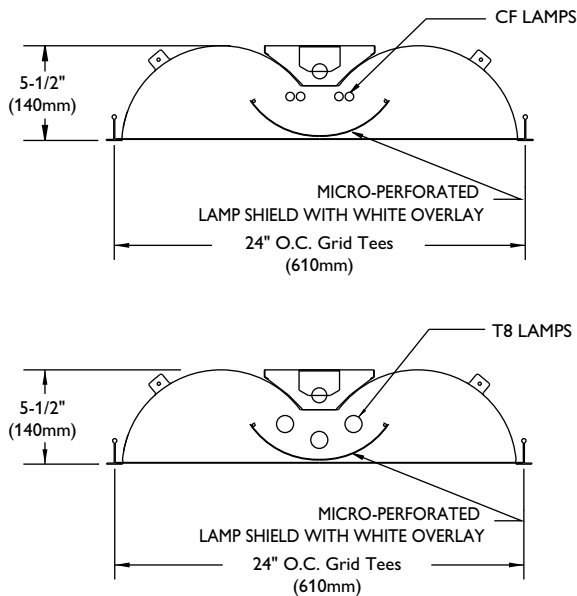

Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled, "Contain Mercury" and/or the symbol "HG". Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

2AVG Arioso recessed perf 2x4

T5, T5HO or T8

Photometry

Arioso recessed perf (PMW) 2x4 2 lamp T8

Efficiency – 68.6%

LER – 57

TER – 49

Catalog No.	2AVG232-PMW-1/2-EB	Candlepower				Light Distribution				Average Luminance			
		Angle	End	45	Cross	Degrees	Lumens	% Lamp	% Luminaire	Angle	End	45'	Cross
Test No.	25911	0	1290	1290	1290	0-30	1011	17.7	25.9	45	1617	1811	1956
S/MH	1.3	5	1295	1286	1278	0-40	1671	29.3	42.7	55	1487	1848	2036
Lamp Type	F32T8	10	1277	1270	1266	0-60	3042	53.4	77.8	65	1334	1854	1939
Lumens/Lamp	2850	15	1245	1244	1246	0-90	3912	68.6	100.0	75	1159	1481	1438
Ballast Factor	.88	20	1201	1210	1220					85	908	813	845
Input Watts	60	25	1144	1165	1183								
		30	1082	1114	1149								
		35	1007	1053	1106								
		40	918	991	1055								
		45	823	922	996								
		50	718	846	925								
		55	614	763	841								
		60	508	671	734								
		65	406	564	590								
		70	309	438	407								
		75	216	276	268								
		80	130	140	152								
		85	57	51	53								

Comparative yearly lighting energy cost per 1000 lumens – **\$4.21** based on 3000 hrs. and \$.08 pwr KWH.

The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.

Coefficients of Utilization

EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)

pcc	80				70				50			
pw	70	50	30		70	50	30		50	30		
RCR												
0	81	81	81		80	80	80		76	76		
1	75	70	68		72	69	67		67	64		
2	68	61	56		66	59	56		57	54		
3	60	54	47		59	53	47		51	46		
4	56	47	41		55	46	40		45	40		
5	51	41	35		50	41	35		40	34		
6	46	38	32		46	36	32		35	30		
7	44	34	28		42	34	28		33	28		
8	40	30	26		40	30	25		29	25		
9	38	28	23		36	28	23		28	23		
10	35	27	20		34	26	20		26	20		

Arioso recessed perf (PMW) 2x4 3 lamp T8

Efficiency – 64.9%

LER – 56

TER – 48

Catalog No.	2AVG332-PMW-1/3-EB	Candlepower				Light Distribution				Average Luminance			
		Angle	End	45	Cross	Degrees	Lumens	% Lamp	% Luminaire	Angle	End	45'	Cross
Test No.	25512	0	1836	1836	1836	0-30	1438	16.8	25.9	45	2337	2551	2692
S/MH	1.3	5	1843	1831	1813	0-40	2373	27.8	42.8	55	2157	2566	2794
Lamp Type	F32T8	10	1816	1808	1795	0-60	4297	50.3	77.5	65	1912	2569	2740
Lumens/Lamp	2850	15	1778	1776	1771	0-90	5547	64.9	100.0	75	1642	2178	2167
Ballast Factor	.88	20	1713	1722	1725					85	1275	1434	1466
Input Watts	87	25	1640	1660	1675								
		30	1551	1586	1619								
		35	1440	1496	1542								
		40	1321	1400	1462								
		45	1190	1299	1371								
		50	1044	1182	1272								
		55	891	1060	1154								
		60	736	927	1012								
		65	582	782	834								
		70	441	614	599								
		75	306	406	404								
		80	182	219	246								
		85	80	90	92								

Comparative yearly lighting energy cost per 1000 lumens – **\$4.29** based on 3000 hrs. and \$.08 pwr KWH.

The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.

Coefficients of Utilization

EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)

pcc	80				70				50			
pw	70	50	30		70	50	30		50	30		
RCR												
0	77	77	77		75	75	75		71	71		
1	69	67	64		68	66	63		63	60		
2	64	57	54		61	56	53		55	51		
3	57	51	46		56	50	45		47	44		
4	53	45	39		51	44	39		42	38		
5	48	40	34		46	39	34		38	33		
6	45	35	29		44	34	29		34	28		
7	41	33	27		40	32	27		30	26		
8	39	29	23		38	28	23		28	23		
9	35	27	22		34	27	22		26	20		
10	34	25	20		33	25	20		23	20		

2AVG Arioso recessed perf 2x4

T5, T5HO or T8

Arioso recessed perf (SPMW) 2x4 2 lamp T8

Efficiency – 57.9%

LER – 49

TER – 42

Catalog No. 2AVG232-SPMW-1/2-EB		Candlepower				Light Distribution				Average Luminance																																																																																																																																			
Test No.	26732	Angle	End	45	Cross	Degrees	Lumens	% Lamp	% Luminaire	Angle	End	45'	Cross																																																																																																																																
S/MH	1.4	0	1030	1030	1030	0-30	819	14.4	24.8	45	1307	1461	1671																																																																																																																																
Lamp Type	F32T8	5	1035	1027	1019	0-40	1362	23.9	41.2	55	1257	1597	1741																																																																																																																																
Lumens/Lamp	2850	10	1022	1019	1016	0-60	2547	44.7	77.1	65	1194	1627	1535																																																																																																																																
Ballast Factor	0.88	15	998	1002	1003	0-90	3304	58.0	100.0	75	1076	1175	1003																																																																																																																																
Input Watts	59	20	967	979	990					85	865	803	695																																																																																																																																
		25	925	950	975	Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20) <table><tr><td>pcc</td><td colspan="3">80</td><td colspan="3">70</td><td colspan="3">50</td></tr><tr><td>pw</td><td>70</td><td>50</td><td>30</td><td>70</td><td>50</td><td>30</td><td>50</td><td>30</td></tr><tr><td>RCR</td><td colspan="9"></td></tr><tr><td>0</td><td>68</td><td>68</td><td>68</td><td>67</td><td>67</td><td>67</td><td>64</td><td>64</td></tr><tr><td>1</td><td>63</td><td>59</td><td>56</td><td>60</td><td>58</td><td>56</td><td>56</td><td>54</td></tr><tr><td>2</td><td>56</td><td>52</td><td>47</td><td>55</td><td>51</td><td>46</td><td>48</td><td>46</td></tr><tr><td>3</td><td>52</td><td>45</td><td>40</td><td>50</td><td>44</td><td>40</td><td>42</td><td>39</td></tr><tr><td>4</td><td>46</td><td>40</td><td>34</td><td>46</td><td>39</td><td>34</td><td>38</td><td>33</td></tr><tr><td>5</td><td>42</td><td>35</td><td>29</td><td>41</td><td>34</td><td>29</td><td>34</td><td>28</td></tr><tr><td>6</td><td>40</td><td>32</td><td>27</td><td>39</td><td>30</td><td>26</td><td>29</td><td>26</td></tr><tr><td>7</td><td>36</td><td>28</td><td>23</td><td>35</td><td>28</td><td>23</td><td>27</td><td>23</td></tr><tr><td>8</td><td>34</td><td>26</td><td>20</td><td>33</td><td>26</td><td>20</td><td>25</td><td>20</td></tr><tr><td>9</td><td>32</td><td>23</td><td>19</td><td>30</td><td>23</td><td>19</td><td>23</td><td>19</td></tr><tr><td>10</td><td>29</td><td>22</td><td>17</td><td>28</td><td>22</td><td>17</td><td>20</td><td>17</td></tr></table>								pcc	80			70			50			pw	70	50	30	70	50	30	50	30	RCR										0	68	68	68	67	67	67	64	64	1	63	59	56	60	58	56	56	54	2	56	52	47	55	51	46	48	46	3	52	45	40	50	44	40	42	39	4	46	40	34	46	39	34	38	33	5	42	35	29	41	34	29	34	28	6	40	32	27	39	30	26	29	26	7	36	28	23	35	28	23	27	23	8	34	26	20	33	26	20	25	20	9	32	23	19	30	23	19	23	19	10	29	22	17	28	22	17	20	17
pcc	80			70										50																																																																																																																															
pw	70	50	30	70	50									30	50	30																																																																																																																													
RCR																																																																																																																																													
0	68	68	68	67	67									67	64	64																																																																																																																													
1	63	59	56	60	58									56	56	54																																																																																																																													
2	56	52	47	55	51									46	48	46																																																																																																																													
3	52	45	40	50	44									40	42	39																																																																																																																													
4	46	40	34	46	39									34	38	33																																																																																																																													
5	42	35	29	41	34									29	34	28																																																																																																																													
6	40	32	27	39	30									26	29	26																																																																																																																													
7	36	28	23	35	28									23	27	23																																																																																																																													
8	34	26	20	33	26	20	25	20																																																																																																																																					
9	32	23	19	30	23	19	23	19																																																																																																																																					
10	29	22	17	28	22	17	20	17																																																																																																																																					
		30	875	913	946																																																																																																																																								
		35	820	875	910																																																																																																																																								
		40	759	824	878																																																																																																																																								
		45	687	768	878																																																																																																																																								
		50	612	712	823																																																																																																																																								
		55	536	681	742																																																																																																																																								
		60	454	611	623																																																																																																																																								
		65	375	511	482																																																																																																																																								
		70	290	380	311																																																																																																																																								
		75	207	226	193																																																																																																																																								
		80	128	111	111																																																																																																																																								
		85	56	52	45																																																																																																																																								
Comparative yearly lighting energy cost per 1000 lumens – \$4.90 based on 3000 hrs. and \$.08 pwr KWH.																																																																																																																																													
The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.																																																																																																																																													

Arioso recessed perf (SPMW) 2x4 3 lamp T8

Efficiency – 52.0%

LER – 45

TER – 39

Catalog No.		2AVG332-SPMW-1/3-EB			
Test No.		26748			
S/MH		1.3			
Lamp Type		F32T8			
Lumens/Lamp		2850			
Ballast Factor		0.88			
Input Watts		87			
Comparative yearly lighting energy cost per 1000 lumens – \$5.33 based on 3000 hrs. and \$.08 pwr KWH. The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.		Candlepower			
		Angle	End	45	Cross
		0	1460	1460	1460
		5	1462	1456	1445
		10	1441	1439	1433
		15	1408	1413	1414
		20	1361	1375	1386
		25	1301	1327	1351
		30	1232	1272	1309
		35	1151	1207	1254
		40	1058	1136	1188
		45	957	1056	1121
50	851	966	1034		
55	736	870	930		
60	623	760	800		
65	506	636	628		
70	397	486	402		
75	280	290	252		
80	171	144	149		
85	74	63	57		

Light Distribution				Average Luminance			
Degrees	Lumens	% Lamp	% Luminaire	Angle	End	45'	Cross
0-30	1151	13.5	25.8	45	1821	2009	2133
0-40	1904	22.3	42.8	55	1727	2041	2182
0-60	3472	40.6	78.0	65	1611	2025	1999
0-90	4452	52.1	100.0	75	1456	1508	1310
				85	1142	973	880

Coefficients of Utilization									
EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)									
pcc	80			70			50		
pw	70	50	30	70	50	30	50	30	
RCR									
0	61	61	61	60	60	60	57	57	
1	56	54	52	55	53	51	51	48	
2	51	46	42	50	46	42	44	40	
3	46	40	36	45	40	35	39	34	
4	42	35	32	40	35	30	34	29	
5	39	32	27	38	32	27	30	27	
6	35	28	23	34	28	23	28	23	
7	33	26	22	32	26	20	25	20	
8	30	23	19	29	23	19	23	19	
9	28	22	17	28	22	17	20	17	
10	27	20	16	26	20	16	19	16	

