



Flexo Print

TLK 40W/10R 25PK

Flexo print TL lamps emit almost all of their light (99.9%) in the useful UVA and visible blue wavebands – between 350 and 400 nm – and have peak intensity at 370 nm (except for the /03 version). This makes them ideal for flexo printing equipment and photopolymerization processes. In addition, the ‘R’ lamps in the family have an internal 200-degree reflector to further optimize the lamp’s overall efficiency.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data

General Information		UV Depreciation at 500 h	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	10 %	
Life to 50% Failures (Nom)	2,000 hour(s)	Operating and Electrical	
Useful Life (Nom)	2,000 hour(s)	Power Consumption	40.5 W
Light Technical		Lamp Current (Nom)	0.86 A
Color Code	10-R	Voltage (Nom)	50 V
Color Designation	Ultra Violet A	Mechanical and Housing	
Chromaticity Coordinate X (Nom)	220	Bulb Shape	T38
Chromaticity Coordinate Y (Nom)	200	Net Weight (Piece)	0.344 lb
UV Depreciation at 1000 h	20 %		
UV Depreciation at 2000 h	30 %		

Flexo Print

Approval and Application

CE mark Yes

UV

UV-A Radiation 0Hr (IEC) 8.0 W

UV-A Radiation 100Hr (IEC) 7.4 W

Product Data

Order product name TL-K 40W UVA-1

Full product name TLK 40W/10R 25PK

Full product code 871150061223640

Order code 246751

Material Nr. (12NC) 928004101029


Numerator - Quantity Per Pack 1

EAN/UPC - Product/Case 8711500612236

Numerator - Packs per outer box 25


EAN/UPC - Case 8711500612243

Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-K 40W UVA-1	1-5/8 inch	23-1/4 inch	23-1/2 inch	23-7/16 inch	23-13/16 inch

Photometric data

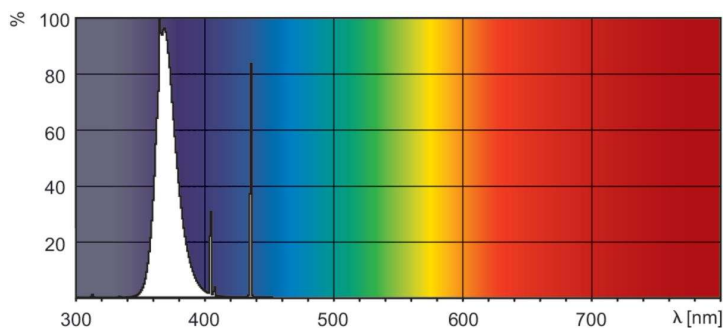

Spectral Power Distribution Colour - TL-K 40W UVA-1

