



TL-D Standard Colours

18 W G13 Cool daylight Linear fluorescent tube

TL-D Standard Colors lamps (tube diameter of 26 mm) create atmospheres from warm white to cool daylight. Lamps with moderate efficacy and color rendering.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information					
Cap-Base	G13 [Medium Bi-Pin Fluorescent]				
Nominal lifetime	13,000 hour(s)				
Life to 50% Failures (Nom)	13,000 hour(s)				
Light Technical					
Color Code	54-765				
Luminous Flux	1,050 lm				
Color Designation	Cool Daylight				
Correlated Color Temperature (Nom)	6200 K				
Color rendering index (CRI)	72				
Operating and Electrical					
Power Consumption	18.0 W				
Lamp Current (Nom)	0.360 A				
Voltage (Nom)	59 V				


Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Bulb Shape	Т8		
Net Weight (Piece)	0.070 kg		
Approval and Application			
Mercury (Hg) Content (Nom)	8.0 mg		
Energy Consumption kWh/1000 h	22 kWh		
Product Data			
Order product name	18 W G13 Cool daylight Linear fluorescent tube		
Full product name	18 W G13 Cool daylight Linear fluorescent tube		
Full product code	871150070267840		
Order code	928048005436		
Material Nr. (12NC)	928048005436		
Numerator - Quantity Per Pack	1		

Datasheet, 2024, March 31 data subject to change

TL-D Standard Colours


EAN/UPC - Product/Case	8711500702678	
Numerator - Packs per outer box	25	
EAN/UPC - Case	8711500727145	

Dimensional drawing

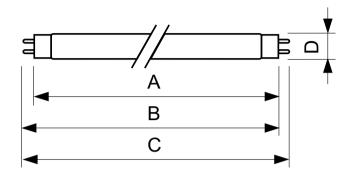


Product	D (max)	A (max)	B (max)	B (min)	C (max)
18 W G13 Cool daylight Linear	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
fluorescent tube					


Photometric data

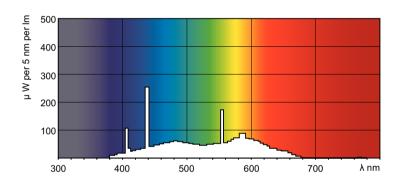

Spectral Power Distribution Colour - TL-D 18W/54-765 1SL/25

Lifetime

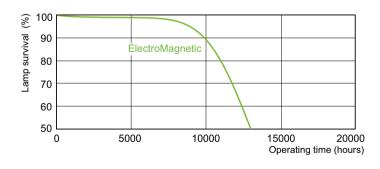




Life expectancy diagram - 3 hour cycle

Life expectancy diagram - 12 hour cycle

TL-D Standard Colours

Lifetime

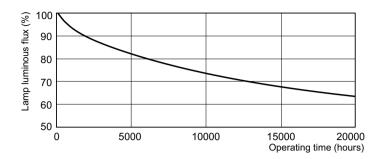

Lumen Maintenance Diagram - TL-D 18W/54-765 1SL/25

