



MSR Hot Restrike

MSR 400 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data


General Information		Color rendering index (CRI)	
Cap-Base	GZZ9.5	Arc Length O (Nom)	6.0 mm
Operating Position	UNIVERSAL [Any or Universal (U)]	Operating and Electrical	
Life to 50% Failures (Nom)	1,000 hour(s)	Power Consumption	400 W
Light Technical		Lamp Current (Nom)	7 A
Color Code	- [Not Specified]	Controls and Dimming	
Luminous Flux (Min)	28,080 lm	Dimmable	Yes
Luminous Flux	31,200 lm	Mechanical and Housing	
Chromaticity Coordinate X (Nom)	326	Net Weight (Piece)	0.075 lb
Chromaticity Coordinate Y (Nom)	321		
Correlated Color Temperature (Nom)	5830 K		
Luminous Efficacy (rated) (Nom)	78 lm/W		

MSR Hot Restrike

Approval and Application	
CE mark	Yes
Product Data	
Order product name	MSR 400 HR 1CT/4
Full product name	MSR 400 HR 1CT/4
Full product code	871829122796000
Order code	287268


Material Nr. (12NC)	928050205115
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291227960
Numerator - Packs per outer box	4
EAN/UPC - Case	8718291227977

Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 400	15/16	1/4	2-3/8	2-7/16	2-3/8	4-3/8	1 inch	15/16	15/16
HR 1CT/4	inch	inch	inch	inch	inch	inch		inch	inch

Photometric data

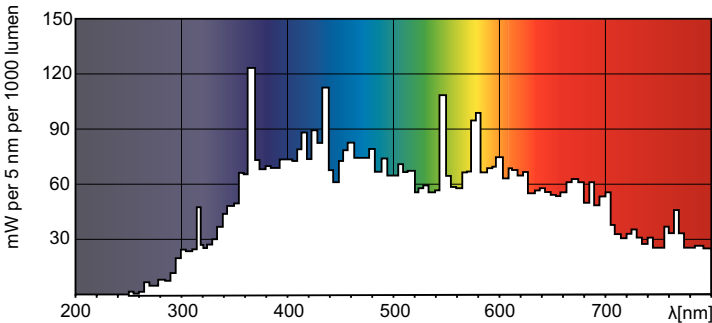

Spectral Power Distribution Colour - MSR 400 HR 1CT/4

