



LEDLamps

LEDGlobe 10-75W G120 B22 WW 230V_AU

LED Lamps are a perfect fit for general lighting applications. Compatible with most existing fixtures and designed as a retrofit replacement for incandescent and halogen lamps, LED Lamps deliver huge energy savings and minimize maintenance cost


Product data

General Information			
Cap-Base	B22	Lamp Current (Nom)	75 mA
Nominal lifetime	15,000 hour(s)	Wattage Equivalent	75 W
Switching Cycle	50,000	Starting Time (Nom)	0.5 s
Rated Lifetime (Hours)	15,000 hour(s)	Warm-up time to 60% light	0.5 s
Lighting Technology	LED	Power Factor (Fraction)	0.7
EU RoHS compliant	Yes	Voltage (Nom)	220-240 V
Light Technical		Temperature	
Color Code	827 [CCT of 2700K]	Ambient temperature range	-20 to +45 °C
Color Code	827 [CCT of 2700K]	T-Case Maximum (Nom)	50 °C
Beam Angle (Nom)	150 degree(s)	Controls and Dimming	
Luminous Flux	1,055 lm	Dimmable	No
Color Designation	Warm White (WW)	Mechanical and Housing	
Correlated Color Temperature (Nom)	2700 K	Bulb Finish	Frosted
Luminous Efficacy (rated) (Nom)	105 lm/W	Bulb Material	Plastic
Color Consistency	<6	Bulb Shape	G120
Color rendering index (CRI)	80	Approval and Application	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Energy Consumption kWh/1000 h	10 kWh
Operating and Electrical		EyeComfort	Yes
Input Frequency	50 to 60 Hz		
Power Consumption	10 W		

LED Innovations	EyeComfort
Product Data	
Order product name	LEDGlobe 10-75W G120 B22 WW 230V_AU
Full product name	LEDGlobe 10-75W G120 B22 WW 230V_AU
Full product code	871869673240300
Order code	929002442369


Material Nr. (12NC)	929002442369
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696732403
Numerator - Packs per outer box	3
EAN/UPC - Case	8719514271715

Dimensional drawing

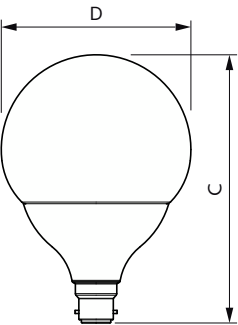


Product	D	C
LEDGlobe 10-75W G120 B22 WW 230V_AU	120 mm	168 mm


Photometric data

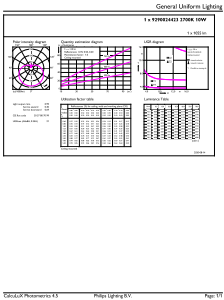

General uniform lighting - LEDGlobe 10-75W G120 B22 WW 230V_AU

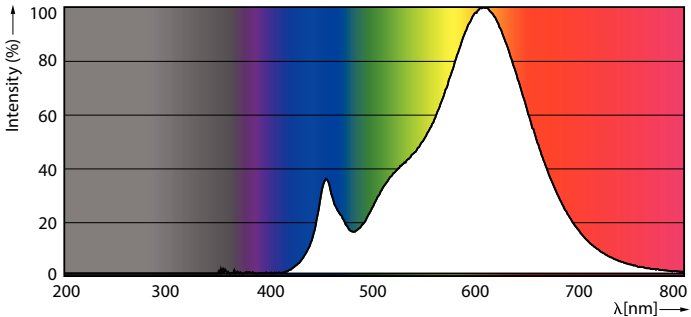

Spectral Power Distribution Colour - LEDGlobe 10-75W G120 B22 WW 230V_AU

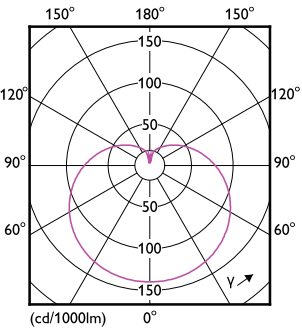

Light Distribution Diagram - LEDGlobe 10-75W G120 B22 WW 230V_AU

Lifetime



Life Expectancy Diagram - LEDGlobe 10-75W G120 B22 WW 230V_AU



Lumen Maintenance Diagram - LEDGlobe 10-75W G120 B22 WW 230V_AU

