



Xitanium Long-lasting and low maintenance, LED-based light sources are an excellent solution for all lighting applications. For optimal performance, these solutions require reliable drivers matching the long lifetime of the LEDs. The Advance Xitanium LED outdoor driver portfolio offers a range of products specially designed to operate LED solutions in outdoor applications. These drivers are designed for hard-wired integration into outdoor luminaires for the most rugged applications. They operate to specification under wide temperature and electrical ranges to ensure reliability.


Specifications

Input Voltage (Vac)	Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency @ Max Load	Max Case Temp. (°C) Life/UL	Input Current (A)	Input Power (W)	THD @ Max Load (%)	Power Factor @ Max Load	Surge Protect (Combi Wave, KV)	Dimming	Dimming Range (%)	Min Dimming Current (mA)	Drive Type
120	95	20-54	0.1-2.75	88.4	85 / 90	0.92	110	<10	>0.95	6	0-10V	5-100	30	CC
277				89.8		0.39	110	<10	>0.95					


Enclosure

Item	In(mm)	Tolerance (mm)
Overall length (A1)	9.45(240)	+/-0.5
Mounting Length (A2)	8.89(225.8)	+/-0.5
Case Length (A3)	8.4(213.4)	+/-0.5
Case Width (B1)	1.69(43)	+/-0.5
Case Height (C1)	1.13(28.8)	+/-1
Mounting Hole Diameter (D1)	0.31(7.9)	+/-0.3
Center of SimpleSet antenna (G1)	2.31(58.7)	+/-3

Mechanical Diagram

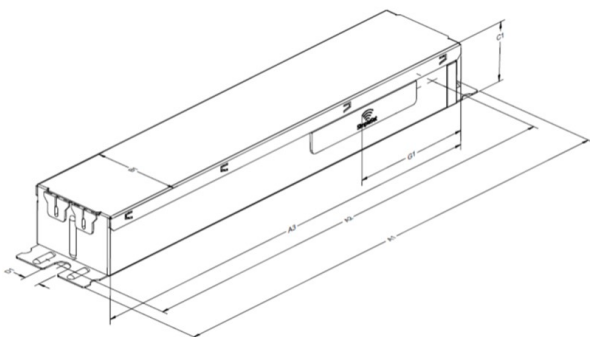

Wiring Diagram

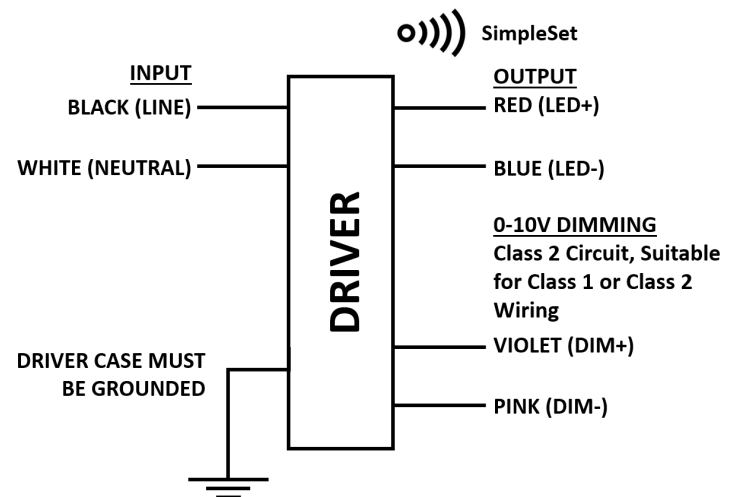

- Wire Length: 270 mm with 30 mm tolerance.
- Install in accordance with national and local electrical codes.
- The field-wiring leads or push-in terminals shall be fully enclosed.

XI095C275V054BSS2

Features

- 50,000+ hour lifetime
- Excellent thermal performance
- 0-10V dimming suitable for UL Class 1 and Class 2 wiring

Benefits

- Enables long life luminaire designs
- Helps to maximize energy savings and allows application specific light levels
- Allows luminaire designs for ambient environments

Application

- Area
- Roadway
- Parking garages
- Floodlights
- High-bay, Mid-bay, Low-bay fixtures

Logistical data

Specification item	Value
Product name	XI095C275V054BSS2
EOC	XI095C275V054BSS2
Logistic code 12NC	9290 027 20713
Product code	XI095C275V054BSS2M
Pieces per box	10
Weight	680 gram

All the specifications are typical and at $T_{\text{ambient}} = 25^{\circ}\text{C}$ unless specified otherwise

Electrical input data

Specification item	Value	Value	Unit	Condition
Rated input voltage range	108...305		V_{ac}	Performance range
Rated input voltage	120	277	V_{ac}	
Rated input frequency	50...60	50...60	Hz	Performance range
Rated input current	0.92	0.39	A	@ rated output power @ rated input voltage
Rated input power	110.0	110.0	W	@ rated output power @ rated input voltage
Efficiency	≤ 88.4	≤ 89.8	%	@ rated output power @ rated input voltage

Electrical output data

Specification item	Value	Unit	Condition
Output voltage	20...54	V_{dc}	Class 2 Output
Output voltage max.	60	V	Open Circuit Voltage
Output current	100...2750	mA	
Output current min programmable	100	mA	
Min output current	30	mA	
Output current tolerance $\pm$	5	%	within performance window
Output current ripple LF	≤ 15	%	@ max lout
Output current ripple LF	≤ 4	%	@ frequency range 60Hz-3KHz
Output $P_{\text{st}}^{\text{LM}}$	≤ 1.0		Flicker in compliance per NEMA 77
Output SVM	≤ 1.0		Flicker in compliance per NEMA 77
Output power	0.6...95.0	W	
Minimum performance output power	32	W	Power factor > 0.9 and THD < 20%

XI095C275V054BSS2

Control interfaces

Specification item	Value	Unit	Condition
Control method	0-10V		
Dimming range	5...100	%	Default range
Dimming Source Current	0.15	mA	
Maximum Dimming Voltage	12	V	
Dimming Leakage Current	0.01	mA	Max number of driver in parallel, refer to Design-in Guide

Isolation

U = Max. input voltage

Isolation per UL-8750	Input	Output	0-10V	Enclosure
Input	-	2U + 1kVac	2U + 1kVac	2U + 1kVac
Output	2U + 1kVac	-	2U + 1kVac	500Vac
0-10V	2U + 1kVac	2U + 1kVac	-	2U + 1kVac
Enclosure	2U + 1kVac	500Vac	2U + 1kVac	-


Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-40...+55	°C	Higher ambient temperature allowed as long as Tcase-max is not exceeded
Tcase-UL	90	°C	Max. temperature measured at T _{case} -point
Tcase-life	85	°C	C10 = 50000 hours measured at T _c -point

Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	50,000	hours	Measured temperature at Tcase-point is Tcase-life. Maximum failures = 10%

XI095C275V054BSS2

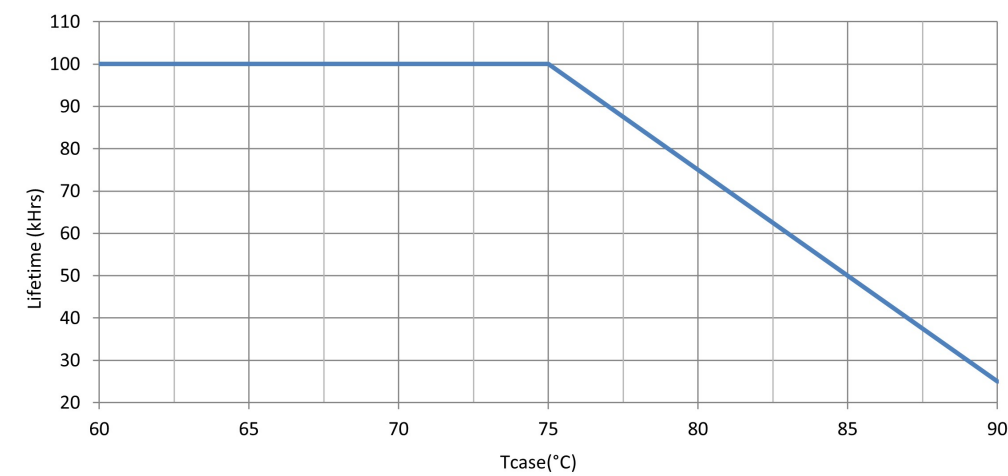

Maximum failures = 10%

Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	NFC, SimpleSet	2300 mA	
Driver Temperature Limit (DTL)	Yes		
Adjustable Light Output (ALO)	Yes		
0-10V	Yes		
Min Dim Level (%)	Yes		
OEM Write Protection (OWP)	Yes		


Non-programmable features

Specification item	Value		Condition
Open load protection	Yes		Automatic recovering
Short circuit protection	Yes		Automatic recovering
Over power protection	Yes		Automatic recovering
Overtemperature protection	Yes		Automatic recovering

XI095C275V054BSS2

Inrush current

Specification item	Value	Unit	Condition
Inrush current	39.1	A	Input voltage 120V
Inrush current	96.7	A	Input voltage 277V
Inrush peak width	127	μs	Input voltage 120V, measured at 10% height
Inrush peak width	151	μs	Input voltage 277V, measured at 10% height

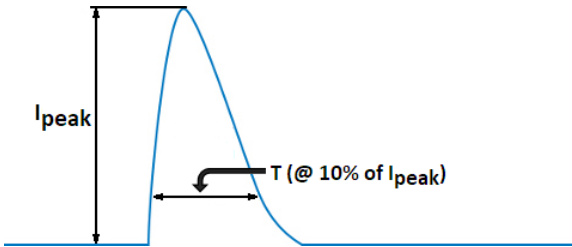

Surge immunity

Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	6	kV	ANSI Surge Type 1.2/50us Combination Wave (w/t 2 ohm)
Mains surge immunity (comm. mode)	6	kV	ANSI Surge Type 1.2/50us Combination Wave (w/t 2 ohm)


Approbation

Specification item	Value
Approval Marks / Agency Approbations	NOM / RoHS / UL Class P / UL Listed US & Can
EMI standards	FCC Title 47 Part 15; Class A
Environmental protection rating	UL damp & dry, Type HL
Audible Noise	<24dB Class A

XI095C275V054BSS2


Graphs

Operating window

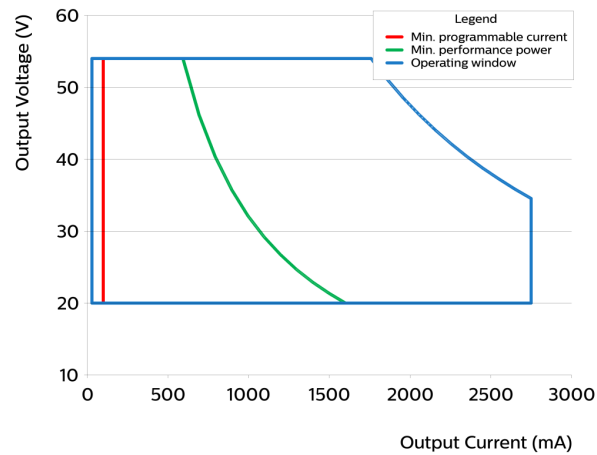

- Factory default output current is 2.3A.
- To get a 100% to 5% dimming range, the output current setting through AOC should be $\geq 0.3A$.
- Factory default minimum dimming is 10%. This can be adjusted between 5% and 100% using Advance MultiOne.


Over Temperature Protection

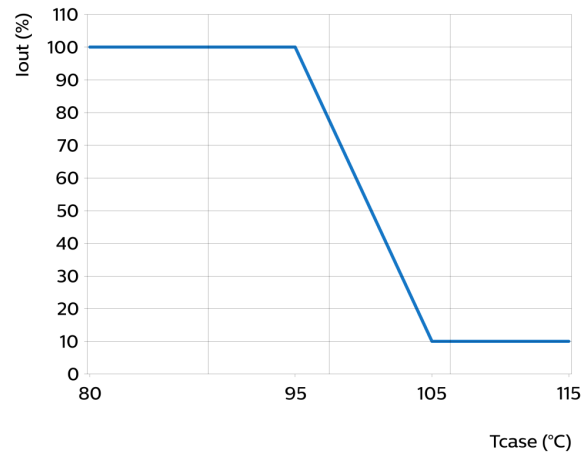


Adjustable via DTL with MultiOne Programming

XI095C275V054BSS2

Power factor versus output power

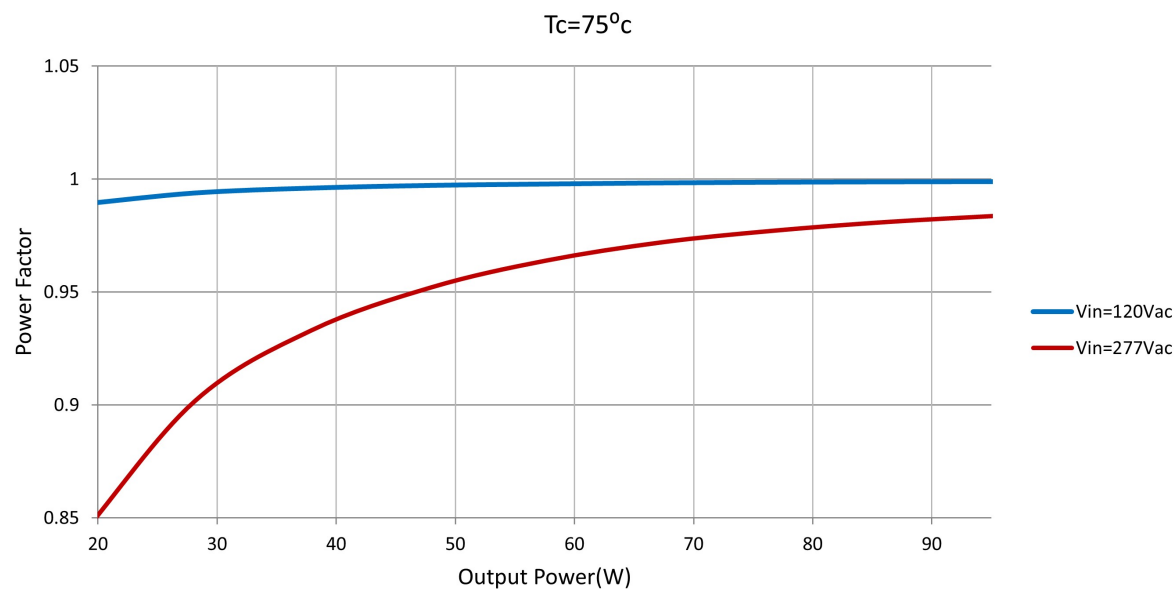


THD versus output power

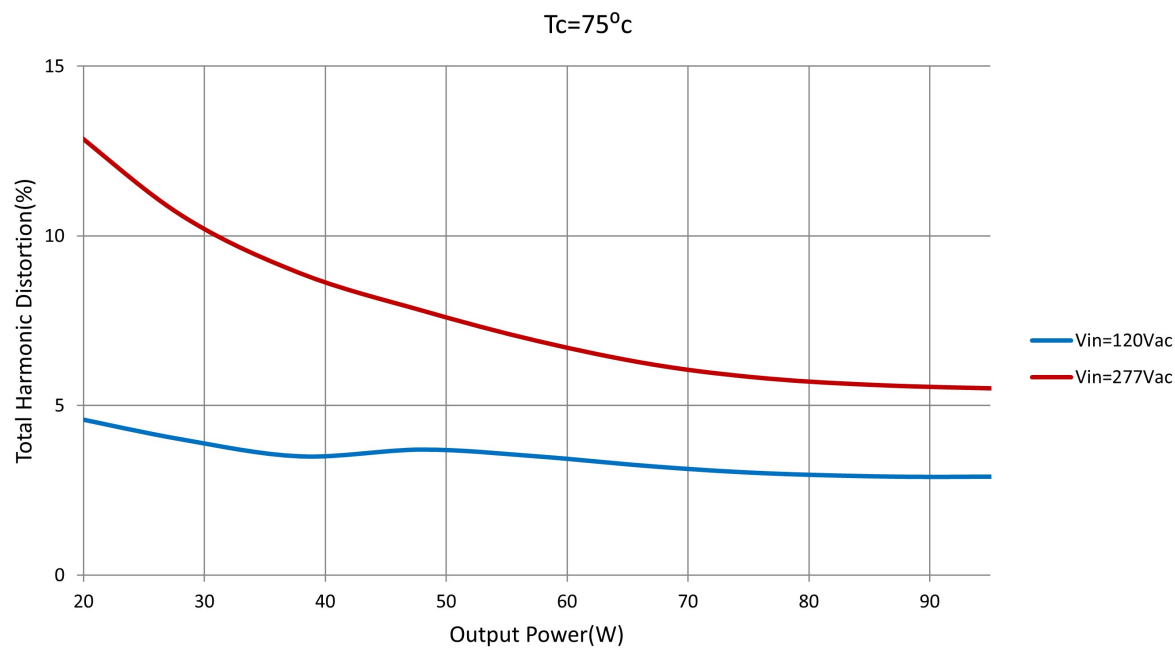


XI095C275V054BSS2


I_out as function of 0-10V interface

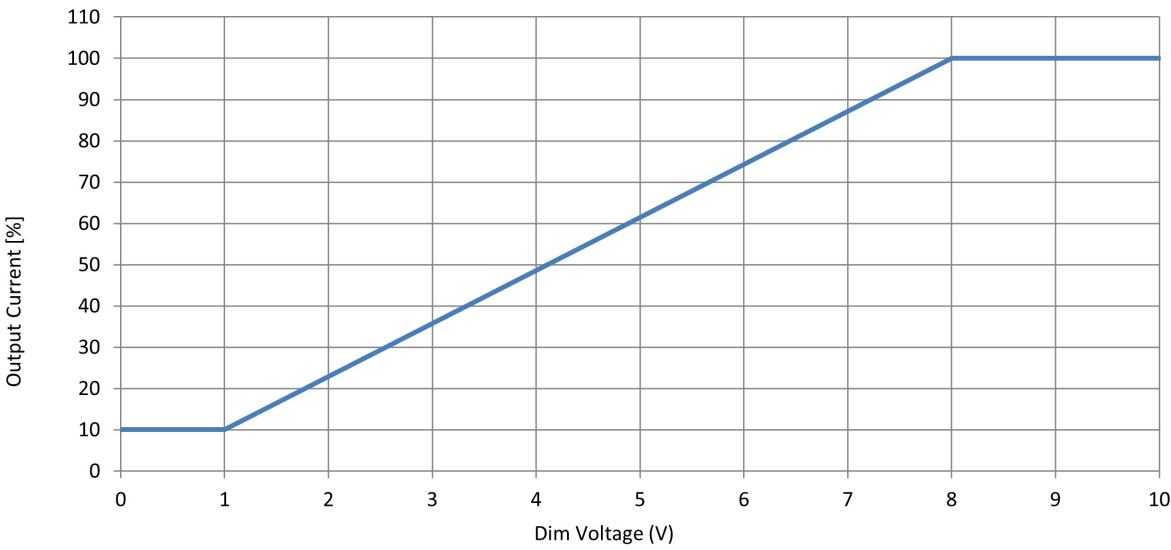

Efficiency as function of V_{out}

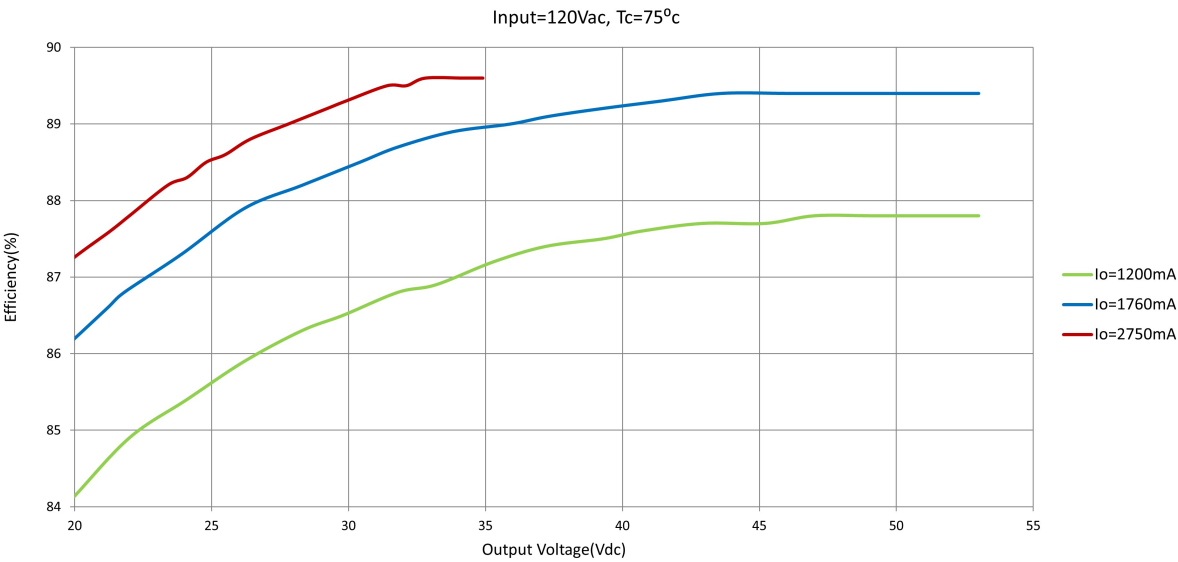

XI095C275V054BSS2

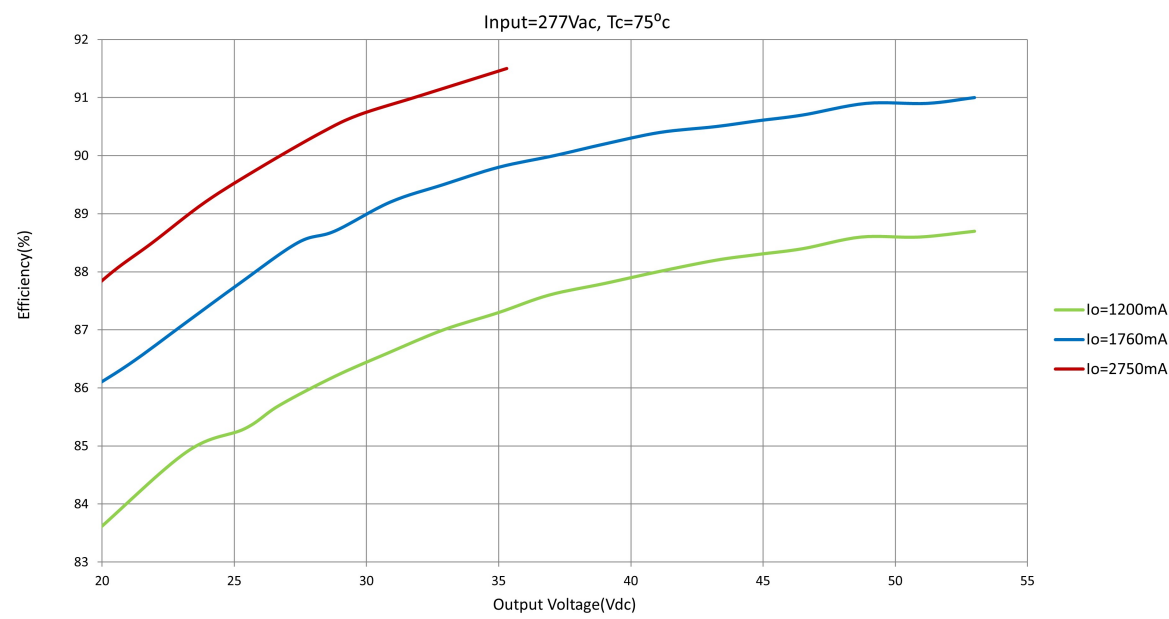

Appendix

Approved Dimmer List

Manufacturer	Manufacturer Part Number
Lutron	Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver
Leviton	IllumaTech IP7 series
Philips	Sunrise - SR1200ZTUNV

