



MASTER LED spot ExpertColor AR111



MAS ExpertColor 10.8-50W 930 AR111 24D

MASTER, LEDspot, AR111, 50 W, G53, 3000 K, 620 lm, CRI 95, 40000 h

The MASTER LEDspot LV ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. It creates ambience with superior lighting that has a customised spectrum, high CRI and deep dimming features. The result? A beautiful lighting experience. What's more, the innovative, trimless lens design will also suit almost any interior decor with its clean and neat look. In addition, you can take advantage of the full ExpertColor family, which also includes LEDspot LV and LEDspot Par lamps.

Product data

General Information	
Cap base	G53
Nominal lifetime	40,000 h
Switching Cycle	50,000
Lighting Technology	LEDspot
Flux measurement reference	Narrow Cone
Warranty period	5 years
Light Technical	
Colour Code	930 [CCT of 3000K]
Beam angle (nom.)	24 degree(s)
Luminous Flux	620 lm
Luminous intensity (nom.)	3,200 cd
Colour designation	White (WH)

Correlated Colour Temperature (Nom)	3000 K
Luminous efficacy (rated) (nom.)	57 lm/W
Colour consistency	<4
Colour rendering index (CRI)	95
LLMF at end of nominal lifetime (nom.)	70 %
Luminous flux in 90° cone (rated)	620 lm
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	10.8 W
Lamp current (nom.)	1,000 mA
Wattage equivalent	50 W

MASTER LED spot ExpertColor AR111

Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (nom.)	ac electronic 12 V

Temperature

T-Case maximum (nom.)	70 °C
-----------------------	-------

Controls and Dimming

Dimmable	Only with specific dimmers
----------	----------------------------

Mechanical and Housing

Lamp Finish	Clear
Bulb shape	AR111
Net Weight (Piece)	0.160 kg

Approval and Application

Energy Efficiency Class	G
Suitable for accent lighting	Yes
Energy consumption kWh/1,000 hours	11 kWh
EPREL Registration Number	648247
CE mark	Yes

EU RoHS compliant	Yes
EyeComfort	Yes
Ambient temperature range	-20 to +45 °C


Application Conditions

Can it be used in closed luminaires	No
-------------------------------------	----

Product Data

Order product name	MAS ExpertColor 10.8-50W 930 AR111 24D
Full product name	MAS ExpertColor 10.8-50W 930 AR111 24D
Full EOC	871951433399400
Order code	929003043602
Material no. (12 NC)	929003043602
Numerator – quantity per pack	1
EAN/UPC – Product/Case	8719514333994
Numerator – packs per outer box	6
EAN/UPC - Case	8719514334007



Dimensional drawing

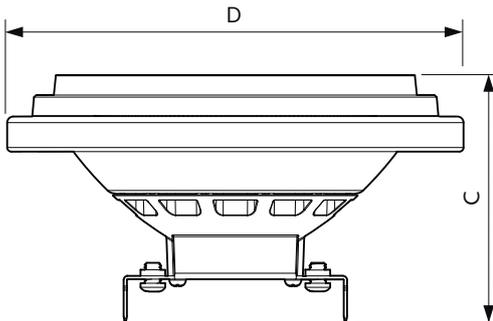

Product	D	C
MAS ExpertColor 10.8-50W 930 AR111 24D	111 mm	61 mm


MASTER LED spot ExpertColor AR111

Photometric data

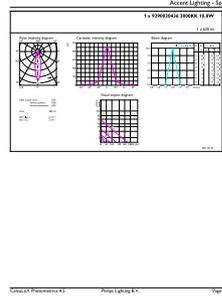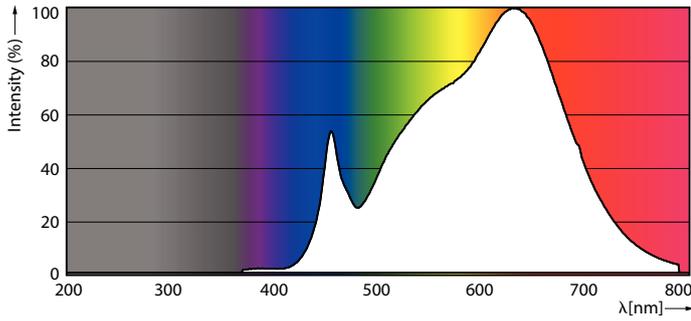


Spectral Power Distribution Colour - MAS ExpertColor 10.8-50W 930 AR111 24D

Accent Lighting Spots - MAS ExpertColor 10.8-50W 930 AR111 24D

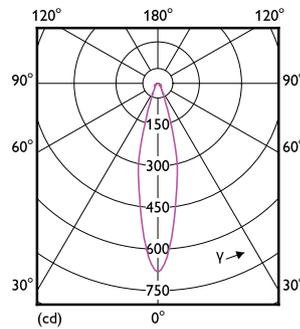


Light Distribution Diagram - MAS ExpertColor 10.8-50W 930 AR111 24D

Lifetime

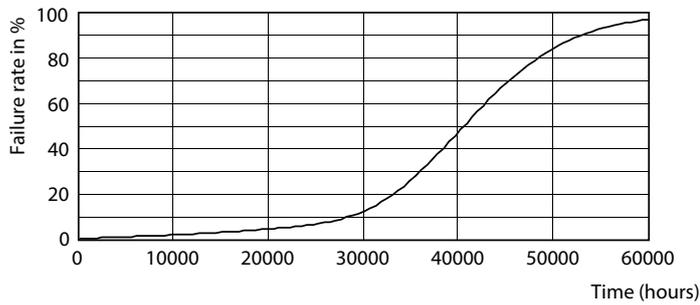

Life Expectancy Diagram

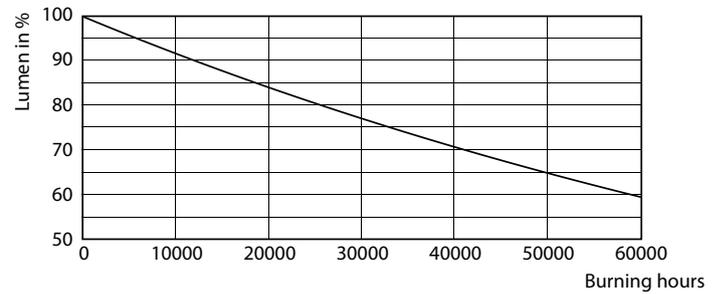

Lumen Maintenance Diagram - MAS ExpertColor 10.8-50W 930 AR111 24D

MASTER LED spot ExpertColor AR111

