



CoreLine Malaga LED

BRP101 LED37/740 II DM SDM10

CoreLine Malaga LED small – LED module 3700 lm – Power supply unit – Safety class II – Distribution medium – Universal for diameter 42 to 60 mm adjustable

The CoreLine Malaga LED family consists of two sizes and uses a Philips standardized design LED engine as light source and a Philips Xitanium fixed output outdoor driver. Quality you can rely on.;At the same time, the investment in a CoreLine Malaga LED luminaire is in many cases on the same level as an old SON-T luminaire including the first lamp. As the LED light engine in CoreLine Malaga LED will last the lifetime of the luminaire, just by saving the multiple lamp replacements needed with SON-T will already return the investment in it.Ease of installation is obtained through the extended gland feature; the luminaire does not need to be opened to connect the power cable. At the same time, the flat glass cover can be removed to allow access to the driver for maintenance if required. Adding up the functions and features truly make the choice for CoreLine Malaga LED an easy decision. As a member of the CoreLine family, Malaga LED is easy and quick available thru Philips Partners near you.;CoreLine Malaga LED has been designed as efficient as possible, with the same performance as the SON-T 50, 70, 100 and 150W luminaires it replaces; provide the right amount of light in the right place. The medium beam (DM) optic delivers an efficient distribution onto the road. The combination results in interesting energy savings which reduce operating costs significantly. 50% energy reduction is realistically possible.;Special versions with several options are available. As these are specials, and manufactured to order received only, these specials do have a longer delivery time. Options available are:;Wide beam (DW) optic;Added surge protection device 10kV (SRG10);Marine Salt Protection (MSP) paint finish;Micro Mini Pro photocell 35 Lux;Build in (glass) fuse 6A;3 meters external flying lead cable (H07RN-F);Not all these options can always be combined with each other. Please consult your Philips partner for details in case of interest or doubt.

CoreLine Malaga LED

Product data

General Information	
Lamp family code	LED37 [LED module 3700 lm]
Light source color	740 neutral white
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	Power supply unit
Driver included	Yes
Optical cover/lens type	Flat glass
Luminaire light beam spread	-
Control interface	-
Connection	Push-in connector and pull relief
Cable	-
Protection class IEC	Safety class II
Flammability mark	-
CE mark	CE mark
ENEC mark	ENEC mark
Warranty period	5 years
Optic type outdoor	Distribution medium
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB of 16 A type B	11
EU RoHS compliant	Yes
Light source engine type	LED
Product family code	BRP101 [CoreLine Malaga LED small]
Service tag	Yes
Light Technical	
Upward light output ratio	0
Standard tilt angle posttop	-
Standard tilt angle side entry	0°
Operating and Electrical	
Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Initial CLO power consumption	N/A W
Average CLO power consumption	N/A W
End CLO power consumption	N/A W
Inrush current	7.1 A
Inrush time	61.2 ms
Power Factor (Min)	0.98
Controls and Dimming	
Dimmable	No


Mechanical and Housing	
Housing Material	Aluminum die cast
Reflector material	-
Optic material	Polymethyl methacrylate
Optical cover/lens material	Tempered glass
Fixation material	Aluminum
Mounting device	Universal for diameter 42 to 60 mm adjustable
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Overall length	333 mm
Overall width	197 mm
Overall height	78 mm
Overall diameter	360 mm
Effective projected area	0.016478 m²
Color	Gray
Dimensions (Height x Width x Depth)	78 x 197 x 333 mm (3.1 x 7.8 x 13.1 in)
Approval and Application	
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Surge Protection (Common/Differential)	Luminaire surge protection level until 10 kV differential mode and 10 kV common mode
Initial Performance (IEC Compliant)	
Initial luminous flux (system flux)	3054 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	103 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	70
Initial chromaticity	(0.41, 0.39) SDCM ≤5
Initial input power	29.6 W
Power consumption tolerance	+/-11%
Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 100000 h	10 %
Lumen maintenance at median useful life* 100000 h	L70
Application Conditions	
Ambient temperature range	-40 to +35 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Product Data	
Full product code	871869980583800
Order product name	BRP101 LED37/740 II DM SDM10
EAN/UPC - Product	8718699805838
Order code	910770207496

CoreLine Malaga LED

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910770207496
Net Weight (Piece)	2.200 kg




Dimensional drawing

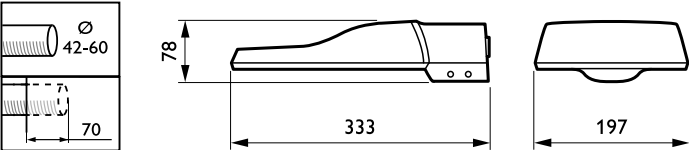


CoreLine Malaga LED BRP101/102

Photometric data



OFPL1_BRP101T251xLED37740DM



OFPC1_BRP101T251xLED37740DM

