


BVP150 LED25 NW 30W SWB 1 x LED

1 x 2495 lm


Polar intensity diagram

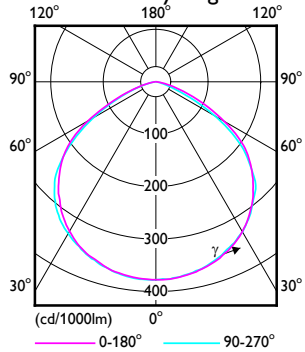

Light output ratio 1.00
 Service upward 0.00
 Service downward 1.00

CIE flux code 52 87 99 100 100

Quantity estimation diagram

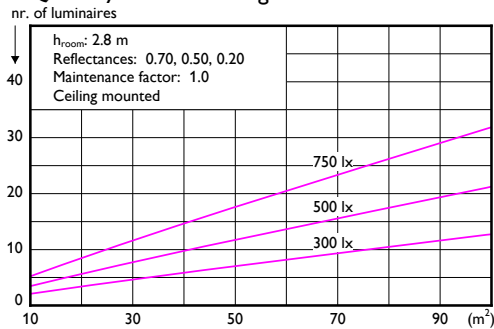

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.80	0.62	0.58	0.61	0.59	0.58	0.50	0.30	0.10	0.30	0.10	0.00	0.00
1.00	0.71	0.66	0.70	0.68	0.66	0.59	0.58	0.53	0.57	0.53	0.51	0.51
1.25	0.80	0.74	0.79	0.76	0.73	0.67	0.66	0.61	0.65	0.61	0.59	0.59
1.50	0.87	0.79	0.85	0.81	0.78	0.72	0.71	0.67	0.70	0.67	0.64	0.64
2.00	0.97	0.87	0.95	0.90	0.86	0.81	0.80	0.76	0.78	0.75	0.73	0.73
2.50	1.03	0.91	1.00	0.95	0.90	0.86	0.85	0.82	0.83	0.81	0.78	0.78
3.00	1.08	0.94	1.05	0.99	0.93	0.90	0.88	0.86	0.87	0.85	0.82	0.82
4.00	1.13	0.98	1.10	1.03	0.97	0.94	0.92	0.90	0.91	0.89	0.86	0.86
5.00	1.16	1.00	1.13	1.05	0.99	0.97	0.95	0.93	0.93	0.92	0.89	0.89

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	92318	92276	92671	93503	94336	94669	94502
50.0	90344	90685	91368	92393	91022	89837	88838
55.0	86297	87535	87789	87058	84063	81823	80338
60.0	75317	77313	77145	74813	70100	66923	65284
65.0	60810	62486	60698	55444	49900	45959	43621
70.0	45258	45403	42442	36374	30972	27094	24740
75.0	30669	29918	27004	21927	17950	15261	13860
80.0	19595	18541	16219	12628	10051	8337	7485
85.0	13109	12117	10294	7642	5371	3931	3320
90.0	-	-	-	-	-	-	-

(cd/m²)

2018-10-25