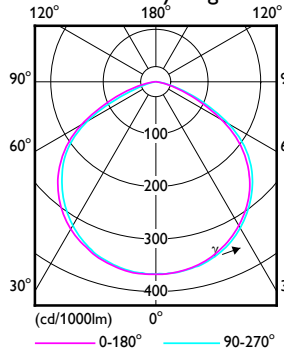



**BVP150 LED59 NW 70W SWB 1 x LED**

1 x 5790 lm

**Polar intensity diagram**

Light output ratio 1.00  
 Service upward 0.00  
 Service downward 1.00

CIE flux code 51 85 98 100 100

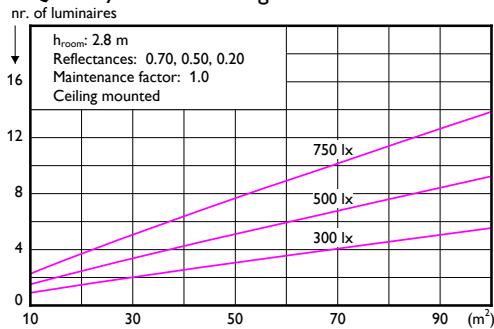**Quantity estimation diagram****Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.80	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.25	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.50	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
2.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
2.50	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
3.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
4.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
5.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00

Ceiling mounted

**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	80486	80799	81083	81336	82020	82655	83239
50.0	78202	78688	79182	79687	80585	81405	82149
55.0	74276	74760	75433	76295	77553	78614	79475
60.0	65591	66405	67374	68499	70145	71334	72066
65.0	52865	54395	56016	57727	58826	59662	60236
70.0	39338	41334	43079	44573	45000	45582	46318
75.0	26721	28509	29933	30992	31150	31645	32477
80.0	16496	18180	19273	19777	19699	20020	20740
85.0	10402	11509	12062	12062	11509	11405	11751
90.0	-	-	-	-	-	-	-

(cd/m²)

2018-10-25