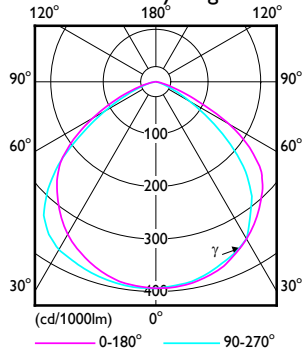



BVP150 LED8 CW 10W SWB 1 x LED

1 x 851 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.00
 Service downward 1.00

CIE flux code 55 90 99 100 100

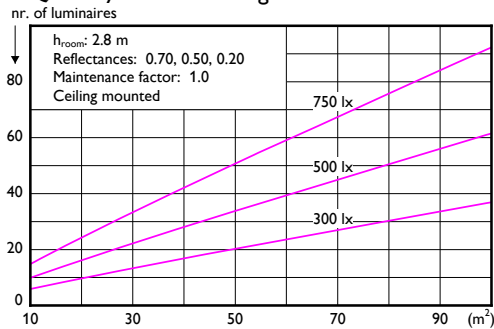Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.50	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.30	0.10	0.00	0.00
0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.60	0.52	0.49	0.51	0.50	0.49	0.42	0.41	0.37	0.41	0.37	0.35	0.35
0.80	0.64	0.60	0.63	0.61	0.59	0.52	0.52	0.47	0.51	0.47	0.45	0.45
1.00	0.73	0.68	0.72	0.70	0.67	0.61	0.60	0.55	0.59	0.55	0.53	0.53
1.25	0.82	0.75	0.81	0.77	0.75	0.69	0.68	0.63	0.67	0.63	0.61	0.61
1.50	0.89	0.81	0.87	0.83	0.80	0.74	0.73	0.69	0.72	0.69	0.66	0.66
2.00	0.98	0.88	0.96	0.91	0.87	0.82	0.81	0.78	0.80	0.77	0.75	0.75
2.50	1.04	0.92	1.02	0.96	0.91	0.87	0.86	0.83	0.85	0.82	0.80	0.80
3.00	1.09	0.95	1.06	1.00	0.94	0.91	0.89	0.87	0.88	0.86	0.83	0.83
4.00	1.14	0.98	1.10	1.03	0.97	0.95	0.93	0.91	0.91	0.90	0.87	0.87
5.00	1.17	1.00	1.13	1.06	0.99	0.97	0.95	0.93	0.94	0.92	0.89	0.89

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	83314	83235	82046	79748	75686	72472	70107
50.0	83433	83691	81274	76179	68931	63346	59425
55.0	77875	79405	75695	66746	55873	48452	44484
60.0	66544	64344	58540	49131	39978	33893	30875
65.0	43797	42225	38206	31739	25050	20753	18848
70.0	26281	23932	21315	18430	14661	12211	11082
75.0	14012	12815	11561	10248	8039	6621	5994
80.0	7343	6635	5885	5092	4078	3445	3194
85.0	4603	3851	3100	2348	1769	1472	1456
90.0	-	-	-	-	-	-	-

(cd/m²)

2018-10-25