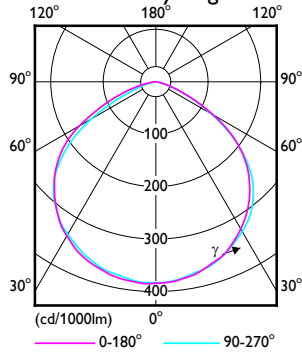



**BVP150 LED25 WW 30W SWB 1 x LED**

1 x 2477 lm

**Polar intensity diagram**

Light output ratio 1.00  
 Service upward 0.00  
 Service downward 1.00

CIE flux code 53 87 99 100 100

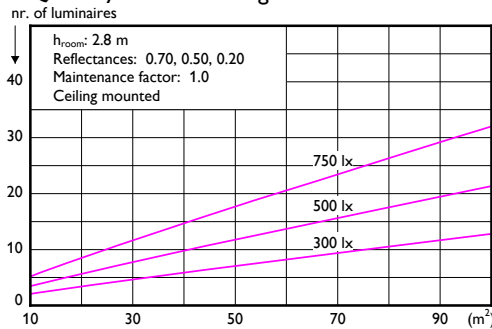**Quantity estimation diagram****Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	87624	87311	87689	88759	89838	90546	90881
50.0	83615	83726	84168	84943	84779	84755	84872
55.0	76373	76451	76685	77077	75215	74571	75146
60.0	62914	63831	64008	63444	60869	59529	59426
65.0	47063	48388	48720	48057	45086	43540	43417
70.0	31678	32715	32632	31427	29378	28546	28932
75.0	19566	20131	19814	18615	17292	16858	17313
80.0	11262	11251	10650	9459	8904	8848	9290
85.0	6446	5709	4655	3284	2855	2834	3223
90.0	-	-	-	-	-	-	-

(cd/m²)

2018-10-25