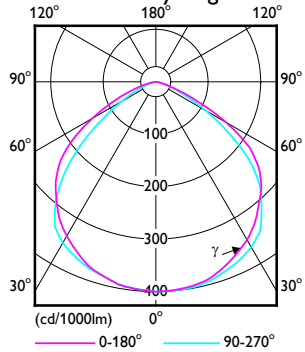



BVP150 LED8 WW 10W SWB 1 x LED

1 x 802 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.00
 Service downward 1.00

CIE flux code 55 90 99 100 100

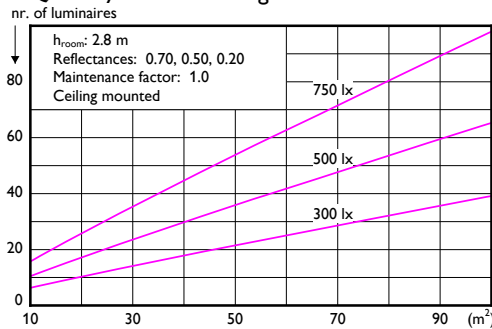Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.50	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.30	0.10	0.00	0.00
0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.60	0.52	0.49	0.51	0.50	0.49	0.42	0.41	0.37	0.41	0.37	0.35	0.35
0.80	0.64	0.60	0.63	0.61	0.59	0.52	0.52	0.47	0.51	0.47	0.45	0.45
1.00	0.73	0.68	0.72	0.70	0.67	0.61	0.60	0.55	0.59	0.55	0.53	0.53
1.25	0.82	0.75	0.81	0.77	0.75	0.69	0.68	0.63	0.67	0.63	0.61	0.61
1.50	0.89	0.81	0.87	0.83	0.80	0.74	0.73	0.69	0.72	0.69	0.66	0.66
2.00	0.98	0.88	0.96	0.91	0.87	0.82	0.81	0.78	0.80	0.77	0.75	0.75
2.50	1.04	0.92	1.02	0.96	0.91	0.87	0.86	0.83	0.85	0.82	0.80	0.80
3.00	1.09	0.95	1.06	1.00	0.94	0.91	0.89	0.87	0.88	0.86	0.83	0.83
4.00	1.14	0.98	1.10	1.03	0.97	0.95	0.93	0.91	0.91	0.90	0.87	0.87
5.00	1.17	1.00	1.13	1.06	0.99	0.97	0.95	0.93	0.94	0.92	0.89	0.89

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	77629	78374	79713	81644	79540	77876	76653
50.0	77050	79274	79946	79066	75229	72242	70104
55.0	73479	76707	76773	73677	66401	60759	56751
60.0	59914	64494	64487	59895	51080	45222	42321
65.0	39378	42524	42947	40647	33811	29439	27531
70.0	22138	24063	24856	24518	20488	17770	16364
75.0	12578	13592	14228	14486	12221	10631	9717
80.0	6964	7497	7830	7963	6764	5912	5409
85.0	4492	4876	4979	4802	4418	4072	3762
90.0	-	-	-	-	-	-	-

(cd/m²)

2018-10-25