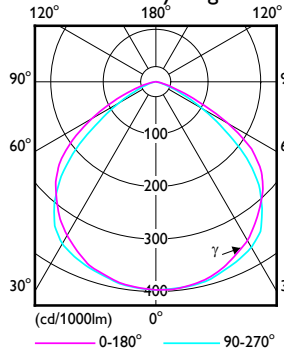



BVP150 LED8 NW 10W SWB 1 x LED

1 x 854 lm

Polar intensity diagram

Light output ratio 1.01
 Service upward 0.00
 Service downward 1.01

CIE flux code 55 90 99 100 101

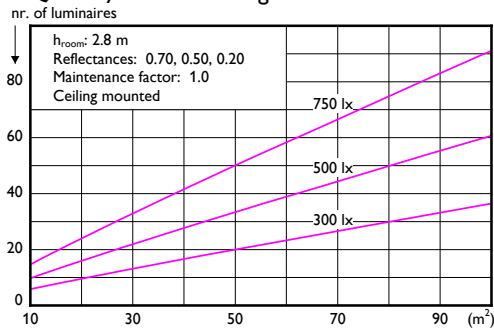Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.80	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.25	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.50	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
2.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
2.50	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
3.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
4.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
5.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	83873	85006	86400	88054	85160	82688	80640
50.0	83678	86191	86666	85103	79735	75502	72404
55.0	79749	83434	82862	78034	68619	61649	57124
60.0	65558	69152	67857	61671	52003	45510	42192
65.0	42991	45987	45477	41459	34118	29281	26947
70.0	24308	26140	26404	25099	20620	17540	15860
75.0	13695	14562	14811	14441	12036	10302	9240
80.0	7419	7748	7893	7855	6517	5562	4988
85.0	4729	4973	5080	5049	4181	3534	3107
90.0	-	-	-	-	-	-	-

(cd/m²)

2018-10-25