


**BVP150 LED8 2400K 10W SWB CQC 1 x LED**

1 x 718 lm


Polar intensity diagram

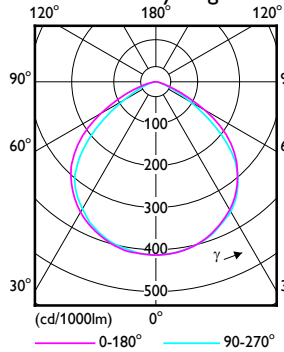

Light output ratio 1.00  
Service upward 0.00  
Service downward 1.00

CIE flux code 56 90 99 100 100

Quantity estimation diagram

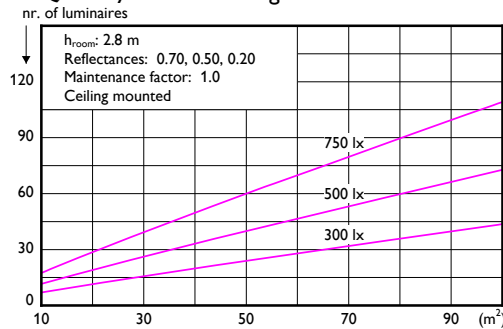

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.80	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.25	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
1.50	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
2.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
2.50	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
3.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
4.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
5.00	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	66438	67275	67517	67166	66567	65931	65257
50.0	63506	64259	64289	63594	60988	59051	57784
55.0	57941	59208	58658	56289	50852	47181	45275
60.0	46287	47539	46342	42697	37296	34059	32987
65.0	30626	31824	31182	28702	24654	22229	21429
70.0	18212	18976	18808	17708	15400	13997	13499
75.0	10836	11210	11185	10763	9434	8638	8376
80.0	6411	6583	6560	6341	5612	5172	5019
85.0	3248	3433	3545	3584	3122	2845	2753
90.0	-	-	-	-	-	-	-

(cd/m²)

2018-10-25