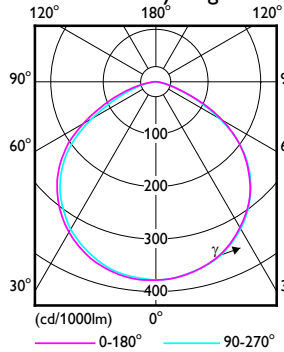



BVP150 LED59 2400K 70W SWB CQC 1 x LED

1 x 4229 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.00
 Service downward 1.00

CIE flux code 51 85 98 100 100

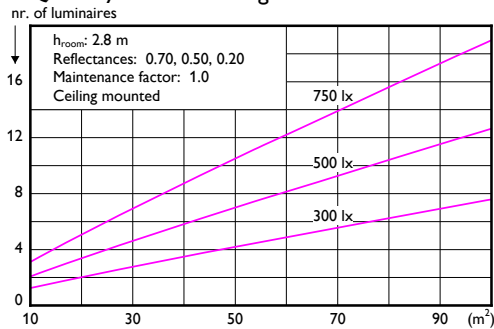Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.50	0.50	0.50	0.50	0.50	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	58784	58780	58776	58773	59017	59261	59506
50.0	57039	56873	56707	56541	56871	57202	57532
55.0	53782	53680	53579	53477	53651	53824	53998
60.0	48750	48225	47700	47175	46962	46750	46537
65.0	39148	38326	37504	36682	36659	36635	36612
70.0	27264	26793	26321	25850	26180	26510	26839
75.0	17820	17730	17641	17552	17796	18041	18286
80.0	11820	11925	12030	12134	12125	12115	12106
85.0	7749	8103	8457	8810	8880	8949	9019
90.0	-	-	-	-	-	-	-

(cd/m²)

2018-10-25