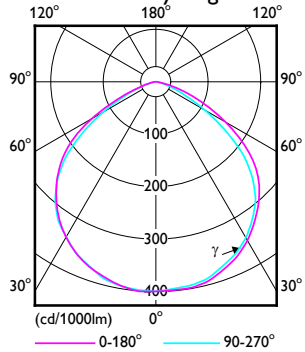



BVP150 LED17 2400K 20W SWB 1 x LED

1 x 1403 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.00
 Service downward 1.00

CIE flux code 54 89 99 100 100

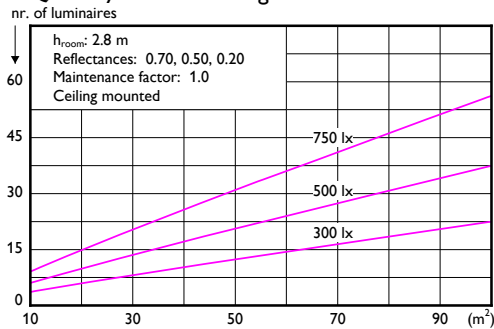Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	80957	81062	80527	79351	78031	76859	75835
50.0	78658	78313	77320	75681	73136	71200	69874
55.0	72960	72548	70753	67577	63262	60018	57844
60.0	62947	62178	59840	55933	50247	46230	43881
65.0	50871	50279	47686	43093	37140	32891	30345
70.0	37970	37674	35283	30796	25714	21972	19570
75.0	25869	25838	24127	20737	16548	13560	11773
80.0	15903	15903	14760	12474	9786	7891	6787
85.0	8834	8881	8442	7515	6133	5089	4382
90.0	-	-	-	-	-	-	-

(cd/m²)

2018-10-25