


BVP150 LED17 WW 20W SWB 1 x LED

1 x 1585 lm


Polar intensity diagram

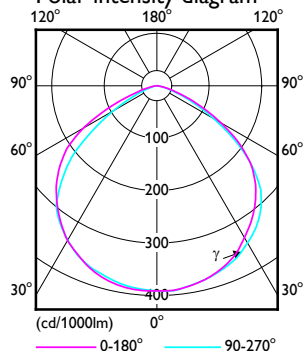

Light output ratio 1.00
 Service upward 0.00
 Service downward 1.00

CIE flux code 54 88 99 100 100

Quantity estimation diagram

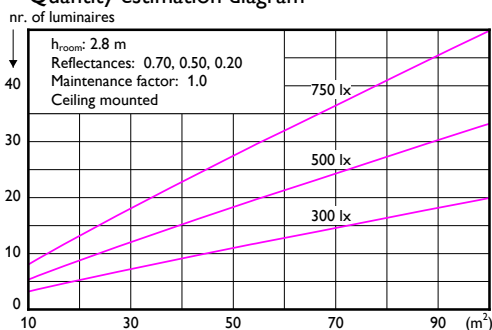

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	87360	87959	89074	90706	91602	92023	91969
50.0	84907	85915	87141	88584	87360	86399	85701
55.0	77792	79393	80252	80368	77402	75264	73954
60.0	65347	67859	68335	66776	61905	58930	57850
65.0	50374	53975	54216	51099	46342	43402	42279
70.0	34900	38680	39229	36548	32303	29495	28125
75.0	21984	24948	25796	24529	21381	19230	18077
80.0	11902	14093	15192	15201	13518	12334	11648
85.0	5616	7159	8508	9661	9342	9075	8863
90.0	-	-	-	-	-	-	-

(cd/m²)

2018-10-25