



BVP150 LED17 NW 20W SWB 1 x LED

1 x 1748 lm

Polar intensity diagram

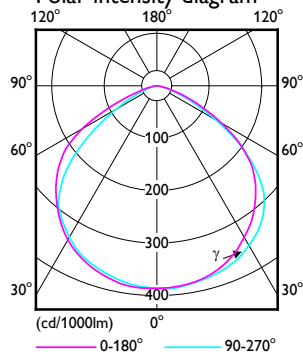

Quantity estimation diagram

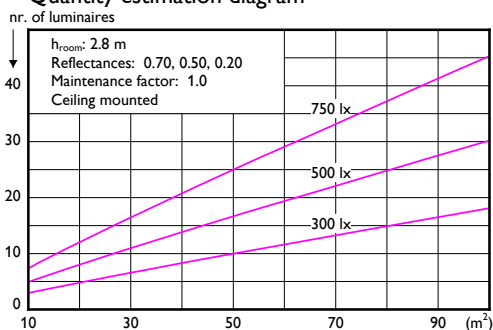

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80			0.70			0.50			0.30		
	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30	0.80	0.50	0.30
0.60	0.51	0.48	0.45	0.50	0.49	0.48	0.41	0.40	0.36	0.40	0.35	0.34
0.80	0.63	0.59	0.56	0.62	0.60	0.58	0.51	0.50	0.46	0.50	0.45	0.43
1.00	0.72	0.67	0.64	0.71	0.68	0.66	0.59	0.59	0.54	0.58	0.54	0.52
1.25	0.81	0.74	0.71	0.79	0.76	0.73	0.67	0.66	0.62	0.65	0.61	0.59
1.50	0.88	0.80	0.76	0.86	0.82	0.79	0.73	0.72	0.68	0.71	0.67	0.65
2.00	0.97	0.87	0.83	0.95	0.90	0.86	0.81	0.80	0.77	0.79	0.76	0.74
2.50	1.04	0.92	0.88	1.01	0.95	0.91	0.87	0.85	0.82	0.84	0.81	0.79
3.00	1.08	0.95	0.91	1.05	0.99	0.94	0.90	0.89	0.86	0.87	0.85	0.83
4.00	1.13	0.98	0.94	1.10	1.03	0.97	0.94	0.93	0.91	0.91	0.89	0.87
5.00	1.17	1.00	0.96	1.13	1.06	0.99	0.97	0.95	0.93	0.93	0.92	0.89

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	96252	98104	100256	102706	103845	104451	104526
50.0	93964	96501	98797	100853	99365	98241	97482
55.0	86625	89660	91354	91704	88211	85947	84912
60.0	73039	76954	77906	75893	70518	67208	65963
65.0	56244	61127	61750	58114	52417	48789	47231
70.0	39349	43767	44485	41503	36158	32610	30860
75.0	24591	27938	28804	27190	23105	20298	18769
80.0	13303	15571	16529	16175	13828	12188	11255
85.0	6369	7895	9011	9715	8932	8316	7866
90.0	-	-	-	-	-	-	-

(cd/m²)

2018-10-25