



1 x 9290022239 2000K 5.5W ST64

1 x 250 lm


Polar intensity diagram



Quantity estimation diagram

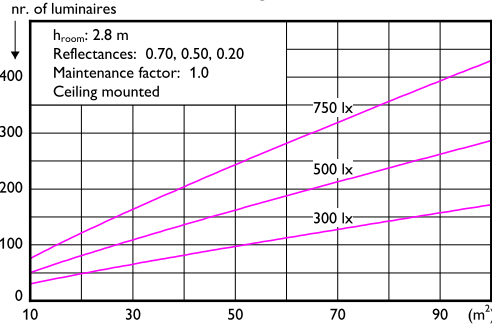

UGR diagram

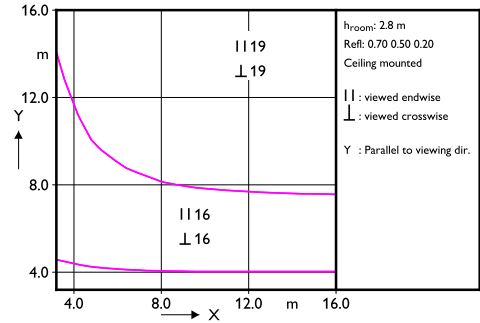

Light output ratio 1.00
Service upward 0.48
Service downward 0.52

CIE flux code 29 55 79 52 100

UGRcen (4Hx8H, 0.25H) 17

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	2504	2170	2002	1950	2002	2170	2504
50.0	2316	1992	1831	1782	1831	1992	2316
55.0	2245	1918	1758	1709	1758	1918	2245
60.0	2109	1790	1635	1588	1635	1790	2109
65.0	2004	1691	1539	1494	1539	1691	2004
70.0	1906	1598	1451	1407	1451	1598	1906
75.0	1818	1515	1371	1328	1371	1515	1818
80.0	1795	1486	1341	1298	1341	1486	1795
85.0	1940	1595	1435	1388	1435	1595	1940
90.0	1911	1560	1399	1351	1399	1560	1911

(cd/m²)

2019-06-04