


Ceiling Dip SW RD 22W 1 x 9290025623 4000K

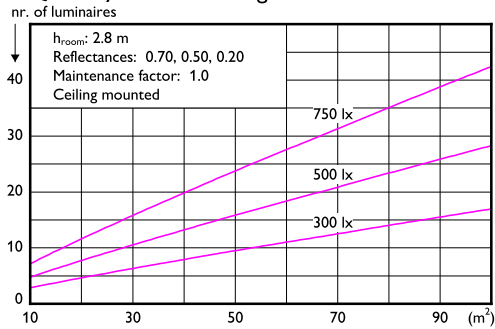
1 x 2100 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.13
 Service downward 0.87

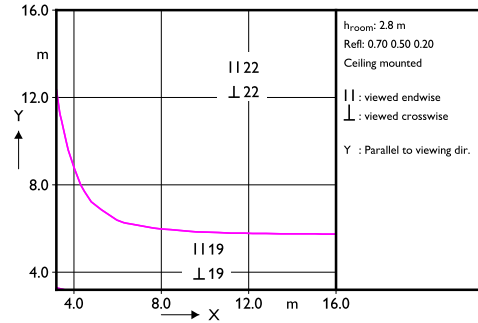
CIE flux code 43 73 91 87 100

UGRcen (4Hx8H, 0.25H) 21

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)													
	0.80 0.80		0.70 0.70 0.70 0.70				0.50 0.50		0.30 0.30		0.00			
	0.50 0.50		0.50 0.50		0.50 0.30		0.30 0.10		0.30 0.10		0.00			
	0.30 0.10		0.30 0.20		0.10 0.10		0.10 0.10		0.10 0.10		0.00			
0.60	0.44	0.42	0.43	0.42	0.41	0.34	0.33	0.28	0.31	0.27	0.24			
0.80	0.55	0.51	0.53	0.51	0.50	0.42	0.41	0.36	0.39	0.34	0.31			
1.00	0.63	0.59	0.61	0.59	0.57	0.49	0.47	0.42	0.45	0.41	0.37			
1.25	0.71	0.65	0.69	0.66	0.64	0.56	0.54	0.49	0.52	0.47	0.43			
1.50	0.78	0.70	0.75	0.71	0.68	0.62	0.59	0.54	0.56	0.52	0.48			
2.00	0.87	0.78	0.84	0.80	0.76	0.70	0.67	0.62	0.64	0.60	0.55			
2.50	0.94	0.83	0.90	0.85	0.81	0.75	0.72	0.68	0.69	0.65	0.60			
3.00	0.98	0.86	0.94	0.89	0.84	0.79	0.76	0.72	0.72	0.69	0.64			
4.00	1.05	0.90	1.00	0.94	0.88	0.84	0.80	0.77	0.77	0.74	0.69			
5.00	1.08	0.93	1.03	0.97	0.91	0.87	0.83	0.81	0.79	0.77	0.72			

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	3752	3752	3752	3752	3752	3752	3752
50.0	3634	3634	3634	3634	3634	3634	3634
55.0	3492	3492	3492	3492	3492	3492	3492
60.0	3336	3336	3336	3336	3336	3336	3336
65.0	3158	3158	3158	3158	3158	3158	3158
70.0	2960	2960	2960	2960	2960	2960	2960
75.0	2751	2751	2751	2751	2751	2751	2751
80.0	2563	2563	2563	2563	2563	2563	2563
85.0	2464	2464	2464	2464	2464	2464	2464
90.0	2667	2667	2667	2667	2667	2667	2667

(cd/m²)

2020-06-19