PHILIPS

CertaFlux

LED

CertaFlux DLM Slim 2000lm 6" G2

Datasheet

Plug and Play, easy to use downlight solution

CertaFlux DLM Slim 2000lm 6" G2

CertaFlux DLM Slim G2 downlight module provides plug & play downlight solution with affordable cost but no sacrifice on light quality. The module is integrated with optical and heatsink which help to make the product extremely easy to use. Optimized diffuser gives uniform light. The family is available from 600 lm - 2000lm with different cut out size in 4 CCTs. CertaFlux DLM Slim is fully compatible with Philips recommended driver.

Key features and benefits

Integration with optics and heatsink makes it easy to use
High efficacy, up to 134lm/W @ module level
Full portfolio from 600lm - 2000lm, available in 830/840/850/865 CCT with 4" 6" 8"
Optimized diffuser provides good uniformity
2 years warranty

June 2022



Ordering data

Commercial product name	EOC	12NC	EPREL registration #	Box quantity
CertaFlux DLM Slim 2000lm 830 6" G2	6922341 946035 00	9290 033 90980	840077	30
CertaFlux DLM Slim 2000lm 840 6" G2	6922341 946059 00	9290 033 91080	840078	30
CertaFlux DLM Slim 2000lm 850 6" G2	6922341 946073 00	9290 033 91180	840079	30
CertaFlux DLM Slim 2000lm 865 6" G2	6922341 946097 00	9290 033 91280	840080	30

Drive currents

Parameter	Nominal*	Life**	Max***	Unit
CertaFlux DLM Slim 2000lm 6" G2	500	See performance window	800	mA

Module temperatures

Parameter	Nominal*	Life**	Max***	Unit
T_c (case temperature at T_c point)	60	See performance window	90	°C

* Nominal value at which typical performance is specified

** Value at which life time is specified

*** Maximum value for safe operation, do not operate above this value

Optical characteristics - table per color (CCT)

CertaFlux DLM Slim 2000lm 830 6" G2

Parameter	Min	Typ	Max	Unit
Luminous flux	1863	2070		lm
Efficacy		125		lm/W
Correlated color temperature (CCT)		3000		K
Color coordinates (CIEx, CIEy)		(0.439, 0.403)		-
Color consistency			6	SDCM
CRI	80			
Photometric code		830/689		
Photobiological safety			RG1 unlimited	

Measurement precision ± 5% for the flux data and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5.

Operation point	830	lm	lm/W
80% I-nom 400mA	Tc 25 °C	1766	134
	Tc-nom 60 °C	1684	132
	Tc-max 90 °C	1604	128
I-nom 500mA	Tc 25 °C	2187	132
	Tc-nom 60 °C	2070	125
	Tc-max 90 °C	1964	124
I-max 800mA	Tc 25 °C	3370	124
	Tc-nom 60 °C	3165	120
	Tc-max 90 °C	2967	115

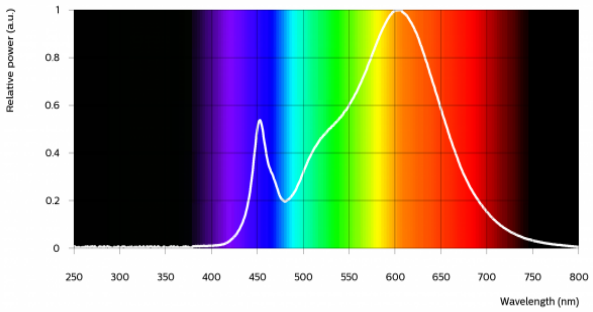

This product contains a light source of energy efficiency class E. EPREL model identifier: 929003390980LS. Registration number: 840077

CertaFlux DLM Slim 2000lm 840 6" G2

Parameter	Min	Typ	Max	Unit
Luminous flux	1926	2140		lm
Efficacy		130		lm/W
Correlated color temperature (CCT)		4000		K
Color coordinates (CIEx, CIEy)		(0.389, 0.385)		-
Color consistency			6	SDCM
CRI	80			
Photometric code		840/689		
Photobiological safety			RG1 unlimited	

Measurement precision ± 5% for the flux data and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5.

Operation point	840	lm	lm/W
80% I-nom 400mA	Tc 25 °C	1823	139
	Tc-nom 60 °C	1738	136
	Tc-max 90 °C	1656	132
I-nom 500mA	Tc 25 °C	2257	136
	Tc-nom 60 °C	2140	130
	Tc-max 90 °C	2027	128
I-max 800mA	Tc 25 °C	3479	128
	Tc-nom 60 °C	3268	124
	Tc-max 90 °C	3063	119

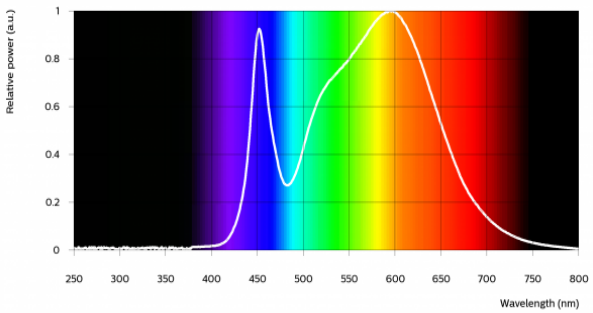

This product contains a light source of energy efficiency class E. EPREL model identifier: 929003391080LS. Registration number: 840078

CertaFlux DLM Slim 2000lm 850 6" G2

Parameter	Min	Typ	Max	Unit
Luminous flux	1926	2140		lm
Efficacy		130		lm/W
Correlated color temperature (CCT)		5000		K
Color coordinates (CIEx, CIEy)		(0.352, 0.361)		-
Color consistency			6	SDCM
CRI	80			
Photometric code		850/689		
Photobiological safety			RG1 unlimited	

Measurement precision ± 5% for the flux data and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5.

Operation point	850	lm	lm/W
80% I-nom 400mA	Tc 25 °C	1823	139
	Tc-nom 60 °C	1738	136
	Tc-max 90 °C	1656	132
I-nom 500mA	Tc 25 °C	2257	136
	Tc-nom 60 °C	2140	130
	Tc-max 90 °C	2027	128
I-max 800mA	Tc 25 °C	3479	128
	Tc-nom 60 °C	3268	124
	Tc-max 90 °C	3063	119

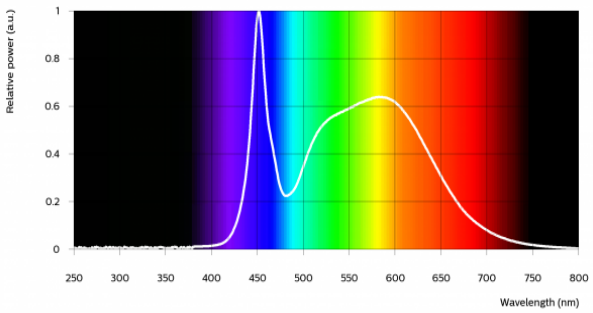

This product contains a light source of energy efficiency class E. EPREL model identifier: 929003391180LS. Registration number: 840079

CertaFlux DLM Slim 2000lm 865 6" G2

Parameter	Min	Typ	Max	Unit
Luminous flux	1926	2140		lm
Efficacy		130		lm/W
Correlated color temperature (CCT)		6500		K
Color coordinates (CIEx, CIEy)		(0.320, 0.338)		-
Color consistency			6	SDCM
CRI	80			
Photometric code		865/689		
Photobiological safety			RG1 unlimited	

Measurement precision ± 5% for the flux data and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5.

Operation point	865	lm	lm/W
80% I-nom 400mA	Tc 25 °C	1823	139
	Tc-nom 60 °C	1738	136
	Tc-max 90 °C	1656	132
I-nom 500mA	Tc 25 °C	2257	136
	Tc-nom 60 °C	2140	130
	Tc-max 90 °C	2027	128
I-max 800mA	Tc 25 °C	3479	128
	Tc-nom 60 °C	3268	124
	Tc-max 90 °C	3063	119

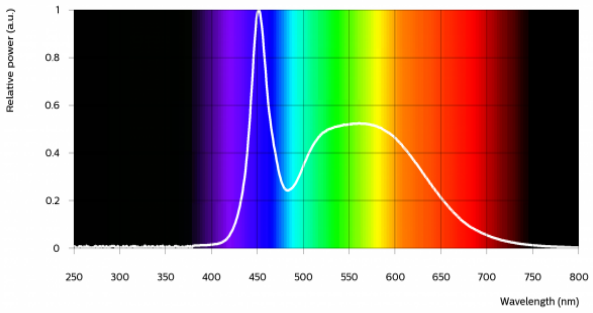

This product contains a light source of energy efficiency class E. EPREL model identifier: 929003391280LS. Registration number: 840080

Beam shape

CertaFlux DLM Slim 2000lm 6" G2

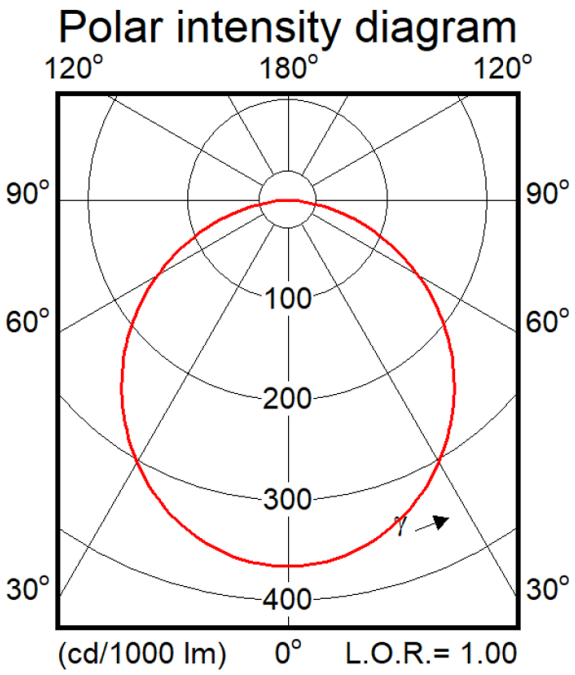

Electrical characteristics

Parameter	Min	Typ	Max	Unit
Forward voltage	31.0	33.0	36.0	V
Power consumption	15.5	16.5	18.0	W = kWh/1000h
Number of modules in series per chain			1	
Number of modules in parallel			1	

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%

Tuning information

Flux and efficacy versus current (at Tc nominal)

I [mA]	Flux [%]	Efficacy [%]
800	153	93
625	123	97
500	100	100
400	81	102
250	52	106

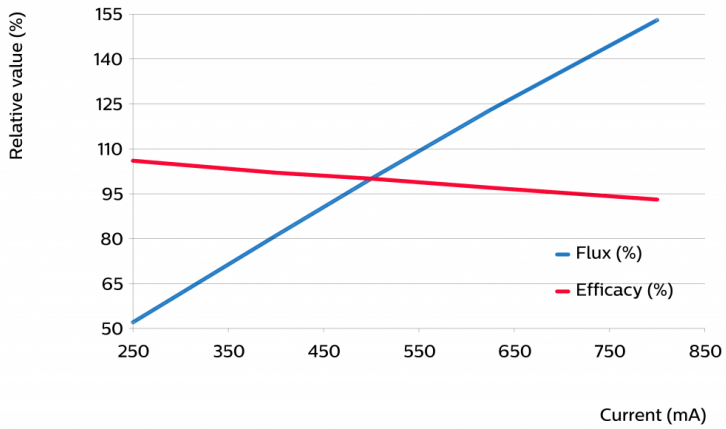

Flux and efficacy versus temperature at Tc (at I nominal)

Tc [°C]	Flux [%]	Efficacy [%]
90	95	97
80	97	98
60	100	100
25	105	103

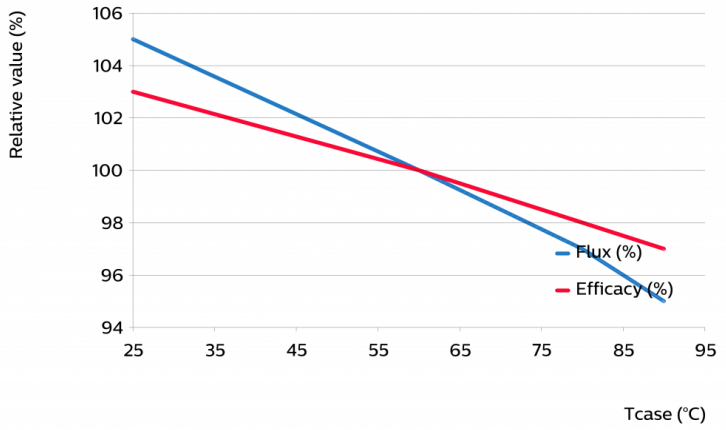

Lumen maintenance

Operation point	Lumen maintenance x 1000 hours	L70			L80			L90		
		B50	B20	B10	B50	B20	B10	B50	B20	B10
80% I nom 400mA	Tc nom 60°C	>30	>30	>30	>30	>30	>30	>30	>30	28
	Tc 75°C	>30	>30	>30	>30	>30	>30	>30	26	24
	Tc max 90°C	>30	>30	>30	>30	>30	>30	27	23	21
I nom 500mA	Tc nom 60°C	>30	>30	>30	>30	>30	>30	>30	29	27
	Tc 75°C	>30	>30	>30	>30	>30	>30	30	25	23
	Tc max 90°C	>30	>30	>30	>30	>30	>30	26	22	20
I max 800mA	Tc nom 60°C	>30	>30	>30	>30	>30	>30	30	25	23
	Tc 75°C	>30	>30	>30	>30	>30	>30	26	22	20
	Tc max 90°C	>30	>30	>30	>30	>30	>30	23	19	17

Lifetime

Parameter	Value	Unit
C10 at Tc life	>30000	hours
M70F50 nominal	>30000	hours

Performance Window

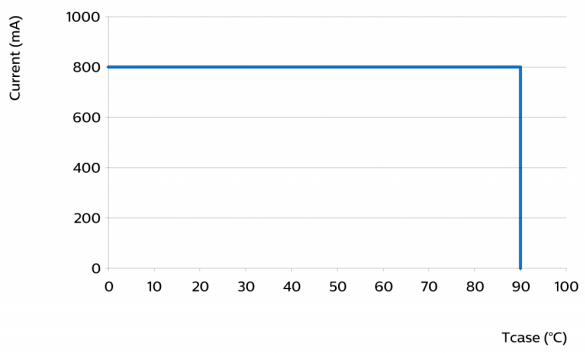

Wiring

Specification item	Value	Unit	Condition
Input wire cross-section	0.75...0.75	mm^2	solid, fused, stranded
	18...18	AWG	solid, fused, stranded
Input wire strip length	8...10	mm	

Stranded, Brown=Positive Blue=Negative

Mechanical characteristics

Parameter	Min	Typ	Max	Unit
Length	168	170	172	mm
Width	168	170	172	mm
Height	35	36	37	mm
Product mass		150		gram

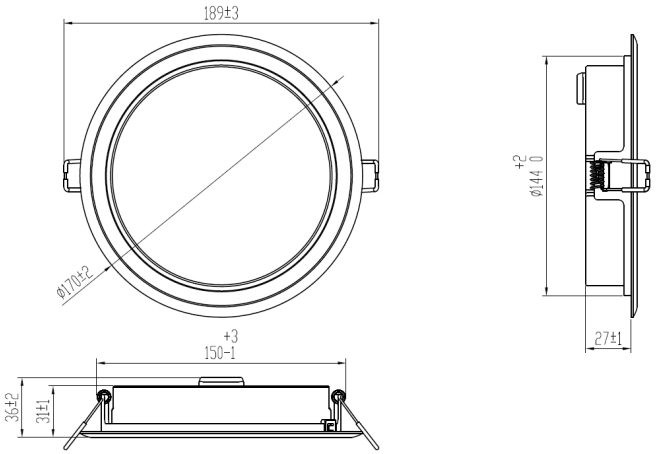

Absolute ratings

Parameter	Min	Max	Unit
Current through the LED module (I-max)		800	mA
Case temperature (Tc-max)		90	℃
ESD (direct contact)	8		kV
Working voltage		60	V_{dc}
Ambient temperature	-20	35	℃
Storage temperature	-40	65	℃

Application information

Certificates and Standards
CB
CCC
CE
GB 24819
IEC/TR 62778
IEC/EN 62031
UKCA

Environmental
RoHS/REACH

Application	
IP rating	No IP rating
Overheating protection	No protection
Luminaire class	SELV input only
Dimming	Yes

© 2022 Signify Holding, IBRS 10461, 5600VB, NL. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.
UK importer address: Signify Commercial UK Limited, 3 Guildford Business Park, GU2 8XG

22/06/2022

www.philips.com/oem