








## **Recessed Mounted**

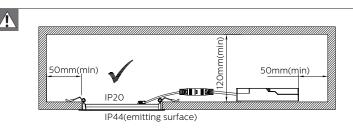













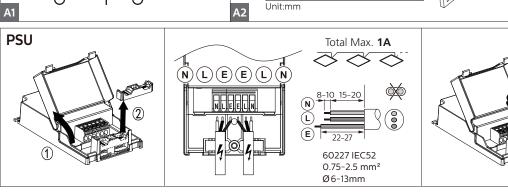



Data subject to change without notice Keep for future reference: www.philips.com/lighting








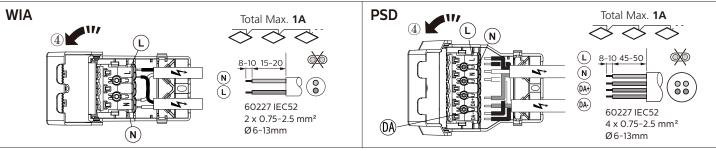

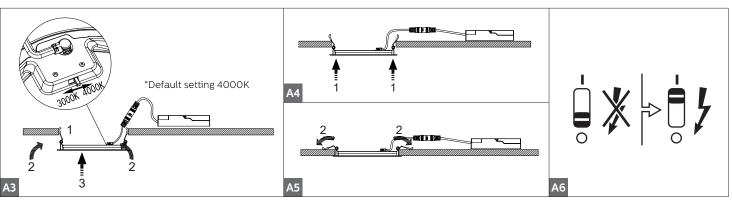

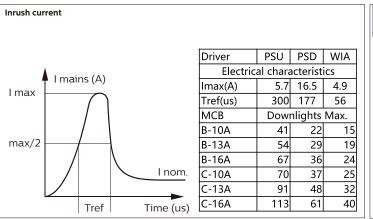







- DN145B version is IP20 & as such is not protected against water ingress & as such we strongly recommend that the environment in which the luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress,
- Philips / Signify cannot guarantee safe failure & product warranty will become void
- $. \label{thm:constraint} The luminaire shall not be covered with thermal insulation or similar material under any circumstance.$ Luminaire must not be used or stored in corrosive environment where hazardous materials
- such as Sulphur, Chlorine, phthalates, etc, are present. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively
- replaced by the manufacturer or his service agent or a similar qualified person in order
- Between LV and control circuit is basic insulation.

## Installation of Emergency unit Installation of Emergency Lighting Kit (Not included, order separately) This product is only compatible with: 912401483602 EM300V ELB ELP3 kit LV 3.6V 4900mAh LB Maintained Emergency 220-240Vac Maintained Emergency ATS Type S 220-240Vac Labels X 1 AD 180 X 1 ADF 180 **PHILIPS** Rechargeable Lithium ion Bottery Pack 11NR22/72 4.9Ah 3.6V 17.64Wh Battery Part No.: 0101A000071T Date of Installation: OR Non-Maintained Emergency ATS Type S 220-240Vac Non-Maintained Emergency 220-240Vac X 0 AD 180 X 0 ADF 180

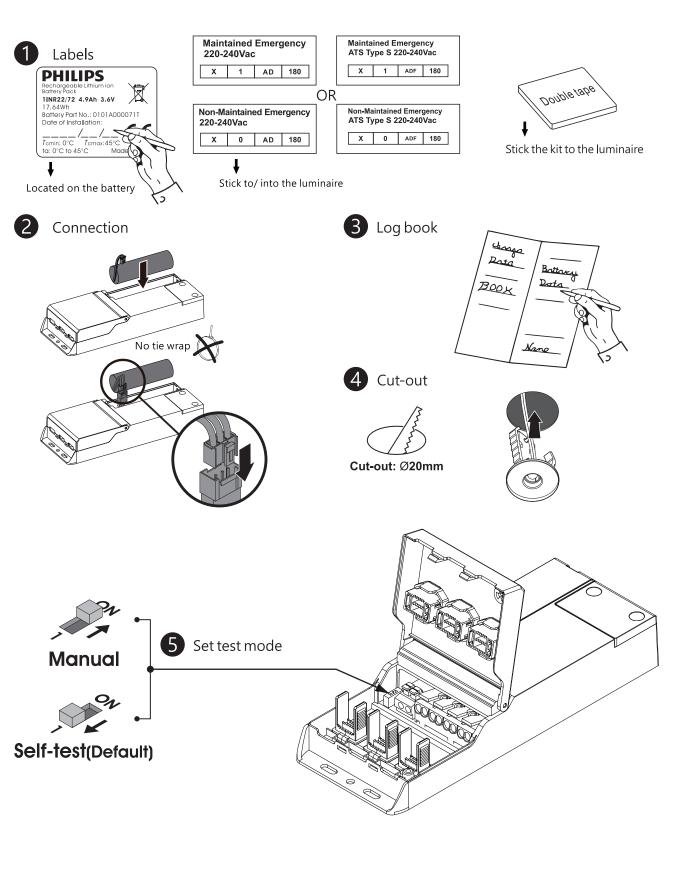

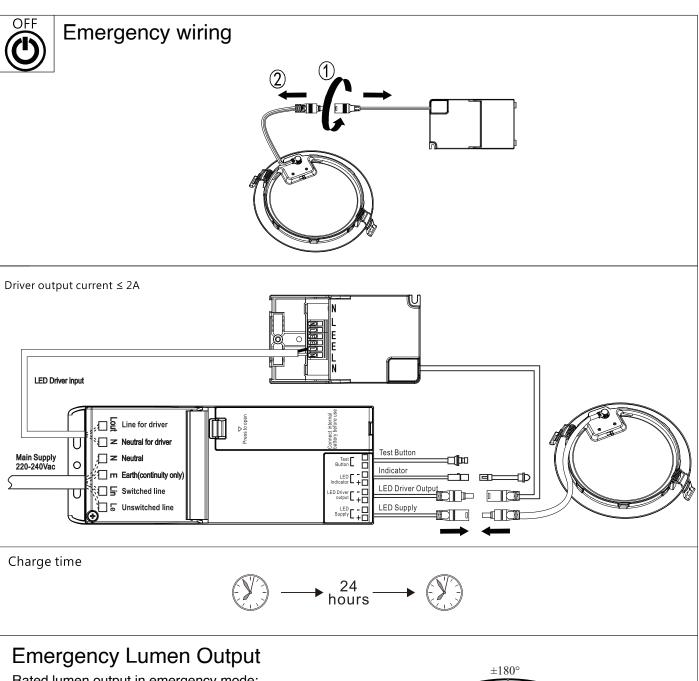

Rated lumen output in emergency mode: DN145B LED6S/830\_840 WH: min 270lm DN145B LED10S/830\_840 WH: min 280lm DN145B LED20S/830\_840 WH: min 290lm

