
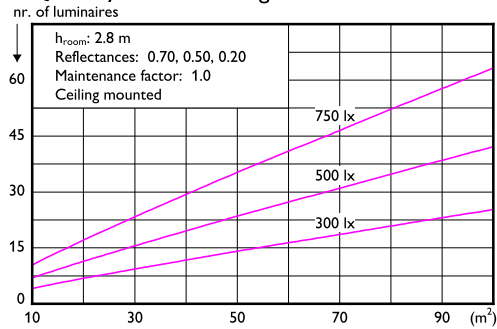
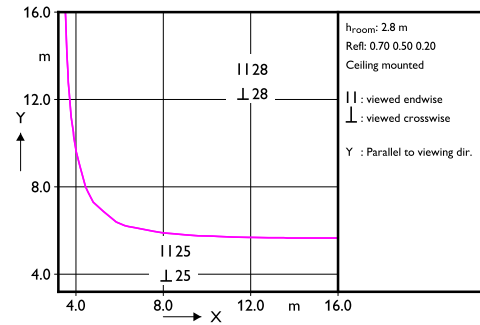


Downlight 1 x 9290046538 4000K

1 x 1300 lm

Polar intensity diagram**Quantity estimation diagram****UGR diagram**

Light output ratio 1.00
 Service upward 0.00
 Service downward 1.00

CIE flux code 48 79 96 100 100

UGRcen (4Hx8H, 0.25H) 26

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.77	0.71	0.75	0.72	0.70	0.63	0.62	0.57	0.61	0.57	0.54	0.54
1.50	0.84	0.76	0.82	0.78	0.75	0.68	0.67	0.63	0.66	0.62	0.60	0.60
2.00	0.93	0.83	0.91	0.87	0.82	0.77	0.76	0.72	0.74	0.71	0.69	0.69
2.50	1.00	0.88	0.97	0.92	0.87	0.83	0.81	0.78	0.80	0.77	0.74	0.74
3.00	1.05	0.92	1.02	0.96	0.91	0.87	0.85	0.82	0.84	0.81	0.78	0.78
4.00	1.11	0.96	1.07	1.01	0.95	0.92	0.90	0.87	0.88	0.86	0.83	0.83
5.00	1.15	0.98	1.11	1.04	0.97	0.95	0.93	0.91	0.91	0.89	0.87	0.87

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	17838	17838	17838	17838	17838	17838	17838
50.0	17410	17410	17410	17410	17410	17410	17410
55.0	16829	16829	16829	16829	16829	16829	16829
60.0	16069	16069	16069	16069	16069	16069	16069
65.0	15164	15164	15164	15164	15164	15164	15164
70.0	14219	14219	14219	14219	14219	14219	14219
75.0	13543	13543	13543	13543	13543	13543	13543
80.0	12433	12433	12433	12433	12433	12433	12433
85.0	9236	9236	9236	9236	9236	9236	9236
90.0	3976	3976	3976	3976	3976	3976	3976

(cd/m²)

2024-11-11