
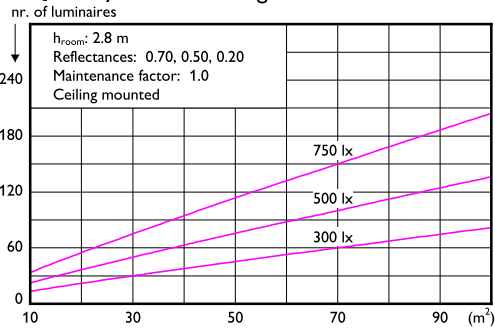
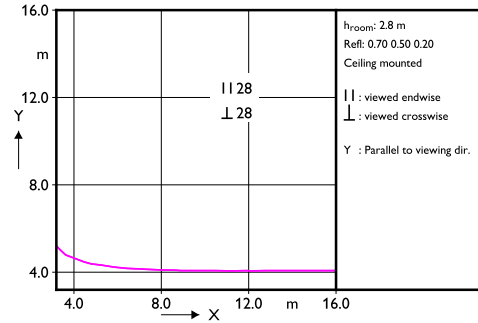


Downlight 1 x 9290046532 4000K

1 x 400 lm

Polar intensity diagram**Quantity estimation diagram****UGR diagram**

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 49 81 96 100 100

UGRcen (4Hx8H, 0.25H) 27

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.00	0.60	0.47	0.48	0.47	0.46	0.39	0.38	0.34	0.38	0.34	0.32	0.32
1.25	0.69	0.56	0.59	0.57	0.56	0.48	0.48	0.43	0.47	0.43	0.40	0.40
1.50	0.78	0.64	0.68	0.65	0.63	0.56	0.55	0.50	0.55	0.50	0.48	0.48
2.00	0.84	0.76	0.82	0.79	0.76	0.69	0.68	0.64	0.67	0.63	0.61	0.61
2.50	0.94	0.84	0.92	0.87	0.83	0.78	0.76	0.73	0.75	0.72	0.69	0.69
3.00	1.01	0.89	0.98	0.93	0.88	0.83	0.82	0.78	0.80	0.77	0.75	0.75
4.00	1.05	0.92	1.02	0.96	0.91	0.87	0.86	0.82	0.84	0.81	0.79	0.79
5.00	1.11	0.96	1.08	1.01	0.95	0.92	0.90	0.88	0.88	0.86	0.84	0.84
	1.15	0.98	1.11	1.04	0.97	0.95	0.93	0.91	0.91	0.89	0.87	0.87

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	27420	27420	27420	27420	27420	27420	27420
50.0	26708	26708	26708	26708	26708	26708	26708
55.0	25183	25183	25183	25183	25183	25183	25183
60.0	23092	23092	23092	23092	23092	23092	23092
65.0	21709	21709	21709	21709	21709	21709	21709
70.0	20518	20518	20518	20518	20518	20518	20518
75.0	18711	18711	18711	18711	18711	18711	18711
80.0	15173	15173	15173	15173	15173	15173	15173
85.0	5456	5456	5456	5456	5456	5456	5456
90.0	2762	2762	2762	2762	2762	2762	2762

(cd/m²)

2024-11-11