



Downlight 1 x 9290046554 6500K
1 x 2000 lm

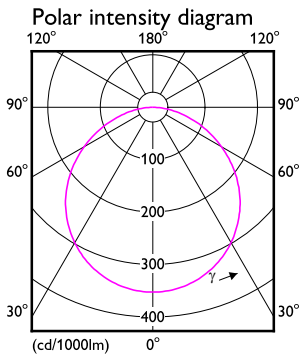

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 47 79 96 100 100


UGRcen (4Hx8H, 0.25H) 25

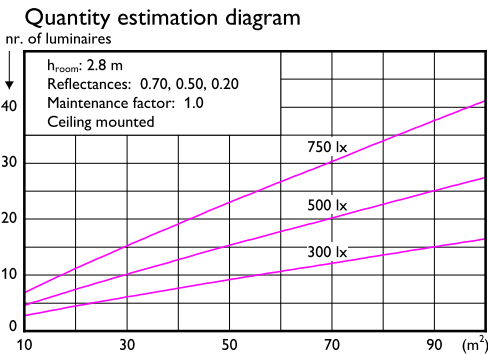

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.48	0.46	0.47	0.46	0.45	0.38	0.37	0.32	0.37	0.32	0.30	0.30
0.80	0.59	0.55	0.58	0.56	0.55	0.47	0.46	0.41	0.46	0.41	0.39	0.39
1.00	0.68	0.63	0.66	0.64	0.62	0.55	0.54	0.49	0.53	0.49	0.46	0.46
1.25	0.77	0.70	0.75	0.72	0.69	0.62	0.61	0.56	0.60	0.56	0.54	0.54
1.50	0.83	0.75	0.81	0.78	0.74	0.68	0.67	0.62	0.66	0.62	0.59	0.59
2.00	0.93	0.83	0.91	0.86	0.82	0.77	0.75	0.71	0.74	0.71	0.68	0.68
2.50	1.00	0.88	0.97	0.92	0.87	0.82	0.81	0.77	0.80	0.76	0.74	0.74
3.00	1.05	0.92	1.02	0.96	0.90	0.86	0.85	0.82	0.83	0.81	0.78	0.78
4.00	1.11	0.96	1.07	1.01	0.95	0.91	0.90	0.87	0.88	0.86	0.83	0.83
5.00	1.14	0.98	1.11	1.04	0.97	0.94	0.93	0.90	0.91	0.89	0.86	0.86

Ceiling mounted

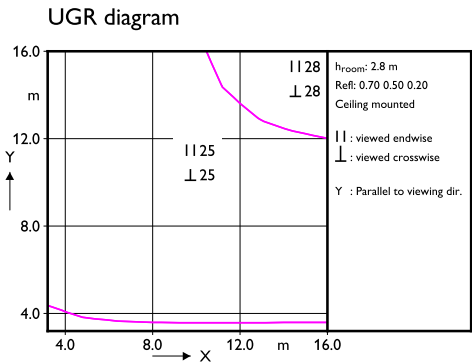

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0							
50.0							
55.0							
60.0							
65.0							
70.0							
75.0							
80.0							
85.0							
90.0							

Cannot draw luminance table:
the apparent area equals zero.

(cd/m²)