
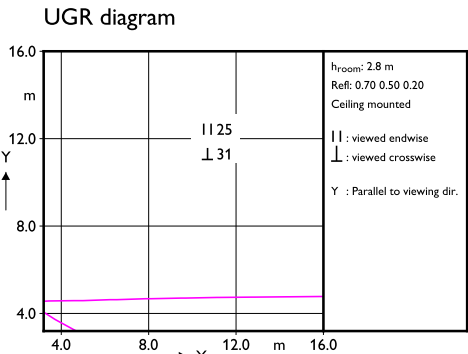
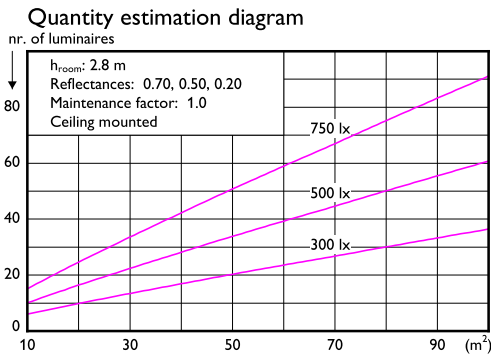


Downlight 1 x 9290046555 6500K
1 x 900 lm

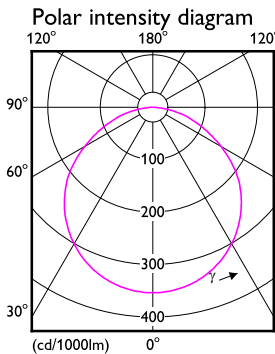

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 48 80 96 100 100

UGRcen (4Hx8H, 0.25H) 30

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80				0.70				0.50			
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.49	0.46	0.48	0.47	0.46	0.38	0.38	0.33	0.37	0.33	0.31	0.31
0.80	0.60	0.56	0.58	0.57	0.55	0.48	0.47	0.42	0.46	0.42	0.40	0.40
1.00	0.69	0.64	0.67	0.65	0.63	0.56	0.55	0.50	0.54	0.49	0.47	0.47
1.25	0.77	0.71	0.75	0.73	0.70	0.63	0.62	0.57	0.61	0.57	0.54	0.54
1.50	0.84	0.76	0.82	0.78	0.75	0.69	0.68	0.63	0.66	0.62	0.60	0.60
2.00	0.94	0.84	0.91	0.87	0.83	0.77	0.76	0.72	0.75	0.71	0.69	0.69
2.50	1.00	0.89	0.97	0.92	0.87	0.83	0.81	0.78	0.80	0.77	0.74	0.74
3.00	1.05	0.92	1.02	0.96	0.91	0.87	0.85	0.82	0.84	0.81	0.79	0.79
4.00	1.11	0.96	1.07	1.01	0.95	0.92	0.90	0.87	0.88	0.86	0.83	0.83
5.00	1.15	0.98	1.11	1.04	0.97	0.94	0.93	0.91	0.91	0.89	0.86	0.86

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0							
50.0							
55.0							
60.0							
65.0							
70.0							
75.0							
80.0							
85.0							
90.0							

Cannot draw luminance table:
the apparent area equals zero.

(cd/m²)