


Downlight 1 x 9290026746 4000K

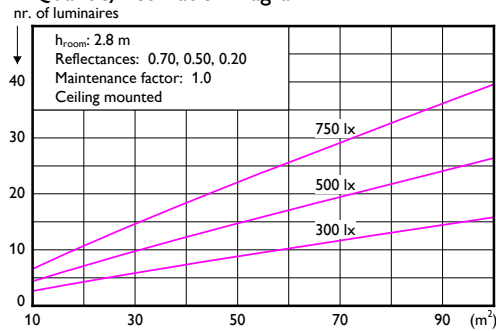
1 x 2100 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.01
 Service downward 0.99

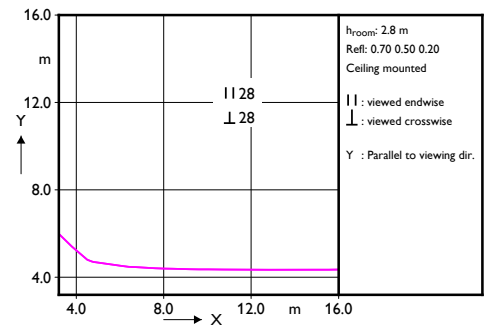
CIE flux code 47 78 95 99 100

UGRcen (4Hx8H, 0.25H) 27

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.48	0.46	0.47	0.46	0.45	0.38	0.37	0.32	0.37	0.32	0.30	0.30
0.80	0.59	0.55	0.58	0.56	0.54	0.47	0.46	0.41	0.45	0.41	0.39	0.39
1.00	0.68	0.63	0.66	0.64	0.62	0.54	0.54	0.48	0.53	0.48	0.46	0.46
1.25	0.76	0.70	0.74	0.71	0.69	0.62	0.61	0.56	0.60	0.55	0.53	0.53
1.50	0.83	0.75	0.81	0.77	0.74	0.67	0.66	0.62	0.65	0.61	0.58	0.58
2.00	0.93	0.83	0.90	0.86	0.81	0.76	0.75	0.70	0.73	0.70	0.67	0.67
2.50	0.99	0.88	0.96	0.91	0.86	0.82	0.80	0.76	0.78	0.75	0.73	0.73
3.00	1.04	0.91	1.01	0.95	0.90	0.86	0.84	0.81	0.82	0.79	0.77	0.77
4.00	1.10	0.95	1.06	1.00	0.94	0.90	0.89	0.86	0.87	0.85	0.82	0.82
5.00	1.14	0.98	1.10	1.03	0.96	0.94	0.92	0.89	0.90	0.88	0.85	0.85

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	22781	22781	22781	22781	22781	22781	22781
50.0	22370	22370	22370	22370	22370	22370	22370
55.0	21857	21857	21857	21857	21857	21857	21857
60.0	21205	21205	21205	21205	21205	21205	21205
65.0	20159	20159	20159	20159	20159	20159	20159
70.0	19151	19151	19151	19151	19151	19151	19151
75.0	18048	18048	18048	18048	18048	18048	18048
80.0	16362	16362	16362	16362	16362	16362	16362
85.0	13748	13748	13748	13748	13748	13748	13748
90.0	41999	41999	41999	41999	41999	41999	41999

(cd/m²)

2022-04-04