


Downlight 1 x 9290026722 4000K

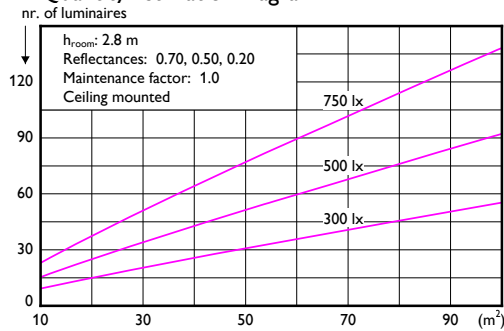
1 x 600 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.01
 Service downward 0.99

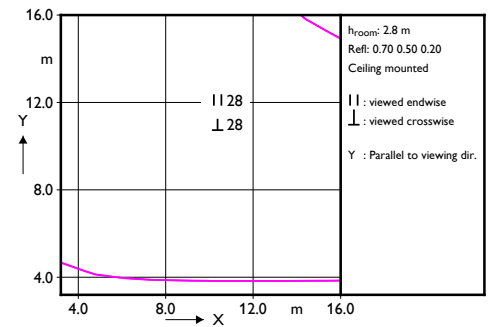
CIE flux code 47 79 95 99 100

UGRcen (4Hx8H, 0.25H) 28

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.48	0.46	0.47	0.46	0.45	0.38	0.37	0.32	0.36	0.32	0.30	0.30
0.80	0.59	0.55	0.58	0.56	0.54	0.47	0.46	0.41	0.45	0.41	0.39	0.39
1.00	0.68	0.63	0.66	0.64	0.62	0.55	0.54	0.49	0.53	0.48	0.46	0.46
1.25	0.76	0.70	0.74	0.72	0.69	0.62	0.61	0.56	0.60	0.56	0.53	0.53
1.50	0.83	0.75	0.81	0.77	0.74	0.68	0.66	0.62	0.65	0.61	0.59	0.59
2.00	0.93	0.83	0.90	0.86	0.82	0.76	0.75	0.71	0.73	0.70	0.67	0.67
2.50	0.99	0.88	0.96	0.91	0.86	0.82	0.80	0.77	0.79	0.75	0.73	0.73
3.00	1.04	0.91	1.01	0.95	0.90	0.86	0.84	0.81	0.82	0.80	0.77	0.77
4.00	1.10	0.95	1.06	1.00	0.94	0.90	0.89	0.86	0.87	0.85	0.82	0.82
5.00	1.14	0.98	1.10	1.03	0.96	0.93	0.91	0.89	0.90	0.88	0.85	0.85

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	27258	27258	27258	27258	27258	27258	27258
50.0	26689	26689	26689	26689	26689	26689	26689
55.0	25967	25967	25967	25967	25967	25967	25967
60.0	25060	25060	25060	25060	25060	25060	25060
65.0	23930	23930	23930	23930	23930	23930	23930
70.0	22538	22538	22538	22538	22538	22538	22538
75.0	21020	21020	21020	21020	21020	21020	21020
80.0	17723	17723	17723	17723	17723	17723	17723
85.0	13731	13731	13731	13731	13731	13731	13731
90.0	15857	15857	15857	15857	15857	15857	15857

(cd/m²)

2022-04-04