


Downlight 1 x 9290026721 3000K

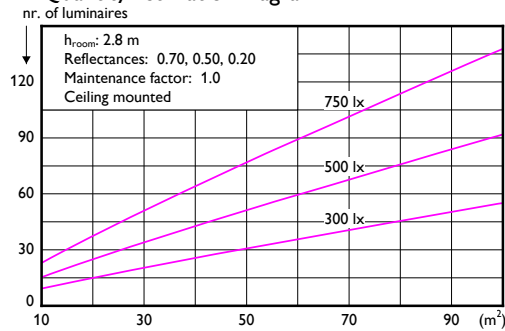
1 x 600 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.01
 Service downward 0.99

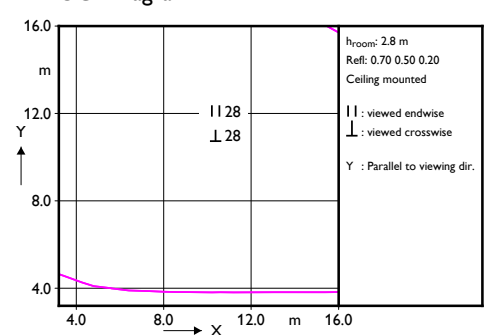
CIE flux code 47 79 96 99 100

UGRcen (4Hx8H, 0.25H) 28

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.48	0.46	0.47	0.46	0.45	0.38	0.37	0.32	0.37	0.32	0.30	0.30
0.80	0.59	0.55	0.58	0.56	0.54	0.47	0.46	0.41	0.45	0.41	0.39	0.39
1.00	0.68	0.63	0.66	0.64	0.62	0.55	0.54	0.49	0.53	0.48	0.46	0.46
1.25	0.76	0.70	0.75	0.72	0.69	0.62	0.61	0.56	0.60	0.56	0.53	0.53
1.50	0.83	0.75	0.81	0.77	0.74	0.68	0.67	0.62	0.65	0.61	0.59	0.59
2.00	0.93	0.83	0.90	0.86	0.82	0.76	0.75	0.71	0.74	0.70	0.68	0.68
2.50	1.00	0.88	0.97	0.92	0.87	0.82	0.81	0.77	0.79	0.76	0.73	0.73
3.00	1.04	0.91	1.01	0.95	0.90	0.86	0.84	0.81	0.83	0.80	0.77	0.77
4.00	1.10	0.96	1.07	1.00	0.94	0.91	0.89	0.87	0.87	0.85	0.82	0.82
5.00	1.14	0.98	1.10	1.03	0.97	0.94	0.92	0.90	0.90	0.88	0.85	0.85

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	27301	27301	27301	27301	27301	27301	27301
50.0	26758	26758	26758	26758	26758	26758	26758
55.0	26046	26046	26046	26046	26046	26046	26046
60.0	25196	25196	25196	25196	25196	25196	25196
65.0	24157	24157	24157	24157	24157	24157	24157
70.0	22490	22490	22490	22490	22490	22490	22490
75.0	20517	20517	20517	20517	20517	20517	20517
80.0	17613	17613	17613	17613	17613	17613	17613
85.0	13730	13730	13730	13730	13730	13730	13730
90.0	4391	4391	4391	4391	4391	4391	4391

(cd/m²)

2022-04-04