


DN200 G3 LED6 1 x 9290032701 3000K

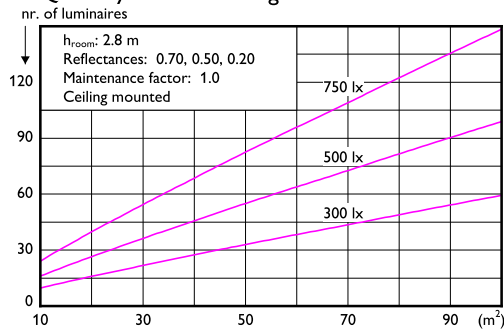
1 x 550 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.00
 Service downward 1.00

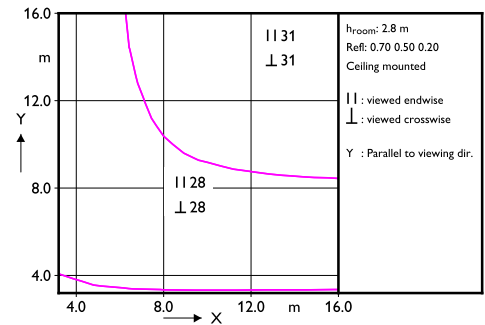
CIE flux code 50 80 96 100 100

UGRcen (4Hx8H, 0.25H) 28

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.50	0.48	0.60	0.58	0.56	0.49	0.48	0.44	0.48	0.43	0.41
0.80	0.50	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.30	0.30	0.10	0.00
1.00	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.00
1.25	0.78	0.71	0.76	0.73	0.71	0.64	0.63	0.58	0.62	0.58	0.56	0.56
1.50	0.84	0.77	0.82	0.79	0.76	0.69	0.68	0.64	0.67	0.63	0.61	0.61
2.00	0.94	0.84	0.92	0.87	0.83	0.78	0.77	0.73	0.75	0.72	0.69	0.69
2.50	1.01	0.89	0.98	0.93	0.88	0.83	0.82	0.78	0.80	0.78	0.75	0.75
3.00	1.05	0.92	1.02	0.96	0.91	0.87	0.86	0.83	0.84	0.82	0.79	0.79
4.00	1.11	0.96	1.08	1.01	0.95	0.92	0.90	0.88	0.89	0.87	0.84	0.84
5.00	1.15	0.99	1.11	1.04	0.98	0.95	0.93	0.91	0.91	0.90	0.87	0.87

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	34579	34579	34579	34579	34579	34579	34579
50.0	33169	33169	33169	33169	33169	33169	33169
55.0	31725	31725	31725	31725	31725	31725	31725
60.0	30244	30244	30244	30244	30244	30244	30244
65.0	28695	28695	28695	28695	28695	28695	28695
70.0	27040	27040	27040	27040	27040	27040	27040
75.0	25137	25137	25137	25137	25137	25137	25137
80.0	22755	22755	22755	22755	22755	22755	22755
85.0	18821	18821	18821	18821	18821	18821	18821
90.0	9608	9608	9608	9608	9608	9608	9608

(cd/m²)

2023-01-05