


DN200 G3 LED6 1 x 9290032708 4000K

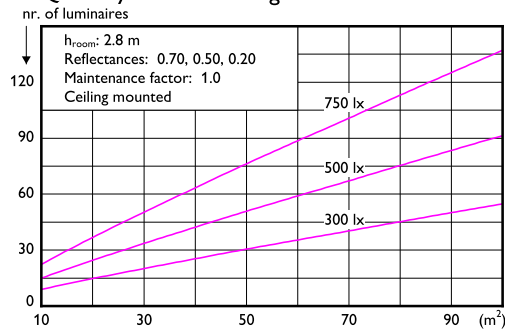
1 x 600 lm

Polar intensity diagram

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

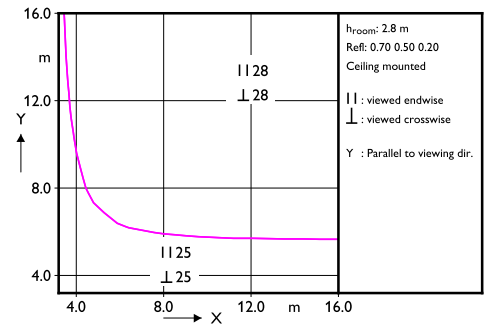
CIE flux code 49 79 95 100 100

UGRcen (4Hx8H, 0.25H) 26

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80 0.80				0.70 0.70				0.50 0.50			
	0.80	0.50	0.30	0.10	0.70	0.50	0.30	0.10	0.50	0.30	0.10	0.00
0.60	0.50	0.47	0.49	0.48	0.47	0.39	0.39	0.34	0.38	0.34	0.32	0.32
0.80	0.60	0.56	0.59	0.57	0.56	0.48	0.48	0.43	0.47	0.42	0.40	0.40
1.00	0.69	0.64	0.67	0.65	0.63	0.56	0.55	0.50	0.54	0.50	0.48	0.48
1.25	0.77	0.71	0.76	0.73	0.70	0.63	0.62	0.57	0.61	0.57	0.55	0.55
1.50	0.84	0.76	0.82	0.78	0.75	0.69	0.68	0.63	0.66	0.62	0.60	0.60
2.00	0.93	0.83	0.91	0.87	0.82	0.77	0.76	0.72	0.74	0.71	0.69	0.69
2.50	1.00	0.88	0.97	0.92	0.87	0.82	0.81	0.78	0.80	0.77	0.74	0.74
3.00	1.05	0.92	1.02	0.96	0.90	0.86	0.85	0.82	0.83	0.81	0.78	0.78
4.00	1.11	0.96	1.07	1.00	0.95	0.91	0.89	0.87	0.88	0.86	0.83	0.83
5.00	1.14	0.98	1.11	1.03	0.97	0.94	0.92	0.90	0.91	0.89	0.86	0.86

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	18356	18356	18356	18356	18356	18356	18356
50.0	17697	17697	17697	17697	17697	17697	17697
55.0	17018	17018	17018	17018	17018	17018	17018
60.0	16324	16324	16324	16324	16324	16324	16324
65.0	15582	15582	15582	15582	15582	15582	15582
70.0	14806	14806	14806	14806	14806	14806	14806
75.0	13938	13938	13938	13938	13938	13938	13938
80.0	12917	12917	12917	12917	12917	12917	12917
85.0	11270	11270	11270	11270	11270	11270	11270
90.0	19266	19266	19266	19266	19266	19266	19266

(cd/m²)

2023-01-05