



Downlight 1 x 9290023346 3000K

1 x 1200 lm


Polar intensity diagram



Quantity estimation diagram

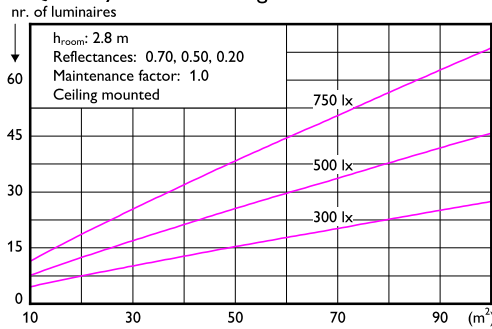

UGR diagram

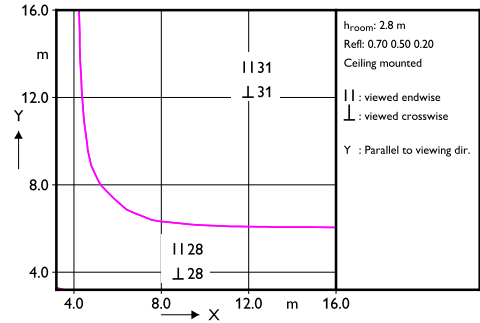

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 47 79 96 100 100

UGRcen (4Hx8H, 0.25H) 29

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)									
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30
0.60	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30
0.80	0.50	0.50	0.30	0.30	0.30	0.30	0.10	0.10	0.10	0.10
1.00	0.30	0.30	0.10	0.10	0.10	0.10	0.00	0.00	0.00	0.00
1.25	0.48	0.46	0.47	0.46	0.45	0.38	0.37	0.32	0.37	0.32
1.50	0.59	0.55	0.58	0.56	0.55	0.47	0.46	0.41	0.46	0.41
1.75	0.68	0.63	0.66	0.64	0.62	0.55	0.54	0.49	0.53	0.49
2.00	0.77	0.70	0.75	0.72	0.69	0.62	0.61	0.56	0.60	0.56
2.25	0.83	0.75	0.81	0.78	0.74	0.68	0.67	0.62	0.66	0.62
2.50	0.93	0.83	0.91	0.86	0.82	0.77	0.75	0.71	0.74	0.71
2.75	1.00	0.88	0.97	0.92	0.87	0.82	0.81	0.77	0.80	0.76
3.00	1.05	0.92	1.02	0.96	0.90	0.86	0.85	0.82	0.83	0.81
3.25	1.11	0.96	1.07	1.01	0.95	0.91	0.90	0.87	0.88	0.86
3.50	1.14	0.98	1.11	1.04	0.97	0.94	0.93	0.90	0.91	0.89

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	39369	39369	39369	39369	39369	39369	39369
50.0	38354	38354	38354	38354	38354	38354	38354
55.0	37136	37136	37136	37136	37136	37136	37136
60.0	35667	35667	35667	35667	35667	35667	35667
65.0	33836	33836	33836	33836	33836	33836	33836
70.0	31585	31585	31585	31585	31585	31585	31585
75.0	28617	28617	28617	28617	28617	28617	28617
80.0	24079	24079	24079	24079	24079	24079	24079
85.0	15048	15048	15048	15048	15048	15048	15048
90.0	3040	3040	3040	3040	3040	3040	3040

(cd/m²)

2021-08-25