
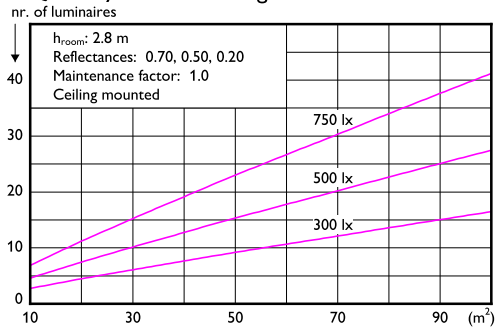
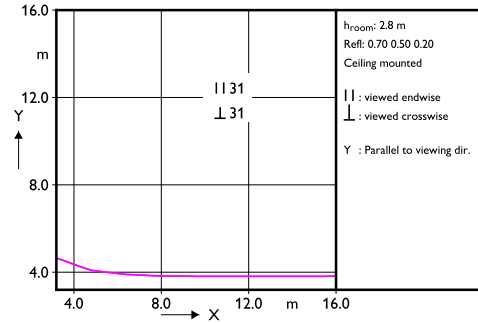


Downlight 1 x 9290023748 3000K

1 x 2000 lm

Polar intensity diagram**Quantity estimation diagram****UGR diagram**

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 47 79 96 100 100

UGRcen (4Hx8H, 0.25H) 31

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.50	0.50	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
1.00	0.48	0.46	0.47	0.46	0.45	0.38	0.37	0.32	0.37	0.32	0.30	0.30
1.25	0.59	0.55	0.58	0.56	0.55	0.47	0.46	0.41	0.46	0.41	0.39	0.39
1.50	0.68	0.63	0.66	0.64	0.62	0.55	0.54	0.49	0.53	0.49	0.46	0.46
2.00	0.77	0.70	0.75	0.72	0.69	0.62	0.61	0.56	0.60	0.56	0.54	0.54
2.50	0.83	0.75	0.81	0.78	0.74	0.68	0.67	0.62	0.66	0.62	0.59	0.59
3.00	0.93	0.83	0.91	0.86	0.82	0.77	0.75	0.71	0.74	0.71	0.68	0.68
4.00	1.00	0.88	0.97	0.92	0.87	0.82	0.81	0.77	0.80	0.76	0.74	0.74
5.00	1.05	0.92	1.02	0.96	0.90	0.86	0.85	0.82	0.83	0.81	0.78	0.78
	1.11	0.96	1.07	1.01	0.95	0.91	0.90	0.87	0.88	0.86	0.83	0.83
	1.14	0.98	1.11	1.04	0.97	0.94	0.93	0.90	0.91	0.89	0.86	0.86

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	65580	65580	65580	65580	65580	65580	65580
50.0	63813	63813	63813	63813	63813	63813	63813
55.0	61784	61784	61784	61784	61784	61784	61784
60.0	59271	59271	59271	59271	59271	59271	59271
65.0	56164	56164	56164	56164	56164	56164	56164
70.0	52279	52279	52279	52279	52279	52279	52279
75.0	47214	47214	47214	47214	47214	47214	47214
80.0	40036	40036	40036	40036	40036	40036	40036
85.0	25769	25769	25769	25769	25769	25769	25769
90.0	3178	3178	3178	3178	3178	3178	3178

(cd/m²)

2021-08-25