
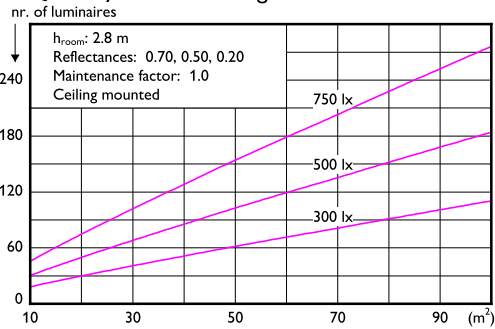
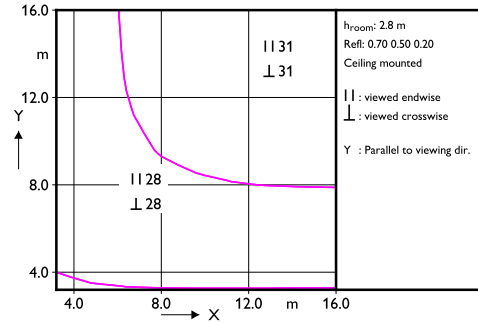


DN020 G3 LED3 NW 3.5W 220-240V 1 x 9290025083 4000K

1 x 300 lm

Polar intensity diagram**Quantity estimation diagram****UGR diagram**

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 47 78 95 100 100

UGRcen (4Hx8H, 0.25H) 29

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	31945	31945	31945	31945	31945	31945	31945
50.0	31283	31283	31283	31283	31283	31283	31283
55.0	30383	30383	30383	30383	30383	30383	30383
60.0	29468	29468	29468	29468	29468	29468	29468
65.0	28149	28149	28149	28149	28149	28149	28149
70.0	26636	26636	26636	26636	26636	26636	26636
75.0	24290	24290	24290	24290	24290	24290	24290
80.0	21071	21071	21071	21071	21071	21071	21071
85.0	14231	14231	14231	14231	14231	14231	14231
90.0	2908	2908	2908	2908	2908	2908	2908

(cd/m²)

2020-08-24