
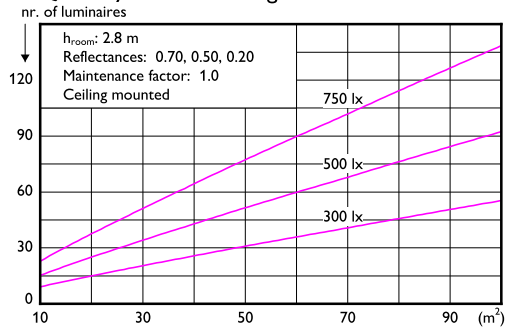
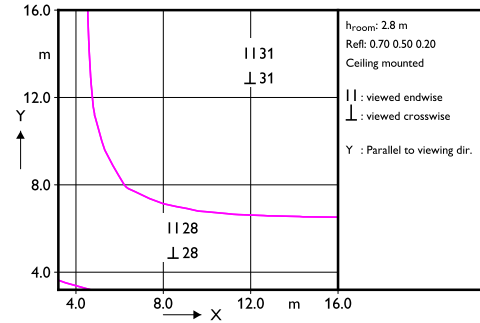


DN020 G3 LED6 NW 7W 220-240V D 1 x 9290025089 4000K

1 x 600 lm

Polar intensity diagram**Quantity estimation diagram****UGR diagram**

Light output ratio 1.00
Service upward 0.01
Service downward 0.99

CIE flux code 47 78 95 99 100

UGRcen (4Hx8H, 0.25H) 29

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)												
	0.80 0.80			0.70 0.70 0.70 0.70				0.50 0.50		0.30 0.30			0.00
	0.50 0.50			0.50 0.50 0.50 0.30				0.30 0.10		0.30 0.10			0.00
	0.30 0.10			0.30 0.20 0.10 0.10				0.10 0.10		0.10 0.10			0.00
0.60	0.48	0.46	0.47	0.46	0.45	0.38	0.37	0.32	0.37	0.32	0.30		
0.80	0.59	0.55	0.58	0.56	0.54	0.47	0.46	0.41	0.45	0.41	0.39		
1.00	0.68	0.63	0.66	0.64	0.62	0.54	0.54	0.48	0.53	0.48	0.46		
1.25	0.76	0.70	0.74	0.71	0.69	0.62	0.61	0.56	0.60	0.55	0.53		
1.50	0.83	0.75	0.81	0.77	0.74	0.67	0.66	0.62	0.65	0.61	0.58		
2.00	0.93	0.83	0.90	0.86	0.81	0.76	0.75	0.70	0.73	0.70	0.67		
2.50	0.99	0.88	0.96	0.91	0.86	0.82	0.80	0.76	0.78	0.75	0.73		
3.00	1.04	0.91	1.01	0.95	0.90	0.86	0.84	0.81	0.82	0.79	0.77		
4.00	1.10	0.95	1.06	1.00	0.94	0.90	0.89	0.86	0.87	0.85	0.82		
5.00	1.14	0.98	1.10	1.03	0.96	0.94	0.92	0.89	0.90	0.88	0.85		

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	35511	35511	35511	35511	35511	35511	35511
50.0	34869	34869	34869	34869	34869	34869	34869
55.0	34036	34036	34036	34036	34036	34036	34036
60.0	33003	33003	33003	33003	33003	33003	33003
65.0	31719	31719	31719	31719	31719	31719	31719
70.0	29968	29968	29968	29968	29968	29968	29968
75.0	27766	27766	27766	27766	27766	27766	27766
80.0	24657	24657	24657	24657	24657	24657	24657
85.0	18640	18640	18640	18640	18640	18640	18640
90.0	8246	8246	8246	8246	8246	8246	8246

(cd/m²)

2020-08-24