
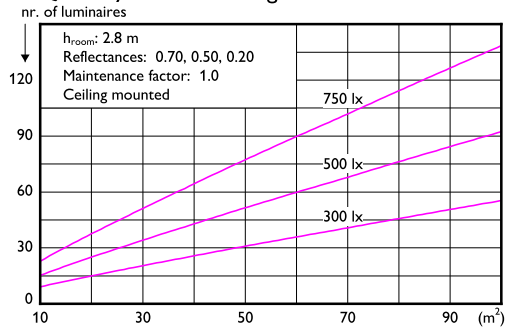
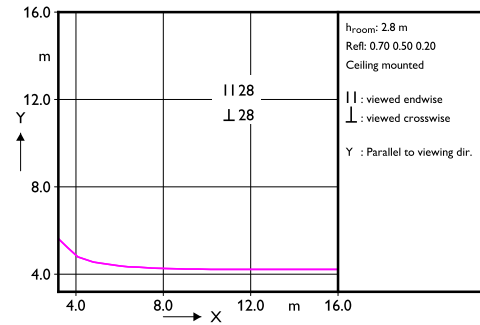


DN020 G3 LED6 NW 7W 220-240V D 1 x 9290025092 4000K

1 x 600 lm

Polar intensity diagram**Quantity estimation diagram****UGR diagram**

Light output ratio 1.00
Service upward 0.01
Service downward 0.99

CIE flux code 47 78 95 99 100

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	23586	23586	23586	23586	23586	23586	23586
50.0	23144	23144	23144	23144	23144	23144	23144
55.0	22588	22588	22588	22588	22588	22588	22588
60.0	21885	21885	21885	21885	21885	21885	21885
65.0	21039	21039	21039	21039	21039	21039	21039
70.0	19904	19904	19904	19904	19904	19904	19904
75.0	18454	18454	18454	18454	18454	18454	18454
80.0	16447	16447	16447	16447	16447	16447	16447
85.0	12613	12613	12613	12613	12613	12613	12613
90.0	14714	14714	14714	14714	14714	14714	14714

(cd/m²)

2020-08-24