


Downlight 1 x 9290026753 6500K

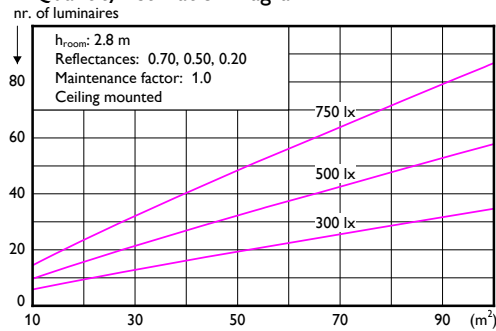
1 x 950 lm

Polar intensity diagram

Light output ratio 1.00
 Service upward 0.00
 Service downward 1.00

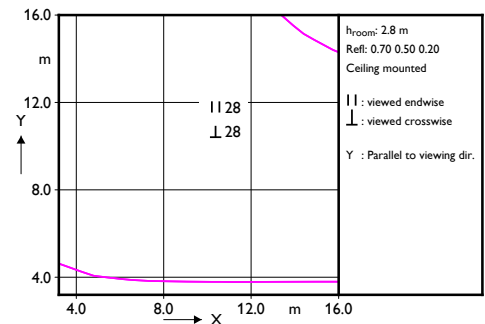
CIE flux code 47 79 96 100 100

UGRcen (4Hx8H, 0.25H) 28

Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.48	0.46	0.47	0.46	0.45	0.38	0.37	0.32	0.37	0.32	0.30	0.30
0.80	0.59	0.55	0.58	0.56	0.55	0.47	0.46	0.41	0.46	0.41	0.39	0.39
1.00	0.68	0.63	0.66	0.64	0.62	0.55	0.54	0.49	0.53	0.49	0.46	0.46
1.25	0.77	0.70	0.75	0.72	0.69	0.62	0.61	0.56	0.60	0.56	0.54	0.54
1.50	0.83	0.75	0.81	0.78	0.74	0.68	0.67	0.62	0.66	0.62	0.59	0.59
2.00	0.93	0.83	0.91	0.86	0.82	0.77	0.75	0.71	0.74	0.71	0.68	0.68
2.50	1.00	0.88	0.97	0.92	0.87	0.82	0.81	0.77	0.80	0.76	0.74	0.74
3.00	1.05	0.92	1.02	0.96	0.90	0.86	0.85	0.82	0.83	0.81	0.78	0.78
4.00	1.11	0.96	1.07	1.01	0.95	0.91	0.90	0.87	0.88	0.86	0.83	0.83
5.00	1.14	0.98	1.11	1.04	0.97	0.94	0.93	0.90	0.91	0.89	0.86	0.86

Ceiling mounted

UGR diagram**Luminance Table**

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	27294	27294	27294	27294	27294	27294	27294
50.0	26717	26717	26717	26717	26717	26717	26717
55.0	26019	26019	26019	26019	26019	26019	26019
60.0	25152	25152	25152	25152	25152	25152	25152
65.0	24029	24029	24029	24029	24029	24029	24029
70.0	22538	22538	22538	22538	22538	22538	22538
75.0	20562	20562	20562	20562	20562	20562	20562
80.0	17942	17942	17942	17942	17942	17942	17942
85.0	14321	14321	14321	14321	14321	14321	14321
90.0	24256	24256	24256	24256	24256	24256	24256

(cd/m²)

2022-04-23