



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

GreenSpace Evo ST333T short spotlight

Signify N.V.



EPD HUB, HUB-5259

Published on 04.02.2026, last updated on 04.02.2026, valid until 04.02.2031

MANUFACTURER AND SITE

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global
Place of production	TAMASI, HUNGARY
Place(s) of raw material origin	APAC, EU
Place(s) of installation and use	EU
Period for data	Calendar Year 2023

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR version 1.2, 24 Mar 2025
Sector	Electrical product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-A5, B6, and modules C1-C4, D
EPD author	Signify / Sustainability
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD verifier	Imane Uald Lamkaddam as an authorized verifier for EPD Hub

PRODUCT SPECIFICATION

Product name	GreenSpace Evo ST333T short spotlight
Product number / reference	910505104861 / ST333T 39S/PW930UE PSU HMB T102 WH481
GTIN (Global Trade Item Number)	Not applicable
NOBB (Norwegian Building Product Database)	Not applicable
A1-A3 Specific data (%)	7.52

PRODUCT DESCRIPTION

GreenSpace Evo Projector is a powerful and flexible projector for retail with a subtle and neutral design. The 3D printed housing is crafted from at least 55% recycled or bio-circular materials, while the heatsink is made from 85% recycled aluminium. Because of its circular design, the luminaire is upgradable, reusable, fully serviceable and recyclable. Combined with the high energy efficiency, this makes the GreenSpace Evo a sustainable projector choice. The PerfectAccent reflectors ensure a light effect with increased sparkle and improved shopper eye comfort. GreenSpace Evo also comes in state-of-the-art ultra-efficient variants and integrates seamlessly onto 3C- and DALI-tracks, CoreLine Trunking and Maxos fusion.

This EPD is intended for business-to-business and/or business-to-consumer communication. Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT CLASSIFICATION

Declared operating voltage, Volt	220-240
Light source colour temperature, Kelvin	3000
Protection index for water and dust (IP)	20
Impact resistance index (IK)	2
Luminous flux, Lumens	3900
Electrical power, Watt	24.5
Luminous efficiency, Lm/W	159
Additional characteristic	Not applicable

ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people's lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	56.79	APAC , EU
Minerals	0	EU
Fossil materials	43.21	APAC , EU
Bio-based materials	0	EU

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.139

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit
Declared unit mass, kg	0.616
Mass of packaging, kg	0.351
Functional unit (from PEP PSR0014)	Provide lighting that delivers an outgoing artificial luminous flux of 1000 lumens during a reference lifetime of 35000 hours
Reference service life (years)	10
Assigned lifetime (hours)	100000
GWP-total, A1-A3 (kg CO ₂ e)	6.78
GWP-fossil, A1-A3 (kg CO ₂ e)	7.25
Secondary material, inputs (%)	33.9
Secondary material, outputs (%)	40.5
Total energy use, A1-A3 (kWh)	28.7
Net freshwater use, A1-A3 (m ³)	6.22E-02

LIFE CYCLE ASSESSMENT

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Installation stage		Use stage							End of life stage				Beyond the system
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	ND	ND	ND	X	ND	X	X	X	X	X
Raw materials	Transport	Manufacturing	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demo.	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling

Modules not declared = ND.

CUT - OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. There is no neglected unit process more than 1% of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product's manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass
Manufacturing energy and waste	Allocated by mass

Proxy data is used for certain materials due to their unavailability in the database. Conservative choices have been adopted when exact information was missing. Regarding module C1-C4: EOL scenarios are based on default values from EN 50693. For stages description please refer to section Product life cycle in this EPD report.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA Luminaire EPD Generator v2.2.7. The LCA and EPD have been prepared according to the reference standards, EN 50693, and ISO 14040/14044. Ecoinvent v 3.10.1 and One Click LCA databases were used as sources of environmental data. Allocation used in Ecoinvent 3.10.1 environmental data sources follow the methodology 'allocation, cut-off, EN 15804+A2'.

No other sources were used in the modelling of this EPD.

PRODUCT & MANUFACTURING SITES GROUPING

Type of grouping	No grouping
Grouping method	Not applicable
Variation in GWP-fossil for A1-A3, %	-

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE CYCLE

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production. The material losses occurring during the manufacturing processes are treated as per the waste handling practices in the factory, while scenario assumptions are made in the absence of exact data. The study also considers the fuels used by machines as well as losses during electricity transmission.

The product is made of metals, plastics, and electronic components. All components are transported to the production facility, where the main manufacturing processes primarily are associated with assembly. A2 transport distances are calculated always taking the capital city of component country of origin as a starting point and exact manufacturing location as destination. The finished product can be packaged with polyethylene, cardboard, and/or paper as packaging material before shipment to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible to produce the studied product. Thus, it is possible to allocate it according to the weight of the product analysed in this study.

Co-product allocation is neglected as revenue of co-product is very low, hence, the waste undergoes a conservative waste treatment.

The use of renewable energy in manufacturing is demonstrated through contractual instruments (GOs, RECs, etc), and its use is ensured throughout the validity period of this EPD.

TRANSPORT AND INSTALLATION (A4-A5)

A4 transport distances are calculated always taking the exact manufacturing location to customer location. If the customer's location is defined as a country or its capital city, the calculation is made to the respective capital city. If the

customer's location is specified as a region, the distance is calculated to the capital city of the best-performing sales country within that region. The transportation method is a combination of lorry and container ship where needed. To be conservative, empty returns are included in this study as implemented through an average load factor in the Ecoinvent transport datapoints. Environmental impacts from installation include waste packaging materials (A5). The packaging waste treatment is assumed to be conservative with incineration without energy recovery. The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

PRODUCT USE AND MAINTENANCE (B1-B7)


During the use phase, the product consumes electricity (B6), which is calculated multiplying the Wattage x Assigned lifetime (hours) x Country energy mix factor. To know which Country energy mix was used in this EPD, please refer to Annex 2.

The Reference service life in years is calculated according to the main application type of the product, based on annual operating hours. Impacts due to electricity production include direct emissions to air, transformation, and transmission losses.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. The transport distance is 150 km while the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

LIFE CYCLE FLOW DIAGRAM - SYSTEM BOUNDARY

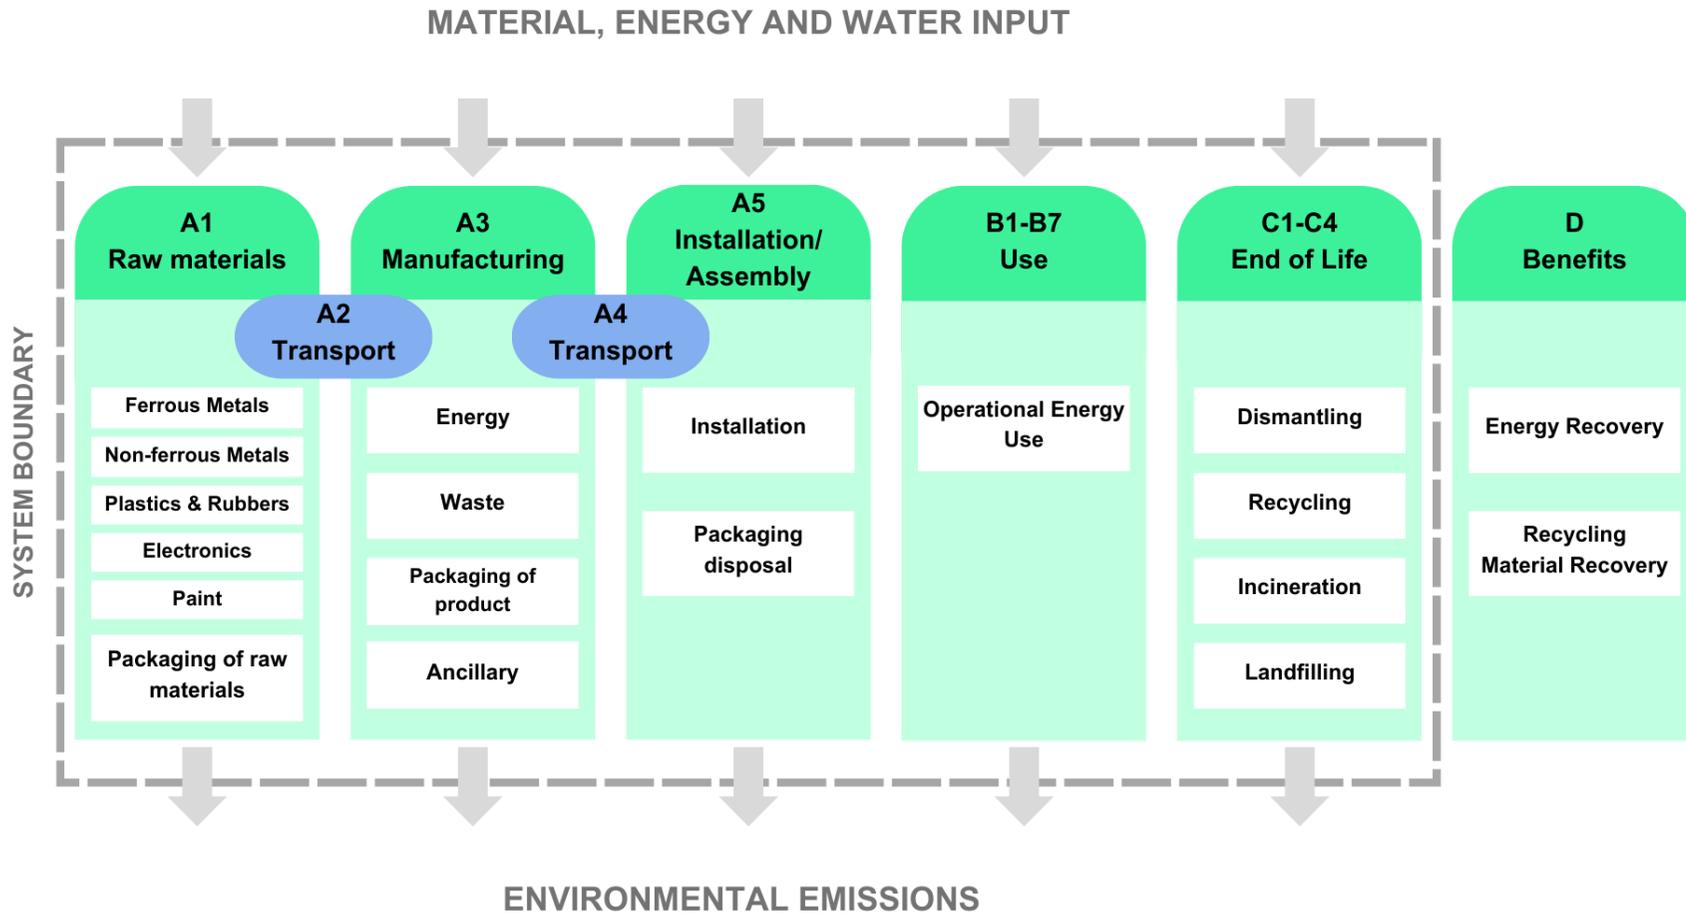

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	6.53E+00	6.57E-02	1.86E-01	6.78E+00	1.02E-01	5.30E-01	ND	ND	ND	ND	ND	8.06E+02	ND	0.00E+00	1.81E-02	2.26E-01	1.18E-01	-6.23E-01
GWP – fossil	kg CO ₂ e	6.58E+00	6.56E-02	6.09E-01	7.25E+00	1.02E-01	2.23E-02	ND	ND	ND	ND	ND	8.02E+02	ND	0.00E+00	1.81E-02	2.26E-01	1.18E-01	-6.22E-01
GWP – biogenic	kg CO ₂ e	-5.83E-02	1.32E-05	-4.34E-01	-4.92E-01	2.30E-05	5.08E-01	ND	ND	ND	ND	ND	1.80E+00	ND	0.00E+00	3.95E-06	-4.34E-05	-1.63E-05	-4.99E-04
GWP – LULUC	kg CO ₂ e	9.78E-03	3.15E-05	1.16E-02	2.14E-02	4.54E-05	8.12E-06	ND	ND	ND	ND	ND	2.46E+00	ND	0.00E+00	8.00E-06	2.24E-05	5.72E-06	-7.27E-04
Ozone depletion pot.	kg CFC-11e	1.26E-07	9.60E-10	1.84E-08	1.46E-07	1.50E-09	3.03E-10	ND	ND	ND	ND	ND	1.48E-05	ND	0.00E+00	2.53E-10	1.96E-10	1.18E-10	-3.32E-09
Acidification potential	mol H ⁺ e	5.47E-02	8.22E-04	2.65E-03	5.82E-02	3.46E-04	1.31E-04	ND	ND	ND	ND	ND	4.71E+00	ND	0.00E+00	6.02E-05	1.57E-04	5.00E-05	-1.14E-02
EP-freshwater ²⁾	kg Pe	4.24E-03	4.04E-06	2.34E-04	4.48E-03	7.91E-06	2.21E-06	ND	ND	ND	ND	ND	7.47E-01	ND	0.00E+00	1.41E-06	7.33E-06	9.14E-07	-6.57E-04
EP-marine	kg Ne	7.53E-03	2.16E-04	1.22E-03	8.97E-03	1.14E-04	6.11E-05	ND	ND	ND	ND	ND	7.40E-01	ND	0.00E+00	1.95E-05	5.08E-05	2.15E-04	-8.80E-04
EP-terrestrial	mol Ne	8.71E-02	2.39E-03	7.53E-03	9.71E-02	1.24E-03	5.57E-04	ND	ND	ND	ND	ND	6.63E+00	ND	0.00E+00	2.12E-04	4.88E-04	2.24E-04	-1.02E-02
POCP (“smog”) ³⁾	kg NMVOCe	3.00E-02	7.21E-04	2.56E-03	3.33E-02	5.11E-04	1.58E-04	ND	ND	ND	ND	ND	2.18E+00	ND	0.00E+00	8.39E-05	1.33E-04	6.58E-05	-3.07E-03
ADP-minerals & metals ⁴⁾	kg Sbe	6.00E-04	1.41E-07	3.25E-06	6.03E-04	2.83E-07	6.55E-08	ND	ND	ND	ND	ND	1.08E-02	ND	0.00E+00	5.93E-08	4.72E-07	1.73E-08	-1.22E-04
ADP-fossil resources	MJ	9.06E+01	9.00E-01	8.06E+00	9.95E+01	1.47E+00	2.28E-01	ND	ND	ND	ND	ND	1.87E+04	ND	0.00E+00	2.53E-01	2.05E-01	9.05E-02	-7.19E+00
Water use ⁵⁾	m ³ e depr.	2.48E+00	3.84E-03	2.30E-01	2.72E+00	7.28E-03	2.64E-02	ND	ND	ND	ND	ND	5.09E+02	ND	0.00E+00	1.18E-03	1.69E-02	7.77E-03	-1.35E-01

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	4.46E-07	4.94E-09	4.78E-08	4.99E-07	1.02E-08	1.63E-09	ND	ND	ND	ND	ND	1.68E-05	ND	0.00E+00	1.43E-09	1.61E-09	6.64E-10	-4.60E-08
Ionizing radiation ⁶⁾	kBq U235e	5.20E-01	6.65E-04	2.80E-02	5.49E-01	1.28E-03	2.76E-04	ND	ND	ND	ND	ND	5.16E+02	ND	0.00E+00	2.05E-04	1.21E-03	1.26E-04	-5.58E-02
Ecotoxicity (freshwater)	CTUe	1.36E+02	1.08E-01	2.95E+00	1.39E+02	2.09E-01	6.30E-01	ND	ND	ND	ND	ND	2.84E+03	ND	0.00E+00	4.01E-02	4.87E-01	7.48E+00	-7.73E+00
Human toxicity, cancer	CTUh	7.31E-09	1.19E-11	3.02E-10	7.63E-09	1.68E-11	3.04E-11	ND	ND	ND	ND	ND	2.71E-07	ND	0.00E+00	3.07E-12	2.62E-11	1.69E-11	-1.13E-09
Human tox. non-cancer	CTUh	2.52E-07	4.69E-10	8.28E-09	2.61E-07	9.54E-10	1.24E-09	ND	ND	ND	ND	ND	1.41E-05	ND	0.00E+00	1.59E-10	1.18E-09	9.17E-10	-1.09E-07
SQP ⁷⁾	-	3.69E+01	6.44E-01	3.23E+01	6.99E+01	1.48E+00	1.11E-01	ND	ND	ND	ND	ND	4.15E+03	ND	0.00E+00	1.51E-01	1.90E-01	1.30E-01	-4.00E+00

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	1.00E+01	1.06E-02	1.39E+00	1.14E+01	2.02E-02	-6.23E+00	ND	ND	ND	ND	ND	5.12E+03	ND	0.00E+00	3.48E-03	2.60E-02	2.26E-03	-7.93E-01
Renew. PER as material	MJ	7.05E-01	0.00E+00	3.78E+00	4.48E+00	0.00E+00	-4.48E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-2.47E-04	-4.60E-04	0.00E+00
Total use of renew. PER	MJ	1.07E+01	1.06E-02	5.17E+00	1.59E+01	2.02E-02	-1.07E+01	ND	ND	ND	ND	ND	5.12E+03	ND	0.00E+00	3.48E-03	2.58E-02	1.80E-03	-7.93E-01
Non-re. PER as energy	MJ	8.33E+01	9.00E-01	7.57E+00	9.18E+01	1.47E+00	2.24E-01	ND	ND	ND	ND	ND	1.87E+04	ND	0.00E+00	2.53E-01	-3.16E+00	-4.97E+00	-7.11E+00
Non-re. PER as material	MJ	7.27E+00	0.00E+00	-3.62E-01	6.90E+00	0.00E+00	-4.13E-02	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-3.47E+00	-3.39E+00	0.00E+00
Total use of non-re. PER	MJ	9.06E+01	9.00E-01	7.20E+00	9.87E+01	1.47E+00	1.82E-01	ND	ND	ND	ND	ND	1.87E+04	ND	0.00E+00	2.53E-01	-6.64E+00	-8.36E+00	-7.11E+00
Secondary materials	kg	2.09E-01	0.00E+00	0.00E+00	2.09E-01	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ	9.28E-03	3.63E-06	3.84E-02	4.77E-02	7.97E-06	2.83E-06	ND	ND	ND	ND	ND	2.46E-02	ND	0.00E+00	1.45E-06	9.19E-06	1.42E-06	-7.40E-05
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	5.70E-02	1.11E-04	5.14E-03	6.22E-02	2.18E-04	4.27E-04	ND	ND	ND	ND	ND	1.61E+01	ND	0.00E+00	3.36E-05	3.21E-04	-3.55E-04	-6.02E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	9.80E-01	1.42E-03	3.46E-02	1.02E+00	2.50E-03	6.93E-03	ND	ND	ND	ND	ND	4.72E+01	ND	0.00E+00	4.42E-04	4.90E-03	1.63E-02	-1.11E-01
Non-hazardous waste	kg	2.31E+01	2.44E-02	1.45E+00	2.45E+01	4.62E-02	3.75E-01	ND	ND	ND	ND	ND	3.65E+03	ND	0.00E+00	8.29E-03	1.31E-01	8.44E-01	-3.41E+00
Radioactive waste	kg	1.31E-04	1.63E-07	6.66E-06	1.38E-04	3.14E-07	6.91E-08	ND	ND	ND	ND	ND	1.32E-01	ND	0.00E+00	5.03E-08	2.96E-07	3.12E-08	-1.37E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	2.29E-03	2.29E-03	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	2.49E-01	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.03E+00	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	4.34E-01	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	5.96E-01	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	6.56E+00	6.53E-02	6.57E-01	7.28E+00	1.01E-01	2.21E-02	ND	ND	ND	ND	ND	8.02E+02	ND	0.00E+00	1.80E-02	2.26E-01	1.17E-01	-6.19E-01
Ozone depletion Pot.	kg CFC-11e	1.17E-07	7.64E-10	1.83E-08	1.36E-07	1.20E-09	2.57E-10	ND	ND	ND	ND	ND	1.23E-05	ND	0.00E+00	2.02E-10	1.68E-10	9.78E-11	-2.88E-09
Acidification	kg SO ₂ e	4.57E-02	6.52E-04	1.83E-03	4.82E-02	2.65E-04	9.61E-05	ND	ND	ND	ND	ND	4.02E+00	ND	0.00E+00	4.61E-05	1.22E-04	3.61E-05	-9.97E-03
Eutrophication	kg PO ₄ ³ e	1.35E-02	8.64E-05	1.27E-03	1.48E-02	6.44E-05	2.99E-05	ND	ND	ND	ND	ND	5.20E-01	ND	0.00E+00	1.12E-05	2.47E-05	2.21E-05	-6.11E-04
POCP (“smog”)	kg C ₂ H ₄ e	4.18E-03	3.67E-05	2.06E-04	4.42E-03	2.36E-05	7.32E-06	ND	ND	ND	ND	ND	2.19E-01	ND	0.00E+00	4.13E-06	7.43E-06	4.00E-06	-4.74E-04
ADP-elements	kg Sbe	5.97E-04	1.38E-07	3.20E-06	6.01E-04	2.76E-07	5.47E-08	ND	ND	ND	ND	ND	1.08E-02	ND	0.00E+00	5.79E-08	4.65E-07	1.46E-08	-1.21E-04
ADP-fossil	MJ	8.21E+01	8.90E-01	7.60E+00	9.06E+01	1.45E+00	2.23E-01	ND	ND	ND	ND	ND	9.57E+03	ND	0.00E+00	2.50E-01	1.86E-01	8.85E-02	-6.30E+00

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG 9)	kg CO ₂ e	6.59E+00	6.57E-02	6.20E-01	7.28E+00	1.02E-01	2.23E-02	ND	ND	ND	ND	ND	8.04E+02	ND	0.00E+00	1.81E-02	2.26E-01	1.18E-01	-6.23E-01

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

ENVIRONMENTAL IMPACT DATA, RESULTS PER FUNCTIONAL UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ éq/FU	5.86E-01	5.89E-03	1.67E-02	6.09E-01	9.12E-03	4.76E-02	ND	ND	ND	ND	ND	7.24E+01	ND	0.00E+00	1.62E-03	2.03E-02	1.06E-02	-5.59E-02
GWP – fossil	kg CO ₂ éq/FU	5.91E-01	5.89E-03	5.46E-02	6.51E-01	9.12E-03	2.00E-03	ND	ND	ND	ND	ND	7.20E+01	ND	0.00E+00	1.62E-03	2.03E-02	1.06E-02	-5.58E-02
GWP – biogenic	kg CO ₂ éq/FU	-5.24E-03	1.19E-06	-3.89E-02	-4.42E-02	2.06E-06	4.56E-02	ND	ND	ND	ND	ND	1.61E-01	ND	0.00E+00	3.54E-07	-3.89E-06	-1.46E-06	-4.48E-05
GWP – LULUC	kg CO ₂ éq/FU	8.78E-04	2.83E-06	1.04E-03	1.92E-03	4.08E-06	7.29E-07	ND	ND	ND	ND	ND	2.21E-01	ND	0.00E+00	7.18E-07	2.01E-06	5.14E-07	-6.52E-05
Ozone depletion pot.	kg CFC-11e/FU	1.13E-08	8.61E-11	1.65E-09	1.31E-08	1.35E-10	2.72E-11	ND	ND	ND	ND	ND	1.33E-06	ND	0.00E+00	2.27E-11	1.76E-11	1.06E-11	-2.98E-10
Acidification potential	mole H ⁺ e/FU	4.91E-03	7.38E-05	2.38E-04	5.22E-03	3.11E-05	1.17E-05	ND	ND	ND	ND	ND	4.23E-01	ND	0.00E+00	5.40E-06	1.41E-05	4.49E-06	-1.03E-03
EP-freshwater ²⁾	kg Pe/FU	3.81E-04	3.62E-07	2.10E-05	4.02E-04	7.10E-07	1.98E-07	ND	ND	ND	ND	ND	6.70E-02	ND	0.00E+00	1.26E-07	6.58E-07	8.20E-08	-5.89E-05
EP-marine	kg Ne/FU	6.76E-04	1.94E-05	1.09E-04	8.05E-04	1.02E-05	5.48E-06	ND	ND	ND	ND	ND	6.64E-02	ND	0.00E+00	1.75E-06	4.56E-06	1.93E-05	-7.90E-05
EP-terrestrial	mol Ne/FU	7.82E-03	2.15E-04	6.76E-04	8.71E-03	1.11E-04	5.00E-05	ND	ND	ND	ND	ND	5.95E-01	ND	0.00E+00	1.91E-05	4.38E-05	2.01E-05	-9.20E-04
POCP (“smog”) ³⁾	kg NMVOCe/	2.69E-03	6.47E-05	2.29E-04	2.99E-03	4.58E-05	1.42E-05	ND	ND	ND	ND	ND	1.96E-01	ND	0.00E+00	7.53E-06	1.19E-05	5.91E-06	-2.76E-04
ADP-minerals & metals ⁴⁾	kg Sbe/FU	5.39E-05	1.27E-08	2.91E-07	5.42E-05	2.54E-08	5.88E-09	ND	ND	ND	ND	ND	9.71E-04	ND	0.00E+00	5.33E-09	4.23E-08	1.55E-09	-1.09E-05
ADP-fossil resources	MJ/FU	8.13E+00	8.08E-02	7.23E-01	8.93E+00	1.32E-01	2.04E-02	ND	ND	ND	ND	ND	1.67E+03	ND	0.00E+00	2.27E-02	1.84E-02	8.12E-03	-6.46E-01
Water use ⁵⁾	m ³ e priv./FU	2.23E-01	3.44E-04	2.06E-02	2.44E-01	6.53E-04	2.37E-03	ND	ND	ND	ND	ND	4.56E+01	ND	0.00E+00	1.06E-04	1.52E-03	6.97E-04	-1.21E-02

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence /FU	4.00E-08	4.44E-10	4.29E-09	4.48E-08	9.13E-10	1.46E-10	ND	ND	ND	ND	ND	1.51E-06	ND	0.00E+00	1.29E-10	1.44E-10	5.96E-11	-4.13E-09
Ionizing radiation ⁶⁾	kBq U235e/FU	4.67E-02	5.97E-05	2.52E-03	4.92E-02	1.15E-04	2.48E-05	ND	ND	ND	ND	ND	4.63E+01	ND	0.00E+00	1.84E-05	1.08E-04	1.13E-05	-5.00E-03
Ecotoxicity (freshwater)	CTUe/FU	1.22E+01	9.71E-03	2.65E-01	1.25E+01	1.87E-02	5.65E-02	ND	ND	ND	ND	ND	2.55E+02	ND	0.00E+00	3.60E-03	4.37E-02	6.71E-01	-6.93E-01
Human toxicity, cancer	CTUh/FU	6.56E-10	1.07E-12	2.71E-11	6.84E-10	1.50E-12	2.72E-12	ND	ND	ND	ND	ND	2.43E-08	ND	0.00E+00	2.76E-13	2.35E-12	1.52E-12	-1.02E-10
Human tox. non-cancer	CTUh/FU	2.27E-08	4.21E-11	7.43E-10	2.34E-08	8.57E-11	1.11E-10	ND	ND	ND	ND	ND	1.26E-06	ND	0.00E+00	1.42E-11	1.06E-10	8.23E-11	-9.82E-09
SQP ⁷⁾	-/FU	3.32E+00	5.78E-02	2.90E+00	6.27E+00	1.33E-01	1.00E-02	ND	ND	ND	ND	ND	3.73E+02	ND	0.00E+00	1.36E-02	1.71E-02	1.16E-02	-3.59E-01

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ/FU	8.97E-01	9.53E-04	1.25E-01	1.02E+00	1.81E-03	-5.59E-01	ND	ND	ND	ND	ND	4.59E+02	ND	0.00E+00	3.12E-04	2.34E-03	2.03E-04	-7.12E-02
Renew. PER as material	MJ/FU	6.33E-02	0.00E+00	3.39E-01	4.02E-01	0.00E+00	-4.02E-01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-2.22E-05	-4.12E-05	0.00E+00
Total use of renew. PER	MJ/FU	9.61E-01	9.53E-04	4.64E-01	1.43E+00	1.81E-03	-9.62E-01	ND	ND	ND	ND	ND	4.59E+02	ND	0.00E+00	3.12E-04	2.31E-03	1.61E-04	-7.12E-02
Non-re. PER as energy	MJ/FU	7.48E+00	8.08E-02	6.79E-01	8.24E+00	1.32E-01	2.01E-02	ND	ND	ND	ND	ND	1.67E+03	ND	0.00E+00	2.27E-02	-2.84E-01	-4.46E-01	-6.39E-01
Non-re. PER as material	MJ/FU	6.52E-01	0.00E+00	-3.25E-02	6.20E-01	0.00E+00	-3.70E-03	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-3.12E-01	-3.04E-01	0.00E+00
Total use of non-re. PER	MJ/FU	8.13E+00	8.08E-02	6.46E-01	8.86E+00	1.32E-01	1.64E-02	ND	ND	ND	ND	ND	1.67E+03	ND	0.00E+00	2.27E-02	-5.95E-01	-7.51E-01	-6.39E-01
Secondary materials	kg/FU	1.88E-02	0.00E+00	0.00E+00	1.88E-02	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ/FU	8.33E-04	3.26E-07	3.45E-03	4.28E-03	7.15E-07	2.54E-07	ND	ND	ND	ND	ND	2.21E-03	ND	0.00E+00	1.30E-07	8.25E-07	1.28E-07	-6.64E-06
Non-ren. secondary fuels	MJ/FU	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³ /FU	5.11E-03	9.92E-06	4.61E-04	5.58E-03	1.96E-05	3.83E-05	ND	ND	ND	ND	ND	1.45E+00	ND	0.00E+00	3.01E-06	2.88E-05	-3.19E-05	-5.40E-04

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg/FU	8.80E-02	1.27E-04	3.10E-03	9.12E-02	2.24E-04	6.22E-04	ND	ND	ND	ND	ND	4.24E+00	ND	0.00E+00	3.97E-05	4.40E-04	1.46E-03	-9.99E-03
Non-hazardous waste	kg/FU	2.07E+00	2.19E-03	1.30E-01	2.20E+00	4.15E-03	3.37E-02	ND	ND	ND	ND	ND	3.28E+02	ND	0.00E+00	7.44E-04	1.18E-02	7.57E-02	-3.06E-01
Radioactive waste	kg/FU	1.17E-05	1.46E-08	5.97E-07	1.24E-05	2.82E-08	6.20E-09	ND	ND	ND	ND	ND	1.19E-02	ND	0.00E+00	4.51E-09	2.66E-08	2.80E-09	-1.23E-06

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	2.06E-04	2.06E-04	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	2.24E-02	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	9.24E-02	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	3.89E-02	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	5.35E-02	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ eq./FU	5.88E-01	5.86E-03	5.90E-02	6.53E-01	9.07E-03	1.98E-03	ND	ND	ND	ND	ND	7.20E+01	ND	0.00E+00	1.61E-03	2.03E-02	1.05E-02	-5.55E-02
Ozone depletion Pot.	kg CFC ₁₁ e/FU	1.05E-08	6.86E-11	1.65E-09	1.22E-08	1.07E-10	2.31E-11	ND	ND	ND	ND	ND	1.11E-06	ND	0.00E+00	1.81E-11	1.51E-11	8.78E-12	-2.59E-10
Acidification	kg SO ₂ e/FU	4.10E-03	5.85E-05	1.64E-04	4.33E-03	2.37E-05	8.63E-06	ND	ND	ND	ND	ND	3.61E-01	ND	0.00E+00	4.14E-06	1.10E-05	3.24E-06	-8.95E-04
Eutrophication	kg PO ₄ ³ e/FU	1.21E-03	7.75E-06	1.14E-04	1.33E-03	5.78E-06	2.68E-06	ND	ND	ND	ND	ND	4.66E-02	ND	0.00E+00	1.01E-06	2.22E-06	1.98E-06	-5.48E-05
POCP (“smog”)	kg C ₂ H ₄ e/FU	3.75E-04	3.29E-06	1.85E-05	3.97E-04	2.12E-06	6.57E-07	ND	ND	ND	ND	ND	1.96E-02	ND	0.00E+00	3.71E-07	6.67E-07	3.59E-07	-4.26E-05
ADP-elements	kg Sbe/FU	5.36E-05	1.24E-08	2.88E-07	5.39E-05	2.48E-08	4.91E-09	ND	ND	ND	ND	ND	9.69E-04	ND	0.00E+00	5.20E-09	4.18E-08	1.31E-09	-1.09E-05
ADP-fossil	MJ/FU	7.37E+00	7.98E-02	6.82E-01	8.13E+00	1.30E-01	2.00E-02	ND	ND	ND	ND	ND	8.59E+02	ND	0.00E+00	2.25E-02	1.67E-02	7.94E-03	-5.66E-01

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ⁹⁾	kg CO ₂ e/FU	5.91E-01	5.89E-03	5.57E-02	6.53E-01	9.12E-03	2.00E-03	ND	ND	ND	ND	ND	7.22E+01	ND	0.00E+00	1.62E-03	2.03E-02	1.06E-02	-5.59E-02

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

SCENARIO DOCUMENTATION

DATA SOURCES

Manufacturing energy scenario documentation – A3 (Energy data source)

1. Energy supply, electricity production, co-generation oil and gas, Heat and power co-generation, natural gas, combined cycle power plant, 400MW electrical, Hungary,ecoinvent 3.10.1, 0.0326 kgCO_{2e}/MJ
2. Energy supply, electricity production, solar photovoltaic, Electricity production, photovoltaic, 570kWp open ground installation, multi-Si, World,ecoinvent 3.10.1, 0.0829 kgCO_{2e}/kWh

Transport scenario documentation - A4

1. Transport, freight, lorry >32 metric ton, EURO5, 975.92 km
2. Transport, freight, sea, container ship, 0.0 km

Installation scenario documentation - A5 (Waste materials data source)

1. Market for corrugated board box, 0.35 kg
2. Market for printed paper, offset, 0.0011 kg
3. Market for packaging film, low density polyethylene, 1.09E-4 kg

Use stages scenario documentation - B6-B7 (Energy data source)

1. Energy supply, electricity transformation and distribution, distribution low voltage, Market group for electricity, low voltage, Europe, 2450.0 kWh

TRANSPORT SCENARIO DOCUMENTATION - A4

Scenario parameter	Value
Capacity utilization (including empty return) %	50 %
Bulk density of transported products / kg/m ³	8.72E+01
Volume capacity utilization factor (factor: =1 or <1 or ≥1 for compressed or nested packaged products)	1

INSTALLATION SCENARIO DOCUMENTATION - A5

Scenario parameter	Value
Ancillary materials for installation (specified by material) / kg or other units as appropriate	0
Water use / m ³	0
Other resource use / kg	0
Direct emissions to ambient air, soil and water / kg	0

USE STAGES SCENARIO DOCUMENTATION - B6-B7 USE OF ENERGY AND WATER

Scenario information	Value
Ancillary materials specified by material / kg or units as appropriate	Not applicable
Net fresh water consumption / m ³	0
Power output of equipment / kW	24.5
Characteristic performance, e.g., energy efficiency, emissions, variation of performance with capacity utilization, etc. / Units as appropriate	For more details see product classification table and product description.
Further assumptions for scenario development, e.g., frequency and period of use, number of occupants / Units as appropriate	For more details see product classification table and product description.

END OF LIFE SCENARIO DOCUMENTATION

Scenario information	Value
Collection process – kg collected separately	0.616
Collection process – kg collected with mixed waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	2.49E-01
Recovery process – kg for energy recovery	0
Disposal (total) – kg for final deposition	2.53E-01
Scenario assumptions e.g. transportation	Lorry, 16-32 metric ton, EURO5; 150 km

THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15804+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.



Program assistant: Xinyuan Zhang



The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

[Verified tools](#)

Tool verifier: Hai Ha Nguyen

Tool verification validity: 28 March 2025 - 27 March 2028

APPENDIX 1

MATERIAL COMPOSITION

The product material composition is illustrated in the table below. The material weight is given in grams and in percentage on total product weight.

Table 1: Material composition

Material	Weight (g)	Weight-%
Aluminium	257.01	41.69
Copper	3.74	0.61
Other Plastics	170.44	27.65
PCB Copper	21.25	3.45
PCB Iron	22.83	3.7
PCB Support	81.93	13.29
PCB Tin	1.27	0.21
PP / PS-High Impact PS / ABS	14.0	2.27
Silica Sand	0.01	0.0
Steel	43.49	7.05
Tin	0.51	0.08

APPENDIX 2

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

In this EPD the B6 impact has been calculated using the energy mix of EU. The table in this appendix is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

If for example this EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	4.44E-01	4.75E-03	2.34E-02	4.72E-01	9.50E-04	8.13E-03	ND	ND	ND	ND	ND	4.06E-02	ND	0.00E+00	5.50E-04	2.23E-03	7.33E-04	-2.82E-02

Divide that value according to the EU value from the following table (EU = 3.30E-01) and then multiplying for the Finland value from the same table (FINLAND = 1.54E-01).

Thus, the calculation of this example would be:

New B6 GWP tot for Finland = $(4.06E-02 / 3.30E-01) \times 1.54E-01 = 1.89E-02$.

Country	GWP tot (kg CO2 eq. per kwh)		
AFRICA	7.30E-01	GERMANY	3.90E-01
APAC	9.50E-01	INDIA	1.50E+00
AUSTRALIA	8.40E-01	ITALY	3.50E-01
AUSTRIA	2.30E-01	LATAM	3.90E-01
BELGIUM	2.00E-01	NAM	4.50E-01
CHINA	1.02E+00	NETHERLANDS	3.90E-01
DENMARK	1.60E-01	NORWAY	4.50E-02
EU	3.30E-01	ROW	7.30E-01
FINLAND	1.54E-01	SPAIN	2.10E-01
FRANCE	8.70E-02	SWEDEN	3.70E-02
		UK	2.60E-01

Source Ecoinvent 3.10.1

APPENDIX 3 - EPD HUB ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family.

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table 1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

The following list of product configurations is not exhaustive. Please use the formula defined in point 1 above to calculate the exact power scaling factor (PSF) for any specific configuration.

Table 2: GWP per scaling factor (EPD Hub aligned)

	12NC or Product Family Code	Description	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	ST333T	ST333T LED20S 827 MB PSU	2200	17.6	125.0	0.718	0.718	0.538	0.538	0.395	578.7	433.6	433.6	318.4
2	ST333T	ST333T LED20S 827 MB DIA	2200	18.6	118.3	0.759	0.759	0.569	0.569	0.417	611.8	458.6	458.6	336.1
3	ST333T	ST333T LED20S 827 MB DIA-VLC	2200	19.2	114.6	0.784	0.784	0.588	0.588	0.431	631.9	473.9	473.9	347.4
4	ST333T	ST333T LED20S 827 MB WIA	2200	19.4	113.4	0.792	0.792	0.594	0.594	0.436	638.4	478.8	478.8	351.4
5	ST333T	ST333T LED20S 830 MB PSU	2200	17.6	125.0	0.718	0.718	0.538	0.538	0.395	578.7	433.6	433.6	318.4
6	ST333T	ST333T LED20S 830 MB DIA	2200	18.6	118.3	0.759	0.759	0.569	0.569	0.417	611.8	458.6	458.6	336.1
7	ST333T	ST333T LED20S 830 MB DIA-VLC	2200	19.2	114.6	0.784	0.784	0.588	0.588	0.431	631.9	473.9	473.9	347.4
8	ST333T	ST333T LED20S 830 MB WIA	2200	19.4	113.4	0.792	0.792	0.594	0.594	0.436	638.4	478.8	478.8	351.4
9	ST333T	ST333T LED20S 840 MB PSU	2300	17.6	130.7	0.718	0.718	0.538	0.538	0.395	578.7	433.6	433.6	318.4
10	ST333T	ST333T LED20S 840 MB DIA	2300	18.6	123.7	0.759	0.759	0.569	0.569	0.417	611.8	458.6	458.6	336.1

11	ST333T	ST333T LED20S 840 MB DIA-VLC	2300	19.2	119.8	0.784	0.784	0.588	0.588	0.431	631.9	473.9	473.9	347.4
12	ST333T	ST333T LED20S 840 MB WIA	2300	19.4	118.6	0.792	0.792	0.594	0.594	0.436	638.4	478.8	478.8	351.4
13	ST333T	ST333T LED20S PW930 MB PSU	2100	17.8	118.0	0.727	0.727	0.545	0.545	0.4	586.0	439.3	439.3	322.4
14	ST333T	ST333T LED20S PW930 MB DIA	2100	18.8	111.7	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
15	ST333T	ST333T LED20S PW930 MB DIA-VLC	2100	19.4	108.2	0.792	0.792	0.594	0.594	0.436	638.4	478.8	478.8	351.4
16	ST333T	ST333T LED20S PW930 MB WIA	2100	19.6	107.1	0.8	0.8	0.6	0.6	0.44	644.8	483.6	483.6	354.6
17	ST333T	ST333T LED20S PW940 MB PSU	2200	17.8	123.6	0.727	0.727	0.545	0.545	0.4	586.0	439.3	439.3	322.4
18	ST333T	ST333T LED20S PW940 MB DIA	2200	18.8	117.0	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
19	ST333T	ST333T LED20S PW940 MB DIA-VLC	2200	19.4	113.4	0.792	0.792	0.594	0.594	0.436	638.4	478.8	478.8	351.4
20	ST333T	ST333T LED20S PW940 MB WIA	2200	19.6	112.2	0.8	0.8	0.6	0.6	0.44	644.8	483.6	483.6	354.6
21	ST333T	ST333T LED20S PC930 MB PSU	2100	20.0	105.0	0.816	0.816	0.612	0.612	0.449	657.7	493.3	493.3	361.9
22	ST333T	ST333T LED20S PC930 MB DIA	2100	21.5	97.7	0.878	0.878	0.658	0.658	0.483	707.7	530.3	530.3	389.3
23	ST333T	ST333T LED20S PC930 MB DIA-VLC	2100	22.0	95.5	0.898	0.898	0.673	0.673	0.494	723.8	542.4	542.4	398.2
24	ST333T	ST333T LED20S PC930 MB WIA	2100	22.0	95.5	0.898	0.898	0.673	0.673	0.494	723.8	542.4	542.4	398.2

25	ST333T	ST333T LED19S FMT MB PSU	1900	26.0	73.1	1.061	1.061	0.796	0.796	0.584	855.2	641.6	641.6	470.7
26	ST333T	ST333T LED19S FMT MB DIA	1900	24.5	77.6	1.0	1.0	0.75	0.75	0.55	806.0	604.5	604.5	443.3
27	ST333T	ST333T LED19S FMT MB DIA-VLC	1900	25.5	74.5	1.041	1.041	0.781	0.781	0.573	839.0	629.5	629.5	461.8
28	ST333T	ST333T LED19S FMT MB WIA	1900	25.5	74.5	1.041	1.041	0.781	0.781	0.573	839.0	629.5	629.5	461.8
29	ST333T	ST333T LED19S ROSE MB PSU	1900	19.8	96.0	0.808	0.808	0.606	0.606	0.444	651.2	488.4	488.4	357.9
30	ST333T	ST333T LED19S ROSE MB DIA	1900	19.4	97.9	0.792	0.792	0.594	0.594	0.436	638.4	478.8	478.8	351.4
31	ST333T	ST333T LED19S ROSE MB DIA-VLC	1900	19.8	96.0	0.808	0.808	0.606	0.606	0.444	651.2	488.4	488.4	357.9
32	ST333T	ST333T LED19S ROSE MB WIA	1900	20.0	95.0	0.816	0.816	0.612	0.612	0.449	657.7	493.3	493.3	361.9
33	ST333T	ST333T LED27S 827 MB PSU	2800	21.0	133.3	0.857	0.857	0.643	0.643	0.471	690.7	518.3	518.3	379.6
34	ST333T	ST333T LED27S 827 MB DIA	2800	22.0	127.3	0.898	0.898	0.673	0.673	0.494	723.8	542.4	542.4	398.2
35	ST333T	ST333T LED27S 827 MB DIA-VLC	2800	22.5	124.4	0.918	0.918	0.689	0.689	0.505	739.9	555.3	555.3	407.0
36	ST333T	ST333T LED27S 827 MB WIA	2800	23.0	121.7	0.939	0.939	0.704	0.704	0.516	756.8	567.4	567.4	415.9
37	ST333T	ST333T LED27S 830 MB PSU	2700	18.8	143.6	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
38	ST333T	ST333T LED27S 830 MB DIA	2700	19.6	137.8	0.8	0.8	0.6	0.6	0.44	644.8	483.6	483.6	354.6

39	ST333T	ST333T LED27S 830 MB DIA-VLC	2700	20.5	131.7	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
40	ST333T	ST333T LED27S 830 MB WIA	2700	20.5	131.7	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
41	ST333T	ST333T LED27S 840 MB PSU	2800	18.8	148.9	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
42	ST333T	ST333T LED27S 840 MB DIA	2800	19.6	142.9	0.8	0.8	0.6	0.6	0.44	644.8	483.6	483.6	354.6
43	ST333T	ST333T LED27S 840 MB DIA-VLC	2800	20.5	136.6	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
44	ST333T	ST333T LED27S 840 MB WIA	2800	20.5	136.6	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
45	ST333T	ST333T LED27S PW930 MB PSU	2800	21.0	133.3	0.857	0.857	0.643	0.643	0.471	690.7	518.3	518.3	379.6
46	ST333T	ST333T LED27S PW930 MB DIA	2800	22.0	127.3	0.898	0.898	0.673	0.673	0.494	723.8	542.4	542.4	398.2
47	ST333T	ST333T LED27S PW930 MB DIA-VLC	2800	22.5	124.4	0.918	0.918	0.689	0.689	0.505	739.9	555.3	555.3	407.0
48	ST333T	ST333T LED27S PW930 MB WIA	2800	23.0	121.7	0.939	0.939	0.704	0.704	0.516	756.8	567.4	567.4	415.9
49	ST333T	ST333T LED27S PW940 MB PSU	2700	18.8	143.6	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
50	ST333T	ST333T LED27S PW940 MB DIA	2700	19.6	137.8	0.8	0.8	0.6	0.6	0.44	644.8	483.6	483.6	354.6
51	ST333T	ST333T LED27S PW940 MB DIA-VLC	2700	20.5	131.7	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
52	ST333T	ST333T LED27S PW940 MB WIA	2700	20.5	131.7	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8

53	ST333T	ST333T LED27S PC930 MB PSU	2700	23.0	117.4	0.939	0.939	0.704	0.704	0.516	756.8	567.4	567.4	415.9
54	ST333T	ST333T LED27S PC930 MB DIA	2700	24.0	112.5	0.98	0.98	0.735	0.735	0.539	789.9	592.4	592.4	434.4
55	ST333T	ST333T LED27S PC930 MB DIA-VLC	2700	25.0	108.0	1.02	1.02	0.765	0.765	0.561	822.1	616.6	616.6	452.2
56	ST333T	ST333T LED27S PC930 MB WIA	2700	25.0	108.0	1.02	1.02	0.765	0.765	0.561	822.1	616.6	616.6	452.2
57	ST333T	ST333T LED27S CH MB PSU	2800	21.0	133.3	0.857	0.857	0.643	0.643	0.471	690.7	518.3	518.3	379.6
58	ST333T	ST333T LED27S CH MB DIA	2800	22.0	127.3	0.898	0.898	0.673	0.673	0.494	723.8	542.4	542.4	398.2
59	ST333T	ST333T LED27S CH MB DIA-VLC	2800	22.5	124.4	0.918	0.918	0.689	0.689	0.505	739.9	555.3	555.3	407.0
60	ST333T	ST333T LED27S CH MB WIA	2800	23.0	121.7	0.939	0.939	0.704	0.704	0.516	756.8	567.4	567.4	415.9
61	ST333T	ST333T LED39S 827 MB PSU	4000	30.0	133.3	1.224	1.224	0.918	0.918	0.673	986.5	739.9	739.9	542.4
62	ST333T	ST333T LED39S 827 MB DIA	4000	31.0	129.0	1.265	1.265	0.949	0.949	0.696	1019.6	764.9	764.9	561.0
63	ST333T	ST333T LED39S 827 MB DIA-VLC	4000	32.5	123.1	1.327	1.327	0.995	0.995	0.73	1069.6	802.0	802.0	588.4
64	ST333T	ST333T LED39S 827 MB WIA	4000	31.5	127.0	1.286	1.286	0.965	0.965	0.707	1036.5	777.8	777.8	569.8
65	ST333T	ST333T LED39S 830 MB PSU	4000	28.0	142.9	1.143	1.143	0.857	0.857	0.629	921.3	690.7	690.7	507.0
66	ST333T	ST333T LED39S 830 MB DIA	4000	29.0	137.9	1.184	1.184	0.888	0.888	0.651	954.3	715.7	715.7	524.7

67	ST333T	ST333T LED39S 830 MB DIA-VLC	4000	30.0	133.3	1.224	1.224	0.918	0.918	0.673	986.5	739.9	739.9	542.4
68	ST333T	ST333T LED39S 830 MB WIA	4000	29.5	135.6	1.204	1.204	0.903	0.903	0.662	970.4	727.8	727.8	533.6
69	ST333T	ST333T LED39S 840 MB PSU	4100	28.0	146.4	1.143	1.143	0.857	0.857	0.629	921.3	690.7	690.7	507.0
70	ST333T	ST333T LED39S 840 MB DIA	4100	29.0	141.4	1.184	1.184	0.888	0.888	0.651	954.3	715.7	715.7	524.7
71	ST333T	ST333T LED39S 840 MB DIA-VLC	4100	30.0	136.7	1.224	1.224	0.918	0.918	0.673	986.5	739.9	739.9	542.4
72	ST333T	ST333T LED39S 840 MB WIA	4100	30.0	136.7	1.224	1.224	0.918	0.918	0.673	986.5	739.9	739.9	542.4
73	ST333T	ST333T LED39S PW930 MB PSU	4000	30.0	133.3	1.224	1.224	0.918	0.918	0.673	986.5	739.9	739.9	542.4
74	ST333T	ST333T LED39S PW930 MB DIA	4000	31.0	129.0	1.265	1.265	0.949	0.949	0.696	1019.6	764.9	764.9	561.0
75	ST333T	ST333T LED39S PW930 MB DIA-VLC	4000	32.5	123.1	1.327	1.327	0.995	0.995	0.73	1069.6	802.0	802.0	588.4
76	ST333T	ST333T LED39S PW930 MB WIA	4000	31.5	127.0	1.286	1.286	0.965	0.965	0.707	1036.5	777.8	777.8	569.8
77	ST333T	ST333T LED39S PW940 MB PSU	4000	28.0	142.9	1.143	1.143	0.857	0.857	0.629	921.3	690.7	690.7	507.0
78	ST333T	ST333T LED39S PW940 MB DIA	4000	29.0	137.9	1.184	1.184	0.888	0.888	0.651	954.3	715.7	715.7	524.7
79	ST333T	ST333T LED39S PW940 MB DIA-VLC	4000	30.0	133.3	1.224	1.224	0.918	0.918	0.673	986.5	739.9	739.9	542.4
80	ST333T	ST333T LED39S PW940 MB WIA	4000	29.5	135.6	1.204	1.204	0.903	0.903	0.662	970.4	727.8	727.8	533.6

81	ST333T	ST333T LED20S 827 HMB PSU	2200	17.6	125.0	0.718	0.718	0.538	0.538	0.395	578.7	433.6	433.6	318.4
82	ST333T	ST333T LED20S 827 HMB DIA	2200	18.6	118.3	0.759	0.759	0.569	0.569	0.417	611.8	458.6	458.6	336.1
83	ST333T	ST333T LED20S 827 HMB DIA-VLC	2200	19.2	114.6	0.784	0.784	0.588	0.588	0.431	631.9	473.9	473.9	347.4
84	ST333T	ST333T LED20S 827 HMB WIA	2200	19.4	113.4	0.792	0.792	0.594	0.594	0.436	638.4	478.8	478.8	351.4
85	ST333T	ST333T LED20S 830 HMB PSU	2300	17.6	130.7	0.718	0.718	0.538	0.538	0.395	578.7	433.6	433.6	318.4
86	ST333T	ST333T LED20S 830 HMB DIA	2300	18.6	123.7	0.759	0.759	0.569	0.569	0.417	611.8	458.6	458.6	336.1
87	ST333T	ST333T LED20S 830 HMB DIA-VLC	2300	19.2	119.8	0.784	0.784	0.588	0.588	0.431	631.9	473.9	473.9	347.4
88	ST333T	ST333T LED20S 830 HMB WIA	2300	19.4	118.6	0.792	0.792	0.594	0.594	0.436	638.4	478.8	478.8	351.4
89	ST333T	ST333T LED20S 840 HMB PSU	2000	14.4	138.9	0.588	0.588	0.441	0.441	0.323	473.9	355.4	355.4	260.3
90	ST333T	ST333T LED20S 840 HMB DIA	2000	14.2	140.8	0.58	0.58	0.435	0.435	0.319	467.5	350.6	350.6	257.1
91	ST333T	ST333T LED20S 840 HMB DIA-VLC	2000	14.6	137.0	0.596	0.596	0.447	0.447	0.328	480.4	360.3	360.3	264.4
92	ST333T	ST333T LED20S 840 HMB WIA	2000	14.8	135.1	0.604	0.604	0.453	0.453	0.332	486.8	365.1	365.1	267.6
93	ST333T	ST333T LED20S PW930 HMB PSU	2200	17.8	123.6	0.727	0.727	0.545	0.545	0.4	586.0	439.3	439.3	322.4
94	ST333T	ST333T LED20S PW930 HMB DIA	2200	20.5	107.3	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8

95	ST333T	ST333T LED20S PW930 HMB DIA-VLC	2200	19.4	113.4	0.792	0.792	0.594	0.594	0.436	638.4	478.8	478.8	351.4
96	ST333T	ST333T LED20S PW930 HMB WIA	2200	20.5	107.3	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
97	ST333T	ST333T LED20S PW940 HMB PSU	2300	17.8	129.2	0.727	0.727	0.545	0.545	0.4	586.0	439.3	439.3	322.4
98	ST333T	ST333T LED20S PW940 HMB DIA	2300	18.8	122.3	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
99	ST333T	ST333T LED20S PW940 HMB DIA-VLC	2300	19.4	118.6	0.792	0.792	0.594	0.594	0.436	638.4	478.8	478.8	351.4
100	ST333T	ST333T LED20S PW940 HMB WIA	2300	19.6	117.3	0.8	0.8	0.6	0.6	0.44	644.8	483.6	483.6	354.6
101	ST333T	ST333T LED20S PC930 HMB PSU	2100	20.0	105.0	0.816	0.816	0.612	0.612	0.449	657.7	493.3	493.3	361.9
102	ST333T	ST333T LED20S PC930 HMB DIA	2100	21.5	97.7	0.878	0.878	0.658	0.658	0.483	707.7	530.3	530.3	389.3
103	ST333T	ST333T LED20S PC930 HMB DIA-VLC	2100	22.0	95.5	0.898	0.898	0.673	0.673	0.494	723.8	542.4	542.4	398.2
104	ST333T	ST333T LED20S PC930 HMB WIA	2100	22.0	95.5	0.898	0.898	0.673	0.673	0.494	723.8	542.4	542.4	398.2
105	ST333T	ST333T LED19S FMT HMB PSU	1950	24.0	81.2	0.98	0.98	0.735	0.735	0.539	789.9	592.4	592.4	434.4
106	ST333T	ST333T LED19S FMT HMB DIA	1950	26.5	73.6	1.082	1.082	0.812	0.812	0.595	872.1	654.5	654.5	479.6
107	ST333T	ST333T LED19S FMT HMB DIA-VLC	1950	26.0	75.0	1.061	1.061	0.796	0.796	0.584	855.2	641.6	641.6	470.7
108	ST333T	ST333T LED19S FMT HMB WIA	1950	26.5	73.6	1.082	1.082	0.812	0.812	0.595	872.1	654.5	654.5	479.6

109	ST333T	ST333T LED19S ROSE HMB PSU	1900	18.4	103.3	0.751	0.751	0.563	0.563	0.413	605.3	453.8	453.8	332.9
110	ST333T	ST333T LED19S ROSE HMB DIA	1900	21.0	90.5	0.857	0.857	0.643	0.643	0.471	690.7	518.3	518.3	379.6
111	ST333T	ST333T LED19S ROSE HMB DIA-VLC	1900	20.0	95.0	0.816	0.816	0.612	0.612	0.449	657.7	493.3	493.3	361.9
112	ST333T	ST333T LED19S ROSE HMB WIA	1900	21.0	90.5	0.857	0.857	0.643	0.643	0.471	690.7	518.3	518.3	379.6
113	ST333T	ST333T LED27S 827 HMB PSU	2700	18.8	143.6	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
114	ST333T	ST333T LED27S 827 HMB DIA	2700	21.0	128.6	0.857	0.857	0.643	0.643	0.471	690.7	518.3	518.3	379.6
115	ST333T	ST333T LED27S 827 HMB DIA-VLC	2700	20.5	131.7	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
116	ST333T	ST333T LED27S 827 HMB WIA	2700	21.5	125.6	0.878	0.878	0.658	0.658	0.483	707.7	530.3	530.3	389.3
117	ST333T	ST333T LED27S 830 HMB PSU	2800	18.8	148.9	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
118	ST333T	ST333T LED27S 830 HMB DIA	2800	21.0	133.3	0.857	0.857	0.643	0.643	0.471	690.7	518.3	518.3	379.6
119	ST333T	ST333T LED27S 830 HMB DIA-VLC	2800	20.5	136.6	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
120	ST333T	ST333T LED27S 830 HMB WIA	2800	21.5	130.2	0.878	0.878	0.658	0.658	0.483	707.7	530.3	530.3	389.3
121	ST333T	ST333T LED27S 840 HMB PSU	2900	18.8	154.3	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
122	ST333T	ST333T LED27S 840 HMB DIA	2900	21.0	138.1	0.857	0.857	0.643	0.643	0.471	690.7	518.3	518.3	379.6

123	ST333T	ST333T LED27S 840 HMB DIA-VLC	2900	20.5	141.5	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
124	ST333T	ST333T LED27S 840 HMB WIA	2900	21.5	134.9	0.878	0.878	0.658	0.658	0.483	707.7	530.3	530.3	389.3
125	ST333T	ST333T LED27S PW930 HMB PSU	2900	21.0	138.1	0.857	0.857	0.643	0.643	0.471	690.7	518.3	518.3	379.6
126	ST333T	ST333T LED27S PW930 HMB DIA	2900	22.0	131.8	0.898	0.898	0.673	0.673	0.494	723.8	542.4	542.4	398.2
127	ST333T	ST333T LED27S PW930 HMB DIA-VLC	2900	22.5	128.9	0.918	0.918	0.689	0.689	0.505	739.9	555.3	555.3	407.0
128	ST333T	ST333T LED27S PW930 HMB WIA	2900	23.0	126.1	0.939	0.939	0.704	0.704	0.516	756.8	567.4	567.4	415.9
129	ST333T	ST333T LED27S PW940 HMB PSU	2800	18.8	148.9	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
130	ST333T	ST333T LED27S PW940 HMB DIA	2800	19.6	142.9	0.8	0.8	0.6	0.6	0.44	644.8	483.6	483.6	354.6
131	ST333T	ST333T LED27S PW940 HMB DIA-VLC	2800	20.5	136.6	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
132	ST333T	ST333T LED27S PW940 HMB WIA	2800	20.5	136.6	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
133	ST333T	ST333T LED27S PW930 UHE HMB PSU	2700	17.4	155.2	0.71	0.71	0.532	0.532	0.391	572.3	428.8	428.8	315.1
134	ST333T	ST333T LED27S PW930 UHE HMB DIA	2700	20.0	135.0	0.816	0.816	0.612	0.612	0.449	657.7	493.3	493.3	361.9
135	ST333T	ST333T LED27S PW930 UHE HMB DIA-VLC	2700	18.8	143.6	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
136	ST333T	ST333T LED27S PW930 UHE HMB WIA	2700	19.0	142.1	0.776	0.776	0.582	0.582	0.427	625.5	469.1	469.1	344.2

137	ST333T	ST333T LED27S PW940 UHE HMB PSU	2800	17.4	160.9	0.71	0.71	0.532	0.532	0.391	572.3	428.8	428.8	315.1
138	ST333T	ST333T LED27S PW940 UHE HMB DIA	2800	20.0	140.0	0.816	0.816	0.612	0.612	0.449	657.7	493.3	493.3	361.9
139	ST333T	ST333T LED27S PW940 UHE HMB DIA-VLC	2800	18.8	148.9	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
140	ST333T	ST333T LED27S PW940 UHE HMB WIA	2800	19.0	147.4	0.776	0.776	0.582	0.582	0.427	625.5	469.1	469.1	344.2
141	ST333T	ST333T LED27S PC930 HMB PSU	2800	23.0	121.7	0.939	0.939	0.704	0.704	0.516	756.8	567.4	567.4	415.9
142	ST333T	ST333T LED27S PC930 HMB DIA	2800	26.0	107.7	1.061	1.061	0.796	0.796	0.584	855.2	641.6	641.6	470.7
143	ST333T	ST333T LED27S PC930 HMB DIA-VLC	2800	25.0	112.0	1.02	1.02	0.765	0.765	0.561	822.1	616.6	616.6	452.2
144	ST333T	ST333T LED27S PC930 HMB WIA	2800	25.5	109.8	1.041	1.041	0.781	0.781	0.573	839.0	629.5	629.5	461.8
145	ST333T	ST333T LED27S CH HMB PSU	2700	18.8	143.6	0.767	0.767	0.575	0.575	0.422	618.2	463.4	463.4	340.1
146	ST333T	ST333T LED27S CH HMB DIA	2700	21.0	128.6	0.857	0.857	0.643	0.643	0.471	690.7	518.3	518.3	379.6
147	ST333T	ST333T LED27S CH HMB DIA-VLC	2700	20.5	131.7	0.837	0.837	0.628	0.628	0.46	674.6	506.2	506.2	370.8
148	ST333T	ST333T LED27S CH HMB WIA	2700	21.5	125.6	0.878	0.878	0.658	0.658	0.483	707.7	530.3	530.3	389.3
149	ST333T	ST333T LED39S 827 HMB PSU	3900	28.0	139.3	1.143	1.143	0.857	0.857	0.629	921.3	690.7	690.7	507.0
150	ST333T	ST333T LED39S 827 HMB DIA	3900	30.5	127.9	1.245	1.245	0.934	0.934	0.685	1003.5	752.8	752.8	552.1

151	ST333T	ST333T LED39S 827 HMB DIA-VLC	3900	30.0	130.0	1.224	1.224	0.918	0.918	0.673	986.5	739.9	739.9	542.4
152	ST333T	ST333T LED39S 827 HMB WIA	3900	31.0	125.8	1.265	1.265	0.949	0.949	0.696	1019.6	764.9	764.9	561.0
153	ST333T	ST333T LED39S 830 HMB PSU	4100	28.0	146.4	1.143	1.143	0.857	0.857	0.629	921.3	690.7	690.7	507.0
154	ST333T	ST333T LED39S 830 HMB DIA	4100	30.5	134.4	1.245	1.245	0.934	0.934	0.685	1003.5	752.8	752.8	552.1
155	ST333T	ST333T LED39S 830 HMB DIA-VLC	4100	30.0	136.7	1.224	1.224	0.918	0.918	0.673	986.5	739.9	739.9	542.4
156	ST333T	ST333T LED39S 830 HMB WIA	4100	31.0	132.3	1.265	1.265	0.949	0.949	0.696	1019.6	764.9	764.9	561.0
157	ST333T	ST333T LED39S 840 HMB PSU	4200	28.0	150.0	1.143	1.143	0.857	0.857	0.629	921.3	690.7	690.7	507.0
158	ST333T	ST333T LED39S 840 HMB DIA	4200	30.5	137.7	1.245	1.245	0.934	0.934	0.685	1003.5	752.8	752.8	552.1
159	ST333T	ST333T LED39S 840 HMB DIA-VLC	4200	30.0	140.0	1.224	1.224	0.918	0.918	0.673	986.5	739.9	739.9	542.4
160	ST333T	ST333T LED39S 840 HMB WIA	4200	31.0	135.5	1.265	1.265	0.949	0.949	0.696	1019.6	764.9	764.9	561.0
161	ST333T	ST333T LED39S PW930 HMB PSU	3900	28.0	139.3	1.143	1.143	0.857	0.857	0.629	921.3	690.7	690.7	507.0
162	ST333T	ST333T LED39S PW930 HMB DIA	3900	29.0	134.5	1.184	1.184	0.888	0.888	0.651	954.3	715.7	715.7	524.7
163	ST333T	ST333T LED39S PW930 HMB DIA-VLC	3900	30.0	130.0	1.224	1.224	0.918	0.918	0.673	986.5	739.9	739.9	542.4
164	ST333T	ST333T LED39S PW930 HMB WIA	3900	29.5	132.2	1.204	1.204	0.903	0.903	0.662	970.4	727.8	727.8	533.6

165	ST333T	ST333T LED39S PW940 HMB PSU	3900	26.0	150.0	1.061	1.061	0.796	0.796	0.584	855.2	641.6	641.6	470.7
166	ST333T	ST333T LED39S PW940 HMB DIA	3900	26.5	147.2	1.082	1.082	0.812	0.812	0.595	872.1	654.5	654.5	479.6
167	ST333T	ST333T LED39S PW940 HMB DIA-VLC	3900	28.0	139.3	1.143	1.143	0.857	0.857	0.629	921.3	690.7	690.7	507.0
168	ST333T	ST333T LED39S PW940 HMB WIA	3900	27.5	141.8	1.122	1.122	0.842	0.842	0.617	904.3	678.7	678.7	497.3
169	ST333T	<u>ST333T LED39S PW930 UHE HMB PSU</u>	3900	24.5	159.2	1.0	1.0	0.75	0.75	0.55	806.0	604.5	604.5	443.3
170	ST333T	ST333T LED39S PW930 UHE HMB DIA	3900	27.0	144.4	1.102	1.102	0.827	0.827	0.606	888.2	666.6	666.6	488.4
171	ST333T	ST333T LED39S PW930 UHE HMB DIA-VLC	3900	26.5	147.2	1.082	1.082	0.812	0.812	0.595	872.1	654.5	654.5	479.6
172	ST333T	ST333T LED39S PW930 UHE HMB WIA	3900	27.5	141.8	1.122	1.122	0.842	0.842	0.617	904.3	678.7	678.7	497.3
173	ST333T	ST333T LED39S PW940 UHE HMB PSU	4000	24.5	163.3	1.0	1.0	0.75	0.75	0.55	806.0	604.5	604.5	443.3
174	ST333T	ST333T LED39S PW940 UHE HMB DIA	4000	27.0	148.1	1.102	1.102	0.827	0.827	0.606	888.2	666.6	666.6	488.4
175	ST333T	ST333T LED39S PW940 UHE HMB DIA-VLC	4000	26.5	150.9	1.082	1.082	0.812	0.812	0.595	872.1	654.5	654.5	479.6
176	ST333T	ST333T LED39S PW940 UHE HMB WIA	4000	27.5	145.5	1.122	1.122	0.842	0.842	0.617	904.3	678.7	678.7	497.3

PEP ECOPASSPORT ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ($PGSF$), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

- Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table 3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

- Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

Table 4: Impact per scaling factor (PEP EcoPassport aligned)

	12NC or Product Family Code	Description	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	ST333T	ST333T LED20S 827 MB PSU	2200	17.6	125.0	0.718	0.114	0.086	0.086	0.063	91.9	69.3	69.3	50.8
2	ST333T	ST333T LED20S 827 MB DIA	2200	18.6	118.3	0.759	0.121	0.091	0.091	0.067	97.5	73.3	73.3	54.0
3	ST333T	ST333T LED20S 827 MB DIA-VLC	2200	19.2	114.6	0.784	0.125	0.094	0.094	0.069	100.8	75.8	75.8	55.6
4	ST333T	ST333T LED20S 827 MB WIA	2200	19.4	113.4	0.792	0.126	0.095	0.095	0.069	101.6	76.6	76.6	55.6
5	ST333T	ST333T LED20S 830 MB PSU	2200	17.6	125.0	0.718	0.114	0.086	0.086	0.063	91.9	69.3	69.3	50.8
6	ST333T	ST333T LED20S 830 MB DIA	2200	18.6	118.3	0.759	0.121	0.091	0.091	0.067	97.5	73.3	73.3	54.0
7	ST333T	ST333T LED20S 830 MB DIA-VLC	2200	19.2	114.6	0.784	0.125	0.094	0.094	0.069	100.8	75.8	75.8	55.6
8	ST333T	ST333T LED20S 830 MB WIA	2200	19.4	113.4	0.792	0.126	0.095	0.095	0.069	101.6	76.6	76.6	55.6
9	ST333T	ST333T LED20S 840 MB PSU	2300	17.6	130.7	0.718	0.109	0.082	0.082	0.06	87.9	66.1	66.1	48.4
10	ST333T	ST333T LED20S 840 MB DIA	2300	18.6	123.7	0.759	0.115	0.086	0.086	0.063	92.7	69.3	69.3	50.8
11	ST333T	ST333T LED20S 840 MB DIA-VLC	2300	19.2	119.8	0.784	0.119	0.089	0.089	0.065	95.9	71.7	71.7	52.4
12	ST333T	ST333T LED20S 840 MB WIA	2300	19.4	118.6	0.792	0.12	0.09	0.09	0.066	96.7	72.5	72.5	53.2

13	ST333T	ST333T LED20S PW930 MB PSU	2100	17.8	118.0	0.727	0.121	0.091	0.091	0.067	97.5	73.3	73.3	54.0
14	ST333T	ST333T LED20S PW930 MB DIA	2100	18.8	111.7	0.767	0.128	0.096	0.096	0.07	103.2	77.4	77.4	56.4
15	ST333T	ST333T LED20S PW930 MB DIA-VLC	2100	19.4	108.2	0.792	0.132	0.099	0.099	0.073	106.4	79.8	79.8	58.8
16	ST333T	ST333T LED20S PW930 MB WIA	2100	19.6	107.1	0.8	0.134	0.101	0.101	0.074	108.0	81.4	81.4	59.6
17	ST333T	ST333T LED20S PW940 MB PSU	2200	17.8	123.6	0.727	0.116	0.087	0.087	0.064	93.5	70.1	70.1	51.6
18	ST333T	ST333T LED20S PW940 MB DIA	2200	18.8	117.0	0.767	0.122	0.091	0.091	0.067	98.3	73.3	73.3	54.0
19	ST333T	ST333T LED20S PW940 MB DIA-VLC	2200	19.4	113.4	0.792	0.126	0.095	0.095	0.069	101.6	76.6	76.6	55.6
20	ST333T	ST333T LED20S PW940 MB WIA	2200	19.6	112.2	0.8	0.127	0.095	0.095	0.07	102.4	76.6	76.6	56.4
21	ST333T	ST333T LED20S PC930 MB PSU	2100	20.0	105.0	0.816	0.136	0.102	0.102	0.075	109.6	82.2	82.2	60.4
22	ST333T	ST333T LED20S PC930 MB DIA	2100	21.5	97.7	0.878	0.147	0.11	0.11	0.081	118.5	88.7	88.7	65.3
23	ST333T	ST333T LED20S PC930 MB DIA-VLC	2100	22.0	95.5	0.898	0.15	0.112	0.112	0.083	120.9	90.3	90.3	66.9
24	ST333T	ST333T LED20S PC930 MB WIA	2100	22.0	95.5	0.898	0.15	0.112	0.112	0.083	120.9	90.3	90.3	66.9
25	ST333T	ST333T LED19S FMT MB PSU	1900	26.0	73.1	1.061	0.195	0.146	0.146	0.107	157.2	117.7	117.7	86.2
26	ST333T	ST333T LED19S FMT MB DIA	1900	24.5	77.6	1.0	0.184	0.138	0.138	0.101	148.3	111.2	111.2	81.4

27	ST333T	ST333T LED19S FMT MB DIA-VLC	1900	25.5	74.5	1.041	0.192	0.144	0.144	0.106	154.8	116.1	116.1	85.4
28	ST333T	ST333T LED19S FMT MB WIA	1900	25.5	74.5	1.041	0.192	0.144	0.144	0.106	154.8	116.1	116.1	85.4
29	ST333T	ST333T LED19S ROSE MB PSU	1900	19.8	96.0	0.808	0.149	0.112	0.112	0.082	120.1	90.3	90.3	66.1
30	ST333T	ST333T LED19S ROSE MB DIA	1900	19.4	97.9	0.792	0.146	0.109	0.109	0.08	117.7	87.9	87.9	64.5
31	ST333T	ST333T LED19S ROSE MB DIA-VLC	1900	19.8	96.0	0.808	0.149	0.112	0.112	0.082	120.1	90.3	90.3	66.1
32	ST333T	ST333T LED19S ROSE MB WIA	1900	20.0	95.0	0.816	0.15	0.112	0.112	0.083	120.9	90.3	90.3	66.9
33	ST333T	ST333T LED27S 827 MB PSU	2800	21.0	133.3	0.857	0.107	0.08	0.08	0.059	86.2	64.5	64.5	47.6
34	ST333T	ST333T LED27S 827 MB DIA	2800	22.0	127.3	0.898	0.112	0.084	0.084	0.062	90.3	67.7	67.7	50.0
35	ST333T	ST333T LED27S 827 MB DIA-VLC	2800	22.5	124.4	0.918	0.115	0.086	0.086	0.063	92.7	69.3	69.3	50.8
36	ST333T	ST333T LED27S 827 MB WIA	2800	23.0	121.7	0.939	0.117	0.088	0.088	0.064	94.3	70.9	70.9	51.6
37	ST333T	ST333T LED27S 830 MB PSU	2700	18.8	143.6	0.767	0.1	0.075	0.075	0.055	80.6	60.4	60.4	44.3
38	ST333T	ST333T LED27S 830 MB DIA	2700	19.6	137.8	0.8	0.104	0.078	0.078	0.057	83.8	62.9	62.9	45.9
39	ST333T	ST333T LED27S 830 MB DIA-VLC	2700	20.5	131.7	0.837	0.109	0.082	0.082	0.06	87.9	66.1	66.1	48.4
40	ST333T	ST333T LED27S 830 MB WIA	2700	20.5	131.7	0.837	0.109	0.082	0.082	0.06	87.9	66.1	66.1	48.4

41	ST333T	ST333T LED27S 840 MB PSU	2800	18.8	148.9	0.767	0.096	0.072	0.072	0.053	77.4	58.0	58.0	42.7
42	ST333T	ST333T LED27S 840 MB DIA	2800	19.6	142.9	0.8	0.1	0.075	0.075	0.055	80.6	60.4	60.4	44.3
43	ST333T	ST333T LED27S 840 MB DIA-VLC	2800	20.5	136.6	0.837	0.105	0.079	0.079	0.058	84.6	63.7	63.7	46.7
44	ST333T	ST333T LED27S 840 MB WIA	2800	20.5	136.6	0.837	0.105	0.079	0.079	0.058	84.6	63.7	63.7	46.7
45	ST333T	ST333T LED27S PW930 MB PSU	2800	21.0	133.3	0.857	0.107	0.08	0.08	0.059	86.2	64.5	64.5	47.6
46	ST333T	ST333T LED27S PW930 MB DIA	2800	22.0	127.3	0.898	0.112	0.084	0.084	0.062	90.3	67.7	67.7	50.0
47	ST333T	ST333T LED27S PW930 MB DIA-VLC	2800	22.5	124.4	0.918	0.115	0.086	0.086	0.063	92.7	69.3	69.3	50.8
48	ST333T	ST333T LED27S PW930 MB WIA	2800	23.0	121.7	0.939	0.117	0.088	0.088	0.064	94.3	70.9	70.9	51.6
49	ST333T	ST333T LED27S PW940 MB PSU	2700	18.8	143.6	0.767	0.1	0.075	0.075	0.055	80.6	60.4	60.4	44.3
50	ST333T	ST333T LED27S PW940 MB DIA	2700	19.6	137.8	0.8	0.104	0.078	0.078	0.057	83.8	62.9	62.9	45.9
51	ST333T	ST333T LED27S PW940 MB DIA-VLC	2700	20.5	131.7	0.837	0.109	0.082	0.082	0.06	87.9	66.1	66.1	48.4
52	ST333T	ST333T LED27S PW940 MB WIA	2700	20.5	131.7	0.837	0.109	0.082	0.082	0.06	87.9	66.1	66.1	48.4
53	ST333T	ST333T LED27S PC930 MB PSU	2700	23.0	117.4	0.939	0.122	0.091	0.091	0.067	98.3	73.3	73.3	54.0
54	ST333T	ST333T LED27S PC930 MB DIA	2700	24.0	112.5	0.98	0.127	0.095	0.095	0.07	102.4	76.6	76.6	56.4

55	ST333T	ST333T LED27S PC930 MB DIA-VLC	2700	25.0	108.0	1.02	0.133	0.1	0.1	0.073	107.2	80.6	80.6	58.8
56	ST333T	ST333T LED27S PC930 MB WIA	2700	25.0	108.0	1.02	0.133	0.1	0.1	0.073	107.2	80.6	80.6	58.8
57	ST333T	ST333T LED27S CH MB PSU	2800	21.0	133.3	0.857	0.107	0.08	0.08	0.059	86.2	64.5	64.5	47.6
58	ST333T	ST333T LED27S CH MB DIA	2800	22.0	127.3	0.898	0.112	0.084	0.084	0.062	90.3	67.7	67.7	50.0
59	ST333T	ST333T LED27S CH MB DIA-VLC	2800	22.5	124.4	0.918	0.115	0.086	0.086	0.063	92.7	69.3	69.3	50.8
60	ST333T	ST333T LED27S CH MB WIA	2800	23.0	121.7	0.939	0.117	0.088	0.088	0.064	94.3	70.9	70.9	51.6
61	ST333T	ST333T LED39S 827 MB PSU	4000	30.0	133.3	1.224	0.106	0.08	0.08	0.058	85.4	64.5	64.5	46.7
62	ST333T	ST333T LED39S 827 MB DIA	4000	31.0	129.0	1.265	0.11	0.083	0.083	0.061	88.7	66.9	66.9	49.2
63	ST333T	ST333T LED39S 827 MB DIA-VLC	4000	32.5	123.1	1.327	0.115	0.086	0.086	0.063	92.7	69.3	69.3	50.8
64	ST333T	ST333T LED39S 827 MB WIA	4000	31.5	127.0	1.286	0.112	0.084	0.084	0.062	90.3	67.7	67.7	50.0
65	ST333T	ST333T LED39S 830 MB PSU	4000	28.0	142.9	1.143	0.099	0.074	0.074	0.054	79.8	59.6	59.6	43.5
66	ST333T	ST333T LED39S 830 MB DIA	4000	29.0	137.9	1.184	0.103	0.077	0.077	0.057	83.0	62.1	62.1	45.9
67	ST333T	ST333T LED39S 830 MB DIA-VLC	4000	30.0	133.3	1.224	0.106	0.08	0.08	0.058	85.4	64.5	64.5	46.7
68	ST333T	ST333T LED39S 830 MB WIA	4000	29.5	135.6	1.204	0.105	0.079	0.079	0.058	84.6	63.7	63.7	46.7

69	ST333T	ST333T LED39S 840 MB PSU	4100	28.0	146.4	1.143	0.097	0.073	0.073	0.053	78.2	58.8	58.8	42.7
70	ST333T	ST333T LED39S 840 MB DIA	4100	29.0	141.4	1.184	0.101	0.076	0.076	0.056	81.4	61.3	61.3	45.1
71	ST333T	ST333T LED39S 840 MB DIA-VLC	4100	30.0	136.7	1.224	0.104	0.078	0.078	0.057	83.8	62.9	62.9	45.9
72	ST333T	ST333T LED39S 840 MB WIA	4100	30.0	136.7	1.224	0.104	0.078	0.078	0.057	83.8	62.9	62.9	45.9
73	ST333T	ST333T LED39S PW930 MB PSU	4000	30.0	133.3	1.224	0.106	0.08	0.08	0.058	85.4	64.5	64.5	46.7
74	ST333T	ST333T LED39S PW930 MB DIA	4000	31.0	129.0	1.265	0.11	0.083	0.083	0.061	88.7	66.9	66.9	49.2
75	ST333T	ST333T LED39S PW930 MB DIA-VLC	4000	32.5	123.1	1.327	0.115	0.086	0.086	0.063	92.7	69.3	69.3	50.8
76	ST333T	ST333T LED39S PW930 MB WIA	4000	31.5	127.0	1.286	0.112	0.084	0.084	0.062	90.3	67.7	67.7	50.0
77	ST333T	ST333T LED39S PW940 MB PSU	4000	28.0	142.9	1.143	0.099	0.074	0.074	0.054	79.8	59.6	59.6	43.5
78	ST333T	ST333T LED39S PW940 MB DIA	4000	29.0	137.9	1.184	0.103	0.077	0.077	0.057	83.0	62.1	62.1	45.9
79	ST333T	ST333T LED39S PW940 MB DIA-VLC	4000	30.0	133.3	1.224	0.106	0.08	0.08	0.058	85.4	64.5	64.5	46.7
80	ST333T	ST333T LED39S PW940 MB WIA	4000	29.5	135.6	1.204	0.105	0.079	0.079	0.058	84.6	63.7	63.7	46.7
81	ST333T	ST333T LED20S 827 HMB PSU	2200	17.6	125.0	0.718	0.114	0.086	0.086	0.063	91.9	69.3	69.3	50.8
82	ST333T	ST333T LED20S 827 HMB DIA	2200	18.6	118.3	0.759	0.121	0.091	0.091	0.067	97.5	73.3	73.3	54.0

83	ST333T	ST333T LED20S 827 HMB DIA-VLC	2200	19.2	114.6	0.784	0.125	0.094	0.094	0.069	100.8	75.8	75.8	55.6
84	ST333T	ST333T LED20S 827 HMB WIA	2200	19.4	113.4	0.792	0.126	0.095	0.095	0.069	101.6	76.6	76.6	55.6
85	ST333T	ST333T LED20S 830 HMB PSU	2300	17.6	130.7	0.718	0.109	0.082	0.082	0.06	87.9	66.1	66.1	48.4
86	ST333T	ST333T LED20S 830 HMB DIA	2300	18.6	123.7	0.759	0.115	0.086	0.086	0.063	92.7	69.3	69.3	50.8
87	ST333T	ST333T LED20S 830 HMB DIA-VLC	2300	19.2	119.8	0.784	0.119	0.089	0.089	0.065	95.9	71.7	71.7	52.4
88	ST333T	ST333T LED20S 830 HMB WIA	2300	19.4	118.6	0.792	0.12	0.09	0.09	0.066	96.7	72.5	72.5	53.2
89	ST333T	ST333T LED20S 840 HMB PSU	2000	14.4	138.9	0.588	0.103	0.077	0.077	0.057	83.0	62.1	62.1	45.9
90	ST333T	ST333T LED20S 840 HMB DIA	2000	14.2	140.8	0.58	0.101	0.076	0.076	0.056	81.4	61.3	61.3	45.1
91	ST333T	ST333T LED20S 840 HMB DIA-VLC	2000	14.6	137.0	0.596	0.104	0.078	0.078	0.057	83.8	62.9	62.9	45.9
92	ST333T	ST333T LED20S 840 HMB WIA	2000	14.8	135.1	0.604	0.106	0.08	0.08	0.058	85.4	64.5	64.5	46.7
93	ST333T	ST333T LED20S PW930 HMB PSU	2200	17.8	123.6	0.727	0.116	0.087	0.087	0.064	93.5	70.1	70.1	51.6
94	ST333T	ST333T LED20S PW930 HMB DIA	2200	20.5	107.3	0.837	0.133	0.1	0.1	0.073	107.2	80.6	80.6	58.8
95	ST333T	ST333T LED20S PW930 HMB DIA-VLC	2200	19.4	113.4	0.792	0.126	0.095	0.095	0.069	101.6	76.6	76.6	55.6
96	ST333T	ST333T LED20S PW930 HMB WIA	2200	20.5	107.3	0.837	0.133	0.1	0.1	0.073	107.2	80.6	80.6	58.8

97	ST333T	ST333T LED20S PW940 HMB PSU	2300	17.8	129.2	0.727	0.111	0.083	0.083	0.061	89.5	66.9	66.9	49.2
98	ST333T	ST333T LED20S PW940 HMB DIA	2300	18.8	122.3	0.767	0.117	0.088	0.088	0.064	94.3	70.9	70.9	51.6
99	ST333T	ST333T LED20S PW940 HMB DIA-VLC	2300	19.4	118.6	0.792	0.12	0.09	0.09	0.066	96.7	72.5	72.5	53.2
100	ST333T	ST333T LED20S PW940 HMB WIA	2300	19.6	117.3	0.8	0.122	0.091	0.091	0.067	98.3	73.3	73.3	54.0
101	ST333T	ST333T LED20S PC930 HMB PSU	2100	20.0	105.0	0.816	0.136	0.102	0.102	0.075	109.6	82.2	82.2	60.4
102	ST333T	ST333T LED20S PC930 HMB DIA	2100	21.5	97.7	0.878	0.147	0.11	0.11	0.081	118.5	88.7	88.7	65.3
103	ST333T	ST333T LED20S PC930 HMB DIA-VLC	2100	22.0	95.5	0.898	0.15	0.112	0.112	0.083	120.9	90.3	90.3	66.9
104	ST333T	ST333T LED20S PC930 HMB WIA	2100	22.0	95.5	0.898	0.15	0.112	0.112	0.083	120.9	90.3	90.3	66.9
105	ST333T	ST333T LED19S FMT HMB PSU	1950	24.0	81.2	0.98	0.175	0.131	0.131	0.096	141.0	105.6	105.6	77.4
106	ST333T	ST333T LED19S FMT HMB DIA	1950	26.5	73.6	1.082	0.194	0.146	0.146	0.107	156.4	117.7	117.7	86.2
107	ST333T	ST333T LED19S FMT HMB DIA-VLC	1950	26.0	75.0	1.061	0.19	0.143	0.143	0.105	153.1	115.3	115.3	84.6
108	ST333T	ST333T LED19S FMT HMB WIA	1950	26.5	73.6	1.082	0.194	0.146	0.146	0.107	156.4	117.7	117.7	86.2
109	ST333T	ST333T LED19S ROSE HMB PSU	1900	18.4	103.3	0.751	0.138	0.104	0.104	0.076	111.2	83.8	83.8	61.3
110	ST333T	ST333T LED19S ROSE HMB DIA	1900	21.0	90.5	0.857	0.158	0.118	0.118	0.087	127.3	95.1	95.1	70.1

111	ST333T	ST333T LED19S ROSE HMB DIA-VLC	1900	20.0	95.0	0.816	0.15	0.112	0.112	0.083	120.9	90.3	90.3	66.9
112	ST333T	ST333T LED19S ROSE HMB WIA	1900	21.0	90.5	0.857	0.158	0.118	0.118	0.087	127.3	95.1	95.1	70.1
113	ST333T	ST333T LED27S 827 HMB PSU	2700	18.8	143.6	0.767	0.1	0.075	0.075	0.055	80.6	60.4	60.4	44.3
114	ST333T	ST333T LED27S 827 HMB DIA	2700	21.0	128.6	0.857	0.111	0.083	0.083	0.061	89.5	66.9	66.9	49.2
115	ST333T	ST333T LED27S 827 HMB DIA-VLC	2700	20.5	131.7	0.837	0.109	0.082	0.082	0.06	87.9	66.1	66.1	48.4
116	ST333T	ST333T LED27S 827 HMB WIA	2700	21.5	125.6	0.878	0.114	0.086	0.086	0.063	91.9	69.3	69.3	50.8
117	ST333T	ST333T LED27S 830 HMB PSU	2800	18.8	148.9	0.767	0.096	0.072	0.072	0.053	77.4	58.0	58.0	42.7
118	ST333T	ST333T LED27S 830 HMB DIA	2800	21.0	133.3	0.857	0.107	0.08	0.08	0.059	86.2	64.5	64.5	47.6
119	ST333T	ST333T LED27S 830 HMB DIA-VLC	2800	20.5	136.6	0.837	0.105	0.079	0.079	0.058	84.6	63.7	63.7	46.7
120	ST333T	ST333T LED27S 830 HMB WIA	2800	21.5	130.2	0.878	0.11	0.083	0.083	0.061	88.7	66.9	66.9	49.2
121	ST333T	ST333T LED27S 840 HMB PSU	2900	18.8	154.3	0.767	0.093	0.07	0.07	0.051	75.0	56.4	56.4	41.1
122	ST333T	ST333T LED27S 840 HMB DIA	2900	21.0	138.1	0.857	0.104	0.078	0.078	0.057	83.8	62.9	62.9	45.9
123	ST333T	ST333T LED27S 840 HMB DIA-VLC	2900	20.5	141.5	0.837	0.101	0.076	0.076	0.056	81.4	61.3	61.3	45.1
124	ST333T	ST333T LED27S 840 HMB WIA	2900	21.5	134.9	0.878	0.106	0.08	0.08	0.058	85.4	64.5	64.5	46.7

125	ST333T	ST333T LED27S PW930 HMB PSU	2900	21.0	138.1	0.857	0.104	0.078	0.078	0.057	83.8	62.9	62.9	45.9
126	ST333T	ST333T LED27S PW930 HMB DIA	2900	22.0	131.8	0.898	0.109	0.082	0.082	0.06	87.9	66.1	66.1	48.4
127	ST333T	ST333T LED27S PW930 HMB DIA-VLC	2900	22.5	128.9	0.918	0.111	0.083	0.083	0.061	89.5	66.9	66.9	49.2
128	ST333T	ST333T LED27S PW930 HMB WIA	2900	23.0	126.1	0.939	0.114	0.086	0.086	0.063	91.9	69.3	69.3	50.8
129	ST333T	ST333T LED27S PW940 HMB PSU	2800	18.8	148.9	0.767	0.096	0.072	0.072	0.053	77.4	58.0	58.0	42.7
130	ST333T	ST333T LED27S PW940 HMB DIA	2800	19.6	142.9	0.8	0.1	0.075	0.075	0.055	80.6	60.4	60.4	44.3
131	ST333T	ST333T LED27S PW940 HMB DIA-VLC	2800	20.5	136.6	0.837	0.105	0.079	0.079	0.058	84.6	63.7	63.7	46.7
132	ST333T	ST333T LED27S PW940 HMB WIA	2800	20.5	136.6	0.837	0.105	0.079	0.079	0.058	84.6	63.7	63.7	46.7
133	ST333T	ST333T LED27S PW930 UHE HMB PSU	2700	17.4	155.2	0.71	0.092	0.069	0.069	0.051	74.2	55.6	55.6	41.1
134	ST333T	ST333T LED27S PW930 UHE HMB DIA	2700	20.0	135.0	0.816	0.106	0.08	0.08	0.058	85.4	64.5	64.5	46.7
135	ST333T	ST333T LED27S PW930 UHE HMB DIA-VLC	2700	18.8	143.6	0.767	0.1	0.075	0.075	0.055	80.6	60.4	60.4	44.3
136	ST333T	ST333T LED27S PW930 UHE HMB WIA	2700	19.0	142.1	0.776	0.101	0.076	0.076	0.056	81.4	61.3	61.3	45.1
137	ST333T	ST333T LED27S PW940 UHE HMB PSU	2800	17.4	160.9	0.71	0.089	0.067	0.067	0.049	71.7	54.0	54.0	39.5
138	ST333T	ST333T LED27S PW940 UHE HMB DIA	2800	20.0	140.0	0.816	0.102	0.076	0.076	0.056	82.2	61.3	61.3	45.1

139	ST333T	ST333T LED27S PW940 UHE HMB DIA-VLC	2800	18.8	148.9	0.767	0.096	0.072	0.072	0.053	77.4	58.0	58.0	42.7
140	ST333T	ST333T LED27S PW940 UHE HMB WIA	2800	19.0	147.4	0.776	0.097	0.073	0.073	0.053	78.2	58.8	58.8	42.7
141	ST333T	ST333T LED27S PC930 HMB PSU	2800	23.0	121.7	0.939	0.117	0.088	0.088	0.064	94.3	70.9	70.9	51.6
142	ST333T	ST333T LED27S PC930 HMB DIA	2800	26.0	107.7	1.061	0.133	0.1	0.1	0.073	107.2	80.6	80.6	58.8
143	ST333T	ST333T LED27S PC930 HMB DIA-VLC	2800	25.0	112.0	1.02	0.128	0.096	0.096	0.07	103.2	77.4	77.4	56.4
144	ST333T	ST333T LED27S PC930 HMB WIA	2800	25.5	109.8	1.041	0.13	0.098	0.098	0.072	104.8	79.0	79.0	58.0
145	ST333T	ST333T LED27S CH HMB PSU	2700	18.8	143.6	0.767	0.1	0.075	0.075	0.055	80.6	60.4	60.4	44.3
146	ST333T	ST333T LED27S CH HMB DIA	2700	21.0	128.6	0.857	0.111	0.083	0.083	0.061	89.5	66.9	66.9	49.2
147	ST333T	ST333T LED27S CH HMB DIA-VLC	2700	20.5	131.7	0.837	0.109	0.082	0.082	0.06	87.9	66.1	66.1	48.4
148	ST333T	ST333T LED27S CH HMB WIA	2700	21.5	125.6	0.878	0.114	0.086	0.086	0.063	91.9	69.3	69.3	50.8
149	ST333T	ST333T LED39S 827 HMB PSU	3900	28.0	139.3	1.143	0.103	0.077	0.077	0.057	83.0	62.1	62.1	45.9
150	ST333T	ST333T LED39S 827 HMB DIA	3900	30.5	127.9	1.245	0.112	0.084	0.084	0.062	90.3	67.7	67.7	50.0
151	ST333T	ST333T LED39S 827 HMB DIA-VLC	3900	30.0	130.0	1.224	0.11	0.083	0.083	0.061	88.7	66.9	66.9	49.2
152	ST333T	ST333T LED39S 827 HMB WIA	3900	31.0	125.8	1.265	0.114	0.086	0.086	0.063	91.9	69.3	69.3	50.8

153	ST333T	ST333T LED39S 830 HMB PSU	4100	28.0	146.4	1.143	0.097	0.073	0.073	0.053	78.2	58.8	58.8	42.7
154	ST333T	ST333T LED39S 830 HMB DIA	4100	30.5	134.4	1.245	0.106	0.08	0.08	0.058	85.4	64.5	64.5	46.7
155	ST333T	ST333T LED39S 830 HMB DIA-VLC	4100	30.0	136.7	1.224	0.104	0.078	0.078	0.057	83.8	62.9	62.9	45.9
156	ST333T	ST333T LED39S 830 HMB WIA	4100	31.0	132.3	1.265	0.108	0.081	0.081	0.059	87.0	65.3	65.3	47.6
157	ST333T	ST333T LED39S 840 HMB PSU	4200	28.0	150.0	1.143	0.095	0.071	0.071	0.052	76.6	57.2	57.2	41.9
158	ST333T	ST333T LED39S 840 HMB DIA	4200	30.5	137.7	1.245	0.103	0.077	0.077	0.057	83.0	62.1	62.1	45.9
159	ST333T	ST333T LED39S 840 HMB DIA-VLC	4200	30.0	140.0	1.224	0.102	0.076	0.076	0.056	82.2	61.3	61.3	45.1
160	ST333T	ST333T LED39S 840 HMB WIA	4200	31.0	135.5	1.265	0.105	0.079	0.079	0.058	84.6	63.7	63.7	46.7
161	ST333T	ST333T LED39S PW930 HMB PSU	3900	28.0	139.3	1.143	0.103	0.077	0.077	0.057	83.0	62.1	62.1	45.9
162	ST333T	ST333T LED39S PW930 HMB DIA	3900	29.0	134.5	1.184	0.107	0.08	0.08	0.059	86.2	64.5	64.5	47.6
163	ST333T	ST333T LED39S PW930 HMB DIA-VLC	3900	30.0	130.0	1.224	0.11	0.083	0.083	0.061	88.7	66.9	66.9	49.2
164	ST333T	ST333T LED39S PW930 HMB WIA	3900	29.5	132.2	1.204	0.108	0.081	0.081	0.059	87.0	65.3	65.3	47.6
165	ST333T	ST333T LED39S PW940 HMB PSU	3900	26.0	150.0	1.061	0.095	0.071	0.071	0.052	76.6	57.2	57.2	41.9
166	ST333T	ST333T LED39S PW940 HMB DIA	3900	26.5	147.2	1.082	0.097	0.073	0.073	0.053	78.2	58.8	58.8	42.7

167	ST333T	ST333T LED39S PW940 HMB DIA-VLC	3900	28.0	139.3	1.143	0.103	0.077	0.077	0.057	83.0	62.1	62.1	45.9
168	ST333T	ST333T LED39S PW940 HMB WIA	3900	27.5	141.8	1.122	0.101	0.076	0.076	0.056	81.4	61.3	61.3	45.1
169	ST333T	<u>ST333T LED39S PW930 UHE HMB PSU</u>	3900	24.5	159.2	1.0	0.09	0.068	0.068	0.05	72.5	54.8	54.8	40.3
170	ST333T	ST333T LED39S PW930 UHE HMB DIA	3900	27.0	144.4	1.102	0.099	0.074	0.074	0.054	79.8	59.6	59.6	43.5
171	ST333T	ST333T LED39S PW930 UHE HMB DIA-VLC	3900	26.5	147.2	1.082	0.097	0.073	0.073	0.053	78.2	58.8	58.8	42.7
172	ST333T	ST333T LED39S PW930 UHE HMB WIA	3900	27.5	141.8	1.122	0.101	0.076	0.076	0.056	81.4	61.3	61.3	45.1
173	ST333T	ST333T LED39S PW940 UHE HMB PSU	4000	24.5	163.3	1.0	0.087	0.065	0.065	0.048	70.1	52.4	52.4	38.7
174	ST333T	ST333T LED39S PW940 UHE HMB DIA	4000	27.0	148.1	1.102	0.096	0.072	0.072	0.053	77.4	58.0	58.0	42.7
175	ST333T	ST333T LED39S PW940 UHE HMB DIA-VLC	4000	26.5	150.9	1.082	0.094	0.071	0.071	0.052	75.8	57.2	57.2	41.9
176	ST333T	ST333T LED39S PW940 UHE HMB WIA	4000	27.5	145.5	1.122	0.098	0.074	0.074	0.054	79.0	59.6	59.6	43.5