



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

TownTune Central Post-Top BDP260

Signify N.V.



EPD HUB, HUB-4989

Published on 22.01.2026, last updated on 22.01.2026, valid until 22.01.2031

MANUFACTURER AND SITE

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global
Place of production	VALLADOLID, SPAIN
Place(s) of raw material origin	EU, APAC
Place(s) of installation and use	EU
Period for data	Calendar Year 2023

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR version 1.2, 24 Mar 2025
Sector	Electrical product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-A5, B6, and modules C1-C4, D
EPD author	Signify / Sustainability
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD verifier	Imane Uald Lamkaddam as an authorized verifier for EPD Hub

PRODUCT SPECIFICATION

Product name	TownTune Central Post-Top BDP260
Product number / reference	912300024155 / BDP260 LED39-4S/830 DM50 CLO DDF3 62P
GTIN (Global Trade Item Number)	Not applicable
NOBB (Norwegian Building Product Database)	Not applicable
A1-A3 Specific data (%)	3.2

PRODUCT DESCRIPTION

Designed to enhance existing and scalable urban spaces, the TownTune family offers all the latest lighting innovations in terms of performance, quality of light and connectivity. The family consists of four solutions: a Central Post Top (CPT), an Asymmetric Spigot Post Top / Side Entry version (ASY), a version with an extending Lyre post top bracket (Lyre), and a Central Post Top with a Conical Comfort Bowl (CCB). Each TownTune luminaire can be customized with a choice of different shapes on top of the housing, plus there's the option to add a decorative ring, which comes in two colors (excluding CCB). Design options that enable you to create your very own lighting signature and bring a distinctive identity to districts and cities. In addition, every luminaire in the TownTune family is uniquely identifiable, thanks to the Signify Service tag app. By simply scanning a QR code, placed inside the door of the mast or directly on the luminaire, you can instantly access the configuration of the luminaire. This makes maintenance and programming operations faster and easier and enables you to create your digital library of lighting assets and spare parts. TownTune also uses the Philips LEDGINE-O lighting platform, ensuring you always have the right amount and direction of light on your street. Furthermore, thanks to being system ready (SR), TownTune is also future proof. A solution that's ready to be paired with both standalone and advanced control and lighting software applications such as Interact City.

This EPD is intended for business-to-business and/or business-to-consumer communication. Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT CLASSIFICATION

Declared operating voltage, Volt	220 to 240 V
Light source colour temperature, Kelvin	3000K
Protection index for water and dust (IP)	66
Impact resistance index (IK)	10
Luminous flux, Lumens	2546
Electrical power, Watt	30
Luminous efficiency, Lm/W	85
Additional characteristic	Not applicable

ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people’s lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	78.84	EU , APAC
Minerals	0.01	EU
Fossil materials	21.16	EU , APAC
Bio-based materials	0	EU

BIOGENIC CARBON CONTENT

Product’s biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.567

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit
Declared unit mass, kg	6.573
Mass of packaging, kg	1.43
Functional unit (from PEP PSR0014)	Provide lighting that delivers an outgoing artificial luminous flux of 1000 lumens during a reference lifetime of 35000 hours
Reference service life (years)	25
Assigned lifetime (hours)	100000
GWP-total, A1-A3 (kg CO ₂ e)	58.7
GWP-fossil, A1-A3 (kg CO ₂ e)	60.2
Secondary material, inputs (%)	55.2
Secondary material, outputs (%)	55.2
Total energy use, A1-A3 (kWh)	210
Net freshwater use, A1-A3 (m ³)	2.58E-01

LIFE CYCLE ASSESSMENT

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Installation stage		Use stage							End of life stage				Beyond the system
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	ND	ND	ND	X	ND	X	X	X	X	X
Raw materials	Transport	Manufacturing	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demo.	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling

Modules not declared = ND.

CUT - OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. There is no neglected unit process more than 1% of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product’s manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass
Manufacturing energy and waste	Allocated by mass

Proxy data is used for certain materials due to their unavailability in the database. Conservative choices have been adopted when exact information was missing. Regarding module C1-C4: EOL scenarios are based on default values from EN 50693. For stages description please refer to section Product life cycle in this EPD report.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA Luminaire EPD Generator v2.2.7. The LCA and EPD have been prepared according to the reference standards, EN 50693, and ISO 14040/14044. Ecoinvent v 3.10.1 and One Click LCA databases were used as sources of environmental data. Allocation used in Ecoinvent 3.10.1 environmental data sources follow the methodology 'allocation, cut-off, EN 15804+A2'.

No other sources were used in the modelling of this EPD.

PRODUCT & MANUFACTURING SITES GROUPING

Type of grouping	No grouping
Grouping method	Not applicable
Variation in GWP-fossil for A1-A3, %	Not applicable

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE CYCLE

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production. The material losses occurring during the manufacturing processes are treated as per the waste handling practices in the factory, while scenario assumptions are made in the absence of exact data. The study also considers the fuels used by machines as well as losses during electricity transmission.

The product is made of metals, plastics, and electronic components. All components are transported to the production facility, where the main manufacturing processes primarily are associated with assembly. A2 transport distances are calculated always taking the capital city of component country of origin as a starting point and exact manufacturing location as destination. The finished product can be packaged with polyethylene, cardboard, and/or paper as packaging material before shipment to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible to produce the studied product. Thus, it is possible to allocate it according to the weight of the product analysed in this study.

Co-product allocation is neglected as revenue of co-product is very low, hence, the waste undergoes a conservative waste treatment.

The use of green energy in manufacturing is demonstrated through contractual instruments (GOs, RECs, etc), and its use is ensured throughout the validity period of this EPD.

TRANSPORT AND INSTALLATION (A4-A5)

A4 transport distances are calculated always taking the exact manufacturing location to customer location. If the customer's location is defined as a country or its capital city, the calculation is made to the respective capital city. If the

customer's location is specified as a region, the distance is calculated to the capital city of the best-performing sales country within that region. The transportation method is a combination of lorry and container ship where needed. To be conservative, empty returns are included in this study as implemented through an average load factor in the Ecoinvent transport datapoints. Environmental impacts from installation include waste packaging materials (A5). The packaging waste treatment is assumed to be conservative with incineration without energy recovery. The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

PRODUCT USE AND MAINTENANCE (B1-B7)


During the use phase, the product consumes electricity (B6), which is calculated multiplying the Wattage x Assigned lifetime (hours) x Country energy mix factor. To know which Country energy mix was used in this EPD, please refer to Annex 2.

The Reference service life in years is calculated according to the main application type of the product, based on annual operating hours. Impacts due to electricity production include direct emissions to air, transformation, and transmission losses.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. The transport distance is 150 km while the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

LIFE CYCLE FLOW DIAGRAM - SYSTEM BOUNDARY

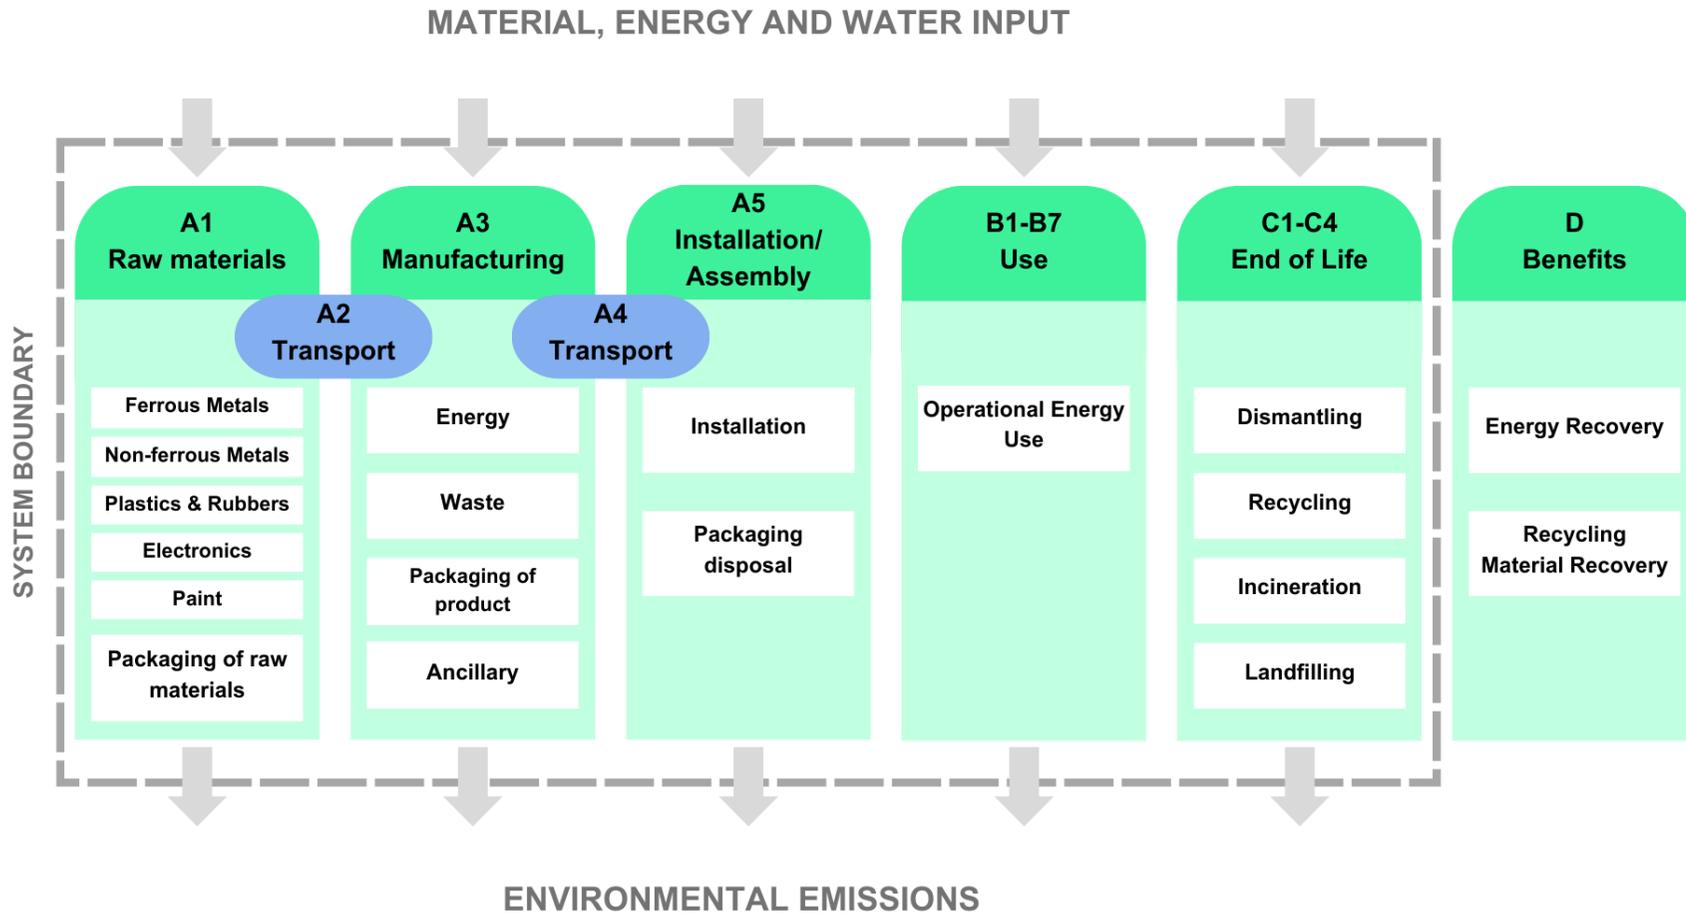

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	5.74E+01	4.72E-01	8.42E-01	5.87E+01	2.38E+00	2.16E+00	ND	ND	ND	ND	ND	9.87E+02	ND	0.00E+00	1.93E-01	1.45E+00	6.87E-01	-2.39E+00
GWP – fossil	kg CO ₂ e	5.71E+01	4.71E-01	2.67E+00	6.02E+01	2.38E+00	8.96E-02	ND	ND	ND	ND	ND	9.82E+02	ND	0.00E+00	1.93E-01	1.45E+00	7.50E-01	-2.38E+00
GWP – biogenic	kg CO ₂ e	1.91E-01	1.06E-04	-1.87E+00	-1.68E+00	5.39E-04	2.07E+00	ND	ND	ND	ND	ND	2.20E+00	ND	0.00E+00	4.21E-05	-3.52E-04	-6.34E-02	-3.12E-03
GWP – LULUC	kg CO ₂ e	8.60E-02	2.12E-04	4.70E-02	1.33E-01	1.06E-03	3.31E-05	ND	ND	ND	ND	ND	3.01E+00	ND	0.00E+00	8.53E-05	1.52E-04	7.40E-05	-3.94E-03
Ozone depletion pot.	kg CFC-11e	6.64E-07	6.95E-09	6.31E-08	7.34E-07	3.51E-08	1.23E-09	ND	ND	ND	ND	ND	1.81E-05	ND	0.00E+00	2.69E-09	1.64E-09	1.12E-09	-1.38E-08
Acidification potential	mol H ⁺ e	3.72E-01	2.00E-03	1.15E-02	3.86E-01	8.11E-03	5.33E-04	ND	ND	ND	ND	ND	5.77E+00	ND	0.00E+00	6.42E-04	1.43E-03	4.73E-04	-2.93E-02
EP-freshwater ²⁾	kg Pe	2.24E-02	3.60E-05	1.00E-03	2.34E-02	1.85E-04	9.00E-06	ND	ND	ND	ND	ND	9.14E-01	ND	0.00E+00	1.50E-05	6.34E-05	1.93E-05	-1.84E-03
EP-marine	kg Ne	6.05E-02	6.21E-04	5.11E-03	6.62E-02	2.66E-03	2.49E-04	ND	ND	ND	ND	ND	9.06E-01	ND	0.00E+00	2.08E-04	4.20E-04	1.11E-03	-2.85E-03
EP-terrestrial	mol Ne	6.17E-01	6.79E-03	3.21E-02	6.56E-01	2.90E-02	2.27E-03	ND	ND	ND	ND	ND	8.12E+00	ND	0.00E+00	2.26E-03	4.25E-03	2.07E-03	-3.18E-02
POCP (“smog”) ³⁾	kg NMVOCe	2.14E-01	2.62E-03	1.20E-02	2.29E-01	1.19E-02	6.45E-04	ND	ND	ND	ND	ND	2.67E+00	ND	0.00E+00	8.94E-04	1.19E-03	6.24E-04	-9.46E-03
ADP-minerals & metals ⁴⁾	kg Sbe	1.49E-03	1.29E-06	1.34E-05	1.50E-03	6.63E-06	2.67E-07	ND	ND	ND	ND	ND	1.33E-02	ND	0.00E+00	6.32E-07	5.98E-06	1.72E-07	-2.77E-04
ADP-fossil resources	MJ	6.89E+02	6.80E+00	3.57E+01	7.32E+02	3.45E+01	9.27E-01	ND	ND	ND	ND	ND	2.28E+04	ND	0.00E+00	2.70E+00	1.59E+00	9.22E-01	-2.87E+01
Water use ⁵⁾	m ³ e depr.	1.58E+01	3.32E-02	1.02E+00	1.69E+01	1.70E-01	1.07E-01	ND	ND	ND	ND	ND	6.23E+02	ND	0.00E+00	1.25E-02	1.10E-01	5.62E-02	-5.64E-01

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	4.23E-06	4.61E-08	2.05E-07	4.48E-06	2.38E-07	6.64E-09	ND	ND	ND	ND	ND	2.06E-05	ND	0.00E+00	1.53E-08	1.69E-08	6.85E-09	-1.71E-07
Ionizing radiation ⁶⁾	kBq U235e	2.72E+00	5.85E-03	1.21E-01	2.85E+00	3.01E-02	1.12E-03	ND	ND	ND	ND	ND	6.31E+02	ND	0.00E+00	2.19E-03	6.39E-03	1.45E-03	-2.64E-01
Ecotoxicity (freshwater)	CTUe	6.07E+02	9.50E-01	1.27E+01	6.20E+02	4.88E+00	2.56E+00	ND	ND	ND	ND	ND	3.48E+03	ND	0.00E+00	4.27E-01	3.36E+00	1.38E+02	-1.98E+01
Human toxicity, cancer	CTUh	4.62E-08	7.85E-11	1.32E-09	4.76E-08	3.92E-10	1.24E-10	ND	ND	ND	ND	ND	3.32E-07	ND	0.00E+00	3.27E-11	1.98E-10	9.80E-11	-2.63E-09
Human tox. non-cancer	CTUh	1.19E-06	4.33E-09	3.47E-08	1.23E-06	2.23E-08	5.04E-09	ND	ND	ND	ND	ND	1.72E-05	ND	0.00E+00	1.69E-09	9.44E-09	7.00E-09	-2.54E-07
SQP ⁷⁾	-	2.02E+02	6.68E+00	1.32E+02	3.41E+02	3.47E+01	4.54E-01	ND	ND	ND	ND	ND	5.08E+03	ND	0.00E+00	1.61E+00	2.31E+00	1.21E+00	-1.23E+01

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	6.10E+01	9.21E-02	8.41E+00	6.95E+01	4.73E-01	-2.54E+01	ND	ND	ND	ND	ND	6.27E+03	ND	0.00E+00	3.70E-02	2.15E-01	-1.15E+00	-3.97E+00
Renew. PER as material	MJ	1.96E+00	0.00E+00	1.64E+01	1.83E+01	0.00E+00	-1.83E+01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-8.20E-03	-1.52E-02	0.00E+00
Total use of renew. PER	MJ	6.30E+01	9.21E-02	2.48E+01	8.78E+01	4.73E-01	-4.37E+01	ND	ND	ND	ND	ND	6.27E+03	ND	0.00E+00	3.70E-02	2.07E-01	-1.17E+00	-3.97E+00
Non-re. PER as energy	MJ	6.49E+02	6.81E+00	2.96E+01	6.85E+02	3.45E+01	9.27E-01	ND	ND	ND	ND	ND	2.29E+04	ND	0.00E+00	2.70E+00	-1.89E+01	-2.26E+01	-2.87E+01
Non-re. PER as material	MJ	3.80E+01	0.00E+00	-1.35E+00	3.67E+01	0.00E+00	-1.61E-01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-1.74E+01	-1.91E+01	0.00E+00
Total use of non-re. PER	MJ	6.87E+02	6.81E+00	2.82E+01	7.22E+02	3.45E+01	7.66E-01	ND	ND	ND	ND	ND	2.29E+04	ND	0.00E+00	2.70E+00	-3.64E+01	-4.17E+01	-2.87E+01
Secondary materials	kg	3.63E+00	0.00E+00	0.00E+00	3.63E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ	2.83E-02	3.60E-05	1.52E-01	1.80E-01	1.87E-04	1.15E-05	ND	ND	ND	ND	ND	3.02E-02	ND	0.00E+00	1.55E-05	7.63E-05	1.38E-05	-3.53E-04
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	2.34E-01	9.91E-04	2.31E-02	2.58E-01	5.10E-03	1.74E-03	ND	ND	ND	ND	ND	1.97E+01	ND	0.00E+00	3.58E-04	2.11E-03	-3.66E-03	-1.99E-02

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	9.39E+00	1.15E-02	1.50E-01	9.55E+00	5.85E-02	2.82E-02	ND	ND	ND	ND	ND	5.78E+01	ND	0.00E+00	4.71E-03	3.34E-02	4.10E-02	-2.80E-01
Non-hazardous waste	kg	2.06E+02	2.11E-01	9.04E+00	2.16E+02	1.08E+00	1.53E+00	ND	ND	ND	ND	ND	4.47E+03	ND	0.00E+00	8.83E-02	9.13E-01	8.37E+00	-9.98E+00
Radioactive waste	kg	6.78E-04	1.43E-06	2.88E-05	7.09E-04	7.36E-06	2.81E-07	ND	ND	ND	ND	ND	1.62E-01	ND	0.00E+00	5.36E-07	1.57E-06	3.58E-07	-6.47E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	7.91E-02	7.91E-02	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	3.63E+00	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	6.43E+00	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	2.71E+00	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	3.73E+00	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	5.71E+01	4.69E-01	2.86E+00	6.05E+01	2.36E+00	8.89E-02	ND	ND	ND	ND	ND	9.82E+02	ND	0.00E+00	1.92E-01	1.45E+00	8.14E-01	-2.38E+00
Ozone depletion Pot.	kg CFC-11e	6.02E-07	5.55E-09	6.37E-08	6.71E-07	2.80E-08	1.05E-09	ND	ND	ND	ND	ND	1.51E-05	ND	0.00E+00	2.15E-09	1.39E-09	9.20E-10	-1.17E-08
Acidification	kg SO ₂ e	3.13E-01	1.54E-03	8.09E-03	3.23E-01	6.19E-03	3.91E-04	ND	ND	ND	ND	ND	4.92E+00	ND	0.00E+00	4.92E-04	1.12E-03	3.43E-04	-2.54E-02
Eutrophication	kg PO ₄ ³ e	7.94E-02	3.28E-04	5.51E-03	8.53E-02	1.51E-03	1.22E-04	ND	ND	ND	ND	ND	6.36E-01	ND	0.00E+00	1.20E-04	2.06E-04	2.83E-04	-1.75E-03
POCP (“smog”)	kg C ₂ H ₄ e	2.55E-02	1.23E-04	9.21E-04	2.65E-02	5.52E-04	2.98E-05	ND	ND	ND	ND	ND	2.68E-01	ND	0.00E+00	4.40E-05	6.76E-05	4.58E-05	-1.21E-03
ADP-elements	kg Sbe	1.47E-03	1.26E-06	1.32E-05	1.49E-03	6.47E-06	2.23E-07	ND	ND	ND	ND	ND	1.32E-02	ND	0.00E+00	6.17E-07	5.94E-06	1.52E-07	-2.77E-04
ADP-fossil	MJ	6.44E+02	6.71E+00	3.37E+01	6.85E+02	3.40E+01	9.09E-01	ND	ND	ND	ND	ND	1.17E+04	ND	0.00E+00	2.67E+00	1.49E+00	8.99E-01	-2.45E+01

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG 9)	kg CO ₂ e	5.72E+01	4.71E-01	2.71E+00	6.03E+01	2.38E+00	8.96E-02	ND	ND	ND	ND	ND	9.85E+02	ND	0.00E+00	1.93E-01	1.45E+00	7.50E-01	-2.39E+00

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

ENVIRONMENTAL IMPACT DATA, RESULTS PER FUNCTIONAL UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ éq/FU	7.88E+00	6.48E-02	1.16E-01	8.06E+00	3.27E-01	2.97E-01	ND	ND	ND	ND	ND	1.36E+02	ND	0.00E+00	2.65E-02	2.00E-01	9.44E-02	-3.29E-01
GWP – fossil	kg CO ₂ éq/FU	7.85E+00	6.48E-02	3.67E-01	8.28E+00	3.27E-01	1.23E-02	ND	ND	ND	ND	ND	1.35E+02	ND	0.00E+00	2.65E-02	2.00E-01	1.03E-01	-3.28E-01
GWP – biogenic	kg CO ₂ éq/FU	2.63E-02	1.45E-05	-2.57E-01	-2.31E-01	7.40E-05	2.85E-01	ND	ND	ND	ND	ND	3.03E-01	ND	0.00E+00	5.78E-06	-4.84E-05	-8.72E-03	-4.29E-04
GWP – LULUC	kg CO ₂ éq/FU	1.18E-02	2.92E-05	6.47E-03	1.83E-02	1.46E-04	4.54E-06	ND	ND	ND	ND	ND	4.14E-01	ND	0.00E+00	1.17E-05	2.09E-05	1.02E-05	-5.42E-04
Ozone depletion pot.	kg CFC-11e/FU	9.13E-08	9.56E-10	8.68E-09	1.01E-07	4.83E-09	1.69E-10	ND	ND	ND	ND	ND	2.49E-06	ND	0.00E+00	3.70E-10	2.26E-10	1.54E-10	-1.90E-09
Acidification potential	mole H ⁺ e/FU	5.12E-02	2.75E-04	1.59E-03	5.31E-02	1.11E-03	7.32E-05	ND	ND	ND	ND	ND	7.94E-01	ND	0.00E+00	8.82E-05	1.96E-04	6.50E-05	-4.03E-03
EP-freshwater ²⁾	kg Pe/FU	3.08E-03	4.95E-06	1.38E-04	3.22E-03	2.54E-05	1.24E-06	ND	ND	ND	ND	ND	1.26E-01	ND	0.00E+00	2.06E-06	8.71E-06	2.66E-06	-2.52E-04
EP-marine	kg Ne/FU	8.32E-03	8.54E-05	7.02E-04	9.10E-03	3.66E-04	3.42E-05	ND	ND	ND	ND	ND	1.25E-01	ND	0.00E+00	2.86E-05	5.78E-05	1.52E-04	-3.92E-04
EP-terrestrial	mol Ne/FU	8.48E-02	9.33E-04	4.41E-03	9.01E-02	3.98E-03	3.12E-04	ND	ND	ND	ND	ND	1.12E+00	ND	0.00E+00	3.11E-04	5.85E-04	2.84E-04	-4.38E-03
POCP (“smog”) ³⁾	kg NMVOCe/	2.95E-02	3.61E-04	1.66E-03	3.15E-02	1.64E-03	8.87E-05	ND	ND	ND	ND	ND	3.67E-01	ND	0.00E+00	1.23E-04	1.63E-04	8.58E-05	-1.30E-03
ADP-minerals & metals ⁴⁾	kg Sbe/FU	2.05E-04	1.77E-07	1.85E-06	2.07E-04	9.12E-07	3.66E-08	ND	ND	ND	ND	ND	1.82E-03	ND	0.00E+00	8.69E-08	8.22E-07	2.36E-08	-3.81E-05
ADP-fossil resources	MJ/FU	9.48E+01	9.35E-01	4.90E+00	1.01E+02	4.74E+00	1.27E-01	ND	ND	ND	ND	ND	3.14E+03	ND	0.00E+00	3.71E-01	2.19E-01	1.27E-01	-3.95E+00
Water use ⁵⁾	m ³ e priv./FU	2.17E+00	4.57E-03	1.41E-01	2.32E+00	2.34E-02	1.47E-02	ND	ND	ND	ND	ND	8.56E+01	ND	0.00E+00	1.72E-03	1.51E-02	7.73E-03	-7.75E-02

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence /FU	5.81E-07	6.34E-09	2.81E-08	6.16E-07	3.27E-08	9.13E-10	ND	ND	ND	ND	ND	2.83E-06	ND	0.00E+00	2.10E-09	2.32E-09	9.42E-10	-2.35E-08
Ionizing radiation ⁶⁾	kBq U235e/FU	3.74E-01	8.04E-04	1.66E-02	3.92E-01	4.13E-03	1.54E-04	ND	ND	ND	ND	ND	8.68E+01	ND	0.00E+00	3.01E-04	8.78E-04	2.00E-04	-3.63E-02
Ecotoxicity (freshwater)	CTUe/FU	8.34E+01	1.31E-01	1.75E+00	8.53E+01	6.71E-01	3.52E-01	ND	ND	ND	ND	ND	4.79E+02	ND	0.00E+00	5.87E-02	4.61E-01	1.90E+01	-2.72E+00
Human toxicity, cancer	CTUh/FU	6.35E-09	1.08E-11	1.82E-10	6.54E-09	5.39E-11	1.70E-11	ND	ND	ND	ND	ND	4.56E-08	ND	0.00E+00	4.50E-12	2.72E-11	1.35E-11	-3.62E-10
Human tox. non-cancer	CTUh/FU	1.64E-07	5.95E-10	4.77E-09	1.69E-07	3.07E-09	6.93E-10	ND	ND	ND	ND	ND	2.37E-06	ND	0.00E+00	2.32E-10	1.30E-09	9.62E-10	-3.50E-08
SQP ⁷⁾	-/FU	2.78E+01	9.18E-01	1.82E+01	4.69E+01	4.78E+00	6.24E-02	ND	ND	ND	ND	ND	6.99E+02	ND	0.00E+00	2.22E-01	3.18E-01	1.66E-01	-1.69E+00

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ/FU	8.39E+00	1.27E-02	1.16E+00	9.55E+00	6.50E-02	-3.49E+00	ND	ND	ND	ND	ND	8.62E+02	ND	0.00E+00	5.09E-03	2.96E-02	-1.58E-01	-5.46E-01
Renew. PER as material	MJ/FU	2.69E-01	0.00E+00	2.25E+00	2.52E+00	0.00E+00	-2.51E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-1.13E-03	-2.09E-03	0.00E+00
Total use of renew. PER	MJ/FU	8.65E+00	1.27E-02	3.40E+00	1.21E+01	6.50E-02	-6.01E+00	ND	ND	ND	ND	ND	8.62E+02	ND	0.00E+00	5.09E-03	2.84E-02	-1.60E-01	-5.46E-01
Non-re. PER as energy	MJ/FU	8.92E+01	9.35E-01	4.07E+00	9.42E+01	4.74E+00	1.27E-01	ND	ND	ND	ND	ND	3.14E+03	ND	0.00E+00	3.71E-01	-2.60E+00	-3.11E+00	-3.95E+00
Non-re. PER as material	MJ/FU	5.23E+00	0.00E+00	-1.85E-01	5.05E+00	0.00E+00	-2.21E-02	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-2.40E+00	-2.63E+00	0.00E+00
Total use of non-re. PER	MJ/FU	9.44E+01	9.35E-01	3.88E+00	9.92E+01	4.74E+00	1.05E-01	ND	ND	ND	ND	ND	3.14E+03	ND	0.00E+00	3.71E-01	-5.00E+00	-5.73E+00	-3.95E+00
Secondary materials	kg/FU	4.99E-01	0.00E+00	0.00E+00	4.99E-01	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ/FU	3.89E-03	4.95E-06	2.09E-02	2.48E-02	2.56E-05	1.59E-06	ND	ND	ND	ND	ND	4.15E-03	ND	0.00E+00	2.12E-06	1.05E-05	1.89E-06	-4.85E-05
Non-ren. secondary fuels	MJ/FU	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³ /FU	3.22E-02	1.36E-04	3.18E-03	3.55E-02	7.01E-04	2.39E-04	ND	ND	ND	ND	ND	2.71E+00	ND	0.00E+00	4.92E-05	2.90E-04	-5.04E-04	-2.74E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg/FU	1.29E+00	1.58E-03	2.06E-02	1.31E+00	8.04E-03	3.88E-03	ND	ND	ND	ND	ND	7.95E+00	ND	0.00E+00	6.47E-04	4.59E-03	5.64E-03	-3.86E-02
Non-hazardous waste	kg/FU	2.84E+01	2.90E-02	1.24E+00	2.96E+01	1.49E-01	2.10E-01	ND	ND	ND	ND	ND	6.15E+02	ND	0.00E+00	1.21E-02	1.25E-01	1.15E+00	-1.37E+00
Radioactive waste	kg/FU	9.33E-05	1.97E-07	3.96E-06	9.74E-05	1.01E-06	3.87E-08	ND	ND	ND	ND	ND	2.23E-02	ND	0.00E+00	7.36E-08	2.16E-07	4.92E-08	-8.90E-06

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	1.09E-02	1.09E-02	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	4.99E-01	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	8.85E-01	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	3.72E-01	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	5.12E-01	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ eq./FU	7.85E+00	6.44E-02	3.94E-01	8.31E+00	3.25E-01	1.22E-02	ND	ND	ND	ND	ND	1.35E+02	ND	0.00E+00	2.63E-02	2.00E-01	1.12E-01	-3.27E-01
Ozone depletion Pot.	kg CFC ₁₁ /FU	8.27E-08	7.62E-10	8.76E-09	9.22E-08	3.85E-09	1.44E-10	ND	ND	ND	ND	ND	2.08E-06	ND	0.00E+00	2.96E-10	1.91E-10	1.26E-10	-1.61E-09
Acidification	kg SO ₂ e/FU	4.31E-02	2.12E-04	1.11E-03	4.44E-02	8.51E-04	5.38E-05	ND	ND	ND	ND	ND	6.76E-01	ND	0.00E+00	6.76E-05	1.54E-04	4.72E-05	-3.49E-03
Eutrophication	kg PO ₄ ³ e/FU	1.09E-02	4.51E-05	7.57E-04	1.17E-02	2.07E-04	1.67E-05	ND	ND	ND	ND	ND	8.75E-02	ND	0.00E+00	1.64E-05	2.83E-05	3.89E-05	-2.41E-04
POCP (“smog”)	kg C ₂ H ₄ e/FU	3.50E-03	1.70E-05	1.27E-04	3.64E-03	7.59E-05	4.10E-06	ND	ND	ND	ND	ND	3.69E-02	ND	0.00E+00	6.05E-06	9.29E-06	6.30E-06	-1.67E-04
ADP-elements	kg Sbe/FU	2.02E-04	1.73E-07	1.81E-06	2.04E-04	8.89E-07	3.06E-08	ND	ND	ND	ND	ND	1.82E-03	ND	0.00E+00	8.49E-08	8.16E-07	2.09E-08	-3.81E-05
ADP-fossil	MJ/FU	8.86E+01	9.23E-01	4.63E+00	9.41E+01	4.68E+00	1.25E-01	ND	ND	ND	ND	ND	1.61E+03	ND	0.00E+00	3.67E-01	2.05E-01	1.24E-01	-3.37E+00

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ⁹⁾	kg CO ₂ e/FU	7.86E+00	6.48E-02	3.73E-01	8.30E+00	3.27E-01	1.23E-02	ND	ND	ND	ND	ND	1.35E+02	ND	0.00E+00	2.65E-02	2.00E-01	1.03E-01	-3.28E-01

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

SCENARIO DOCUMENTATION

DATA SOURCES

Manufacturing energy scenario documentation – A3 (Energy data source)

1. Energy supply, electricity production, co-generation oil and gas, Heat and power co-generation, natural gas, combined cycle power plant, 400MW electrical, Spain, ecoinvent 3.10.1, 0.0249 kgCO_{2e}/MJ
2. Energy supply, electricity production, solar photovoltaic, Electricity production, photovoltaic, 570kWp open ground installation, multi-Si, Spain, ecoinvent 3.10.1, 0.0673 kgCO_{2e}/kWh

Transport scenario documentation - A4

1. Transport, freight, lorry >32 metric ton, EURO5, 2760.17 km
2. Transport, freight, sea, container ship, 0.0 km

Installation scenario documentation - A5 (Waste materials data source)

1. Market for corrugated board box, 1.38 kg
2. Market for printed paper, offset, 0.05 kg

Use stages scenario documentation - B6-B7 (Energy data source)

1. Energy supply, electricity transformation and distribution, distribution low voltage, Market group for electricity, low voltage, Europe, 3000.0 kWh

TRANSPORT SCENARIO DOCUMENTATION - A4

Scenario parameter	Value
Capacity utilization (including empty return) %	50 %
Bulk density of transported products / kg/m ³	9.50E+01
Volume capacity utilization factor (factor: =1 or <1 or ≥1 for compressed or nested packaged products)	1

INSTALLATION SCENARIO DOCUMENTATION - A5

Scenario parameter	Value
Ancillary materials for installation (specified by material) / kg or other units as appropriate	0
Water use / m ³	0
Other resource use / kg	0
Direct emissions to ambient air, soil and water / kg	0

USE STAGES SCENARIO DOCUMENTATION - B6-B7 USE OF ENERGY AND WATER

Scenario information	Value
Ancillary materials specified by material / kg or units as appropriate	Not applicable
Net fresh water consumption / m ³	0
Power output of equipment / kW	30
Characteristic performance, e.g., energy efficiency, emissions, variation of performance with capacity utilization, etc. / Units as appropriate	For more details see product classification table and product description.
Further assumptions for scenario development, e.g., frequency and period of use, number of occupants / Units as appropriate	For more details see product classification table and product description.

END OF LIFE SCENARIO DOCUMENTATION

Scenario information	Value
Collection process – kg collected separately	6.573
Collection process – kg collected with mixed waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	3.63E+00
Recovery process – kg for energy recovery	0
Disposal (total) – kg for final deposition	2.35E+00
Scenario assumptions e.g. transportation	Lorry, 16-32 metric ton, EURO5; 150 km

THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15804+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.



Program assistant: Xinyuan Zhang



The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

[Verified tools](#)

Tool verifier: Hai Ha Nguyen

Tool verification validity: 28 March 2025 - 27 March 2028

APPENDIX 1

MATERIAL COMPOSITION

The product material composition is illustrated in the table below. The material weight is given in grams and in percentage on total product weight.

Table 1: Material composition

Material	Weight (g)	Weight-%
Aluminium	4954.0	75.37
Copper	16.45	0.25
Other Plastics	1141.86	17.37
Paint	128.0	1.95
PCB Alu	55.8	0.85
PCB Copper	37.1	0.56
PCB Iron	28.83	0.44
PCB Non-ferrous metal	0.03	0.0
PCB Support	120.75	1.84
PCB Tin	2.02	0.03
Silica Sand	0.5	0.01
Stainless Steel	2.0	0.03

Steel

85.42

1.3

APPENDIX 2

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

In this EPD the B6 impact has been calculated using the energy mix of EU. The table in this appendix is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

If for example this EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	4.44E-01	4.75E-03	2.34E-02	4.72E-01	9.50E-04	8.13E-03	ND	ND	ND	ND	ND	4.06E-02	ND	0.00E+00	5.50E-04	2.23E-03	7.33E-04	-2.82E-02

Divide that value according to the EU value from the following table (EU = 3.30E-01) and then multiplying for the Finland value from the same table (FINLAND = 1.54E-01).

Thus, the calculation of this example would be:

New B6 GWP tot for Finland = $(4.06E-02 / 3.30E-01) \times 1.54E-01 = 1.89E-02$.

Country	GWP tot (kg CO2 eq. per kwh)		
AFRICA	7.30E-01	GERMANY	3.90E-01
APAC	9.50E-01	INDIA	1.50E+00
AUSTRALIA	8.40E-01	ITALY	3.50E-01
AUSTRIA	2.30E-01	LATAM	3.90E-01
BELGIUM	2.00E-01	NAM	4.50E-01
CHINA	1.02E+00	NETHERLANDS	3.90E-01
DENMARK	1.60E-01	NORWAY	4.50E-02
EU	3.30E-01	ROW	7.30E-01
FINLAND	1.54E-01	SPAIN	2.10E-01
FRANCE	8.70E-02	SWEDEN	3.70E-02
		UK	2.60E-01

Source Ecoinvent 3.10.1

APPENDIX 3 - EPD HUB ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family.

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table 1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

The following list of product configurations is not exhaustive. Please use the formula defined in point 1 above to calculate the exact power scaling factor (PSF) for any specific configuration.

Table 2: GWP per scaling factor (EPD Hub aligned)

	12NC or Product Family Code	Description	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDP260	BDP260LED8-4S740Premium DM50 BL2	544	5.7	95.4	0.19	0.19	0.143	0.143	0.105	187.5	141.1	141.1	103.6
2	BDP260	BDP260LED10-4S740Premium DM50 BL2	680	6.9	98.6	0.23	0.23	0.173	0.173	0.127	227.0	170.8	170.8	125.3
3	BDP260	BDP260LED12-4S740Premium DM50 BL2	816	7.9	103.3	0.263	0.263	0.197	0.197	0.145	259.6	194.4	194.4	143.1
4	BDP260	BDP260LED14-4S740Premium DM50 BL2	952	8.9	107.0	0.297	0.297	0.223	0.223	0.163	293.1	220.1	220.1	160.9
5	BDP260	BDP260LED16-4S740Premium DM50 BL2	1088	10.0	108.8	0.333	0.333	0.25	0.25	0.183	328.7	246.8	246.8	180.6
6	BDP260	BDP260LED18-4S740Premium DM50 BL2	1224	11.2	109.3	0.373	0.373	0.28	0.28	0.205	368.2	276.4	276.4	202.3
7	BDP260	BDP260LED20-4S740Premium DM50 BL2	1360	12.4	109.7	0.413	0.413	0.31	0.31	0.227	407.6	306.0	306.0	224.0
8	BDP260	BDP260LED22-4S740Premium DM50 BL2	1496	13.4	111.6	0.447	0.447	0.335	0.335	0.246	441.2	330.6	330.6	242.8
9	BDP260	BDP260LED24-4S740Premium DM50 BL2	1632	14.8	110.3	0.493	0.493	0.37	0.37	0.271	486.6	365.2	365.2	267.5
10	BDP260	BDP260LED27-4S740Premium DM50 BL2	1836	16.6	110.6	0.553	0.553	0.415	0.415	0.304	545.8	409.6	409.6	300.0

11	BDP260	BDP260LED30-4S740Premium DM50 BL2	2040	18.6	109.7	0.62	0.62	0.465	0.465	0.341	611.9	459.0	459.0	336.6
12	BDP260	BDP260LED35-4S740Premium DM50 BL2	2380	22.0	108.2	0.733	0.733	0.55	0.55	0.403	723.5	542.9	542.9	397.8
13	BDP260	BDP260LED39-4S740Premium DM50 BL2	2613	23.0	113.6	0.767	0.767	0.575	0.575	0.422	757.0	567.5	567.5	416.5
14	BDP260	BDP260LED45-4S740Premium DM50 BL2	3015	27.0	111.7	0.9	0.9	0.675	0.675	0.495	888.3	666.2	666.2	488.6
15	BDP260	BDP260LED50-4S740Premium DM50 BL2	3350	30.0	111.7	1.0	1.0	0.75	0.75	0.55	987.0	740.2	740.2	542.9
16	BDP260	BDP260LED55-4S740Premium DM50 BL2	3752	33.0	113.7	1.1	1.1	0.825	0.825	0.605	1085.7	814.3	814.3	597.1
17	BDP260	BDP260LED59-4S740Premium DM50 BL2	4020	36.0	111.7	1.2	1.2	0.9	0.9	0.66	1184.4	888.3	888.3	651.4
18	BDP260	BDP260LED64-4S740Premium DM50 BL2	4288	39.5	108.6	1.317	1.317	0.988	0.988	0.724	1299.9	975.2	975.2	714.6
19	BDP260	BDP260LED69-4S740Premium DM50 BL2	4690	38.5	121.8	1.283	1.283	0.962	0.962	0.706	1266.3	949.5	949.5	696.8
20	BDP260	BDP260LED74-4S740Premium DM50 BL2	4958	41.5	119.5	1.383	1.383	1.037	1.037	0.761	1365.0	1023.5	1023.5	751.1
21	BDP260	BDP260LED79-4S740Premium DM50 BL2	5226	44.5	117.4	1.483	1.483	1.112	1.112	0.816	1463.7	1097.5	1097.5	805.4
22	BDP260	BDP260LED84-4S740Premium DM50 BL2	5544	47.5	116.7	1.583	1.583	1.187	1.187	0.871	1562.4	1171.6	1171.6	859.7
23	BDP260	BDP260LED90-4S740Premium DM50 BL2	5940	51.0	116.5	1.7	1.7	1.275	1.275	0.935	1677.9	1258.4	1258.4	922.8
24	BDP260	BDP260LED94-4S740Premium DM50 BL2	6204	53.0	117.1	1.767	1.767	1.325	1.325	0.972	1744.0	1307.8	1307.8	959.4

25	BDP260	BDP260LED100-4S740Premium DM50 BL2	6500	57.0	114.0	1.9	1.9	1.425	1.425	1.045	1875.3	1406.5	1406.5	1031.4
26	BDP260	BDP260LED8-4S730Premium DM50 BL2	544	6.0	90.7	0.2	0.2	0.15	0.15	0.11	197.4	148.0	148.0	108.6
27	BDP260	BDP260LED10-4S730Premium DM50 BL2	680	7.2	94.4	0.24	0.24	0.18	0.18	0.132	236.9	177.7	177.7	130.3
28	BDP260	BDP260LED12-4S730Premium DM50 BL2	816	8.2	99.5	0.273	0.273	0.205	0.205	0.15	269.5	202.3	202.3	148.0
29	BDP260	BDP260LED14-4S730Premium DM50 BL2	952	9.4	101.3	0.313	0.313	0.235	0.235	0.172	308.9	231.9	231.9	169.8
30	BDP260	BDP260LED16-4S730Premium DM50 BL2	1088	10.6	102.6	0.353	0.353	0.265	0.265	0.194	348.4	261.6	261.6	191.5
31	BDP260	BDP260LED18-4S730Premium DM50 BL2	1224	11.8	103.7	0.393	0.393	0.295	0.295	0.216	387.9	291.2	291.2	213.2
32	BDP260	BDP260LED20-4S730Premium DM50 BL2	1360	13.0	104.6	0.433	0.433	0.325	0.325	0.238	427.4	320.8	320.8	234.9
33	BDP260	BDP260LED22-4S730Premium DM50 BL2	1496	14.2	105.4	0.473	0.473	0.355	0.355	0.26	466.9	350.4	350.4	256.6
34	BDP260	BDP260LED24-4S730Premium DM50 BL2	1632	15.6	104.6	0.52	0.52	0.39	0.39	0.286	513.2	384.9	384.9	282.3
35	BDP260	BDP260LED27-4S730Premium DM50 BL2	1836	17.6	104.3	0.587	0.587	0.44	0.44	0.323	579.4	434.3	434.3	318.8
36	BDP260	BDP260LED30-4S730Premium DM50 BL2	2040	19.8	103.0	0.66	0.66	0.495	0.495	0.363	651.4	488.6	488.6	358.3
37	BDP260	BDP260LED35-4S730Premium DM50 BL2	2380	23.5	101.3	0.783	0.783	0.587	0.587	0.431	772.8	579.4	579.4	425.4
38	BDP260	BDP260LED39-4S730Premium DM50 BL2	2613	24.5	106.7	0.817	0.817	0.613	0.613	0.449	806.4	605.0	605.0	443.2

39	BDP260	BDP260LED45-4S730Premium DM50 BL2	3015	28.5	105.8	0.95	0.95	0.712	0.712	0.522	937.6	702.7	702.7	515.2
40	BDP260	BDP260LED50-4S730Premium DM50 BL2	3350	32.0	104.7	1.067	1.067	0.8	0.8	0.587	1053.1	789.6	789.6	579.4
41	BDP260	BDP260LED55-4S730Premium DM50 BL2	3752	35.5	105.7	1.183	1.183	0.887	0.887	0.651	1167.6	875.5	875.5	642.5
42	BDP260	BDP260LED59-4S730Premium DM50 BL2	4020	38.5	104.4	1.283	1.283	0.962	0.962	0.706	1266.3	949.5	949.5	696.8
43	BDP260	BDP260LED64-4S730Premium DM50 BL2	4288	38.0	112.8	1.267	1.267	0.95	0.95	0.697	1250.5	937.6	937.6	687.9
44	BDP260	BDP260LED69-4S730Premium DM50 BL2	4690	41.0	114.4	1.367	1.367	1.025	1.025	0.752	1349.2	1011.7	1011.7	742.2
45	BDP260	BDP260LED74-4S730Premium DM50 BL2	4958	44.0	112.7	1.467	1.467	1.1	1.1	0.807	1447.9	1085.7	1085.7	796.5
46	BDP260	BDP260LED79-4S730Premium DM50 BL2	5280	47.5	111.2	1.583	1.583	1.187	1.187	0.871	1562.4	1171.6	1171.6	859.7
47	BDP260	BDP260LED84-4S730Premium DM50 BL2	5544	51.0	108.7	1.7	1.7	1.275	1.275	0.935	1677.9	1258.4	1258.4	922.8
48	BDP260	BDP260LED90-4S730Premium DM50 BL2	5940	54.0	110.0	1.8	1.8	1.35	1.35	0.99	1776.6	1332.5	1332.5	977.1
49	BDP260	BDP260LED94-4S730Premium DM50 BL2	6110	57.0	107.2	1.9	1.9	1.425	1.425	1.045	1875.3	1406.5	1406.5	1031.4
50	BDP260	BDP260LED100-4S730Premium DM50 BL2	6500	61.0	106.6	2.033	2.033	1.525	1.525	1.118	2006.6	1505.2	1505.2	1103.5
51	BDP260	BDP260LED7-4S727Premium DM50 BL2	476	5.9	80.7	0.197	0.197	0.148	0.148	0.108	194.4	146.1	146.1	106.6
52	BDP260	BDP260LED9-4S727Premium DM50 BL2	612	7.2	85.0	0.24	0.24	0.18	0.18	0.132	236.9	177.7	177.7	130.3

53	BDP260	BDP260LED11-4S727Premium DM50 BL2	748	8.4	89.0	0.28	0.28	0.21	0.21	0.154	276.4	207.3	207.3	152.0
54	BDP260	BDP260LED13-4S727Premium DM50 BL2	884	9.7	91.1	0.323	0.323	0.242	0.242	0.178	318.8	238.9	238.9	175.7
55	BDP260	BDP260LED14-4S727Premium DM50 BL2	952	10.4	91.5	0.347	0.347	0.26	0.26	0.191	342.5	256.6	256.6	188.5
56	BDP260	BDP260LED16-4S727Premium DM50 BL2	1088	11.8	92.2	0.393	0.393	0.295	0.295	0.216	387.9	291.2	291.2	213.2
57	BDP260	BDP260LED18-4S727Premium DM50 BL2	1224	13.2	92.7	0.44	0.44	0.33	0.33	0.242	434.3	325.7	325.7	238.9
58	BDP260	BDP260LED20-4S727Premium DM50 BL2	1360	14.6	93.2	0.487	0.487	0.365	0.365	0.268	480.7	360.3	360.3	264.5
59	BDP260	BDP260LED22-4S727Premium DM50 BL2	1496	16.0	93.5	0.533	0.533	0.4	0.4	0.293	526.1	394.8	394.8	289.2
60	BDP260	BDP260LED24-4S727Premium DM50 BL2	1632	17.6	92.7	0.587	0.587	0.44	0.44	0.323	579.4	434.3	434.3	318.8
61	BDP260	BDP260LED27-4S727Premium DM50 BL2	1836	20.0	91.8	0.667	0.667	0.5	0.5	0.367	658.3	493.5	493.5	362.2
62	BDP260	BDP260LED30-4S727Premium DM50 BL2	2040	22.5	90.7	0.75	0.75	0.562	0.562	0.413	740.2	554.7	554.7	407.6
63	BDP260	BDP260LED35-4S727Premium DM50 BL2	2345	26.5	88.5	0.883	0.883	0.662	0.662	0.486	871.5	653.4	653.4	479.7
64	BDP260	BDP260LED39-4S727Premium DM50 BL2	2613	27.5	95.0	0.917	0.917	0.688	0.688	0.504	905.1	679.1	679.1	497.4
65	BDP260	BDP260LED45-4S727Premium DM50 BL2	3015	32.0	94.2	1.067	1.067	0.8	0.8	0.587	1053.1	789.6	789.6	579.4
66	BDP260	BDP260LED50-4S727Premium DM50 BL2	3350	36.0	93.1	1.2	1.2	0.9	0.9	0.66	1184.4	888.3	888.3	651.4

67	BDP260	BDP260LED55-4S727Premium DM50 BL2	3696	40.5	91.3	1.35	1.35	1.013	1.013	0.743	1332.5	999.8	999.8	733.3
68	BDP260	BDP260LED59-4S727Premium DM50 BL2	4020	39.5	101.8	1.317	1.317	0.988	0.988	0.724	1299.9	975.2	975.2	714.6
69	BDP260	BDP260LED64-4S727Premium DM50 BL2	4288	42.5	100.9	1.417	1.417	1.063	1.063	0.779	1398.6	1049.2	1049.2	768.9
70	BDP260	BDP260LED69-4S727Premium DM50 BL2	4690	46.5	100.9	1.55	1.55	1.163	1.163	0.853	1529.9	1147.9	1147.9	841.9
71	BDP260	BDP260LED74-4S727Premium DM50 BL2	4884	50.0	97.7	1.667	1.667	1.25	1.25	0.917	1645.3	1233.8	1233.8	905.1
72	BDP260	BDP260LED79-4S727Premium DM50 BL2	5280	53.0	99.6	1.767	1.767	1.325	1.325	0.972	1744.0	1307.8	1307.8	959.4
73	BDP260	BDP260LED84-4S727Premium DM50 BL2	5460	57.0	95.8	1.9	1.9	1.425	1.425	1.045	1875.3	1406.5	1406.5	1031.4
74	BDP260	BDP260LED90-4S727Premium DM50 BL2	5850	62.0	94.4	2.067	2.067	1.55	1.55	1.137	2040.1	1529.9	1529.9	1122.2
75	BDP260	BDP260LED94-4S727Premium DM50 BL2	6110	65.0	94.0	2.167	2.167	1.625	1.625	1.192	2138.8	1603.9	1603.9	1176.5
76	BDP260	BDP260LED100-4S727Premium DM50 BL2	6400	69.0	92.8	2.3	2.3	1.725	1.725	1.265	2270.1	1702.6	1702.6	1248.6
77	BDP260	BDP260LED7-4S722Premium DM50 BL2	476	6.5	73.2	0.217	0.217	0.163	0.163	0.119	214.2	160.9	160.9	117.5
78	BDP260	BDP260LED9-4S722Premium DM50 BL2	612	7.8	78.5	0.26	0.26	0.195	0.195	0.143	256.6	192.5	192.5	141.1
79	BDP260	BDP260LED11-4S722Premium DM50 BL2	748	9.2	81.3	0.307	0.307	0.23	0.23	0.169	303.0	227.0	227.0	166.8
80	BDP260	BDP260LED12-4S722Premium DM50 BL2	816	10.0	81.6	0.333	0.333	0.25	0.25	0.183	328.7	246.8	246.8	180.6

81	BDP260	BDP260LED14-4S722Premium DM50 BL2	952	11.6	82.1	0.387	0.387	0.29	0.29	0.213	382.0	286.2	286.2	210.2
82	BDP260	BDP260LED16-4S722Premium DM50 BL2	1088	13.0	83.7	0.433	0.433	0.325	0.325	0.238	427.4	320.8	320.8	234.9
83	BDP260	BDP260LED18-4S722Premium DM50 BL2	1224	14.6	83.8	0.487	0.487	0.365	0.365	0.268	480.7	360.3	360.3	264.5
84	BDP260	BDP260LED20-4S722Premium DM50 BL2	1360	16.4	82.9	0.547	0.547	0.41	0.41	0.301	539.9	404.7	404.7	297.1
85	BDP260	BDP260LED22-4S722Premium DM50 BL2	1496	18.0	83.1	0.6	0.6	0.45	0.45	0.33	592.2	444.2	444.2	325.7
86	BDP260	BDP260LED24-4S722Premium DM50 BL2	1632	19.8	82.4	0.66	0.66	0.495	0.495	0.363	651.4	488.6	488.6	358.3
87	BDP260	BDP260LED27-4S722Premium DM50 BL2	1836	22.5	81.6	0.75	0.75	0.562	0.562	0.413	740.2	554.7	554.7	407.6
88	BDP260	BDP260LED30-4S722Premium DM50 BL2	2010	25.5	78.8	0.85	0.85	0.637	0.637	0.468	838.9	628.7	628.7	461.9
89	BDP260	BDP260LED35-4S722Premium DM50 BL2	2345	27.5	85.3	0.917	0.917	0.688	0.688	0.504	905.1	679.1	679.1	497.4
90	BDP260	BDP260LED39-4S722Premium DM50 BL2	2613	31.0	84.3	1.033	1.033	0.775	0.775	0.568	1019.6	764.9	764.9	560.6
91	BDP260	BDP260LED45-4S722Premium DM50 BL2	3015	36.5	82.6	1.217	1.217	0.913	0.913	0.669	1201.2	901.1	901.1	660.3
92	BDP260	BDP260LED50-4S722Premium DM50 BL2	3350	37.0	90.5	1.233	1.233	0.925	0.925	0.678	1217.0	913.0	913.0	669.2
93	BDP260	BDP260LED55-4S722Premium DM50 BL2	3618	41.0	88.2	1.367	1.367	1.025	1.025	0.752	1349.2	1011.7	1011.7	742.2
94	BDP260	BDP260LED59-4S722Premium DM50 BL2	4020	44.0	91.4	1.467	1.467	1.1	1.1	0.807	1447.9	1085.7	1085.7	796.5

95	BDP260	BDP260LED64-4S722Premium DM50 BL2	4224	48.0	88.0	1.6	1.6	1.2	1.2	0.88	1579.2	1184.4	1184.4	868.6
96	BDP260	BDP260LED69-4S722Premium DM50 BL2	4620	52.0	88.8	1.733	1.733	1.3	1.3	0.953	1710.5	1283.1	1283.1	940.6
97	BDP260	BDP260LED74-4S722Premium DM50 BL2	4884	56.0	87.2	1.867	1.867	1.4	1.4	1.027	1842.7	1381.8	1381.8	1013.6

PEP ECOPASSPORT ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ($PGSF$), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

- Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table 3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

- Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

Table 4: Impact per scaling factor (PEP EcoPassport aligned)

	12NC or Product Family Code	Description	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDP260	BDP260LED8-4S740Premium DM50 BL2	544	5.7	95.4	0.19	0.122	0.091	0.091	0.067	120.4	89.8	89.8	66.1
2	BDP260	BDP260LED10-4S740Premium DM50 BL2	680	6.9	98.6	0.23	0.118	0.088	0.088	0.065	116.5	86.9	86.9	64.2
3	BDP260	BDP260LED12-4S740Premium DM50 BL2	816	7.9	103.3	0.263	0.113	0.085	0.085	0.062	111.5	83.9	83.9	61.2
4	BDP260	BDP260LED14-4S740Premium DM50 BL2	952	8.9	107.0	0.297	0.109	0.082	0.082	0.06	107.6	80.9	80.9	59.2
5	BDP260	BDP260LED16-4S740Premium DM50 BL2	1088	10.0	108.8	0.333	0.107	0.08	0.08	0.059	105.6	79.0	79.0	58.2
6	BDP260	BDP260LED18-4S740Premium DM50 BL2	1224	11.2	109.3	0.373	0.107	0.08	0.08	0.059	105.6	79.0	79.0	58.2
7	BDP260	BDP260LED20-4S740Premium DM50 BL2	1360	12.4	109.7	0.413	0.106	0.08	0.08	0.058	104.6	79.0	79.0	57.2
8	BDP260	BDP260LED22-4S740Premium DM50 BL2	1496	13.4	111.6	0.447	0.105	0.079	0.079	0.058	103.6	78.0	78.0	57.2
9	BDP260	BDP260LED24-4S740Premium DM50 BL2	1632	14.8	110.3	0.493	0.106	0.08	0.08	0.058	104.6	79.0	79.0	57.2
10	BDP260	BDP260LED27-4S740Premium DM50 BL2	1836	16.6	110.6	0.553	0.106	0.08	0.08	0.058	104.6	79.0	79.0	57.2
11	BDP260	BDP260LED30-4S740Premium DM50 BL2	2040	18.6	109.7	0.62	0.107	0.08	0.08	0.059	105.6	79.0	79.0	58.2
12	BDP260	BDP260LED35-4S740Premium DM50 BL2	2380	22.0	108.2	0.733	0.108	0.081	0.081	0.059	106.6	79.9	79.9	58.2

13	BDP260	BDP260LED39-4S740Premium DM50 BL2	2613	23.0	113.6	0.767	0.103	0.077	0.077	0.057	101.7	76.0	76.0	56.3
14	BDP260	BDP260LED45-4S740Premium DM50 BL2	3015	27.0	111.7	0.9	0.104	0.078	0.078	0.057	102.6	77.0	77.0	56.3
15	BDP260	BDP260LED50-4S740Premium DM50 BL2	3350	30.0	111.7	1.0	0.104	0.078	0.078	0.057	102.6	77.0	77.0	56.3
16	BDP260	BDP260LED55-4S740Premium DM50 BL2	3752	33.0	113.7	1.1	0.102	0.076	0.076	0.056	100.7	75.0	75.0	55.3
17	BDP260	BDP260LED59-4S740Premium DM50 BL2	4020	36.0	111.7	1.2	0.104	0.078	0.078	0.057	102.6	77.0	77.0	56.3
18	BDP260	BDP260LED64-4S740Premium DM50 BL2	4288	39.5	108.6	1.317	0.108	0.081	0.081	0.059	106.6	79.9	79.9	58.2
19	BDP260	BDP260LED69-4S740Premium DM50 BL2	4690	38.5	121.8	1.283	0.096	0.072	0.072	0.053	94.8	71.1	71.1	52.3
20	BDP260	BDP260LED74-4S740Premium DM50 BL2	4958	41.5	119.5	1.383	0.098	0.074	0.074	0.054	96.7	73.0	73.0	53.3
21	BDP260	BDP260LED79-4S740Premium DM50 BL2	5226	44.5	117.4	1.483	0.099	0.074	0.074	0.054	97.7	73.0	73.0	53.3
22	BDP260	BDP260LED84-4S740Premium DM50 BL2	5544	47.5	116.7	1.583	0.1	0.075	0.075	0.055	98.7	74.0	74.0	54.3
23	BDP260	BDP260LED90-4S740Premium DM50 BL2	5940	51.0	116.5	1.7	0.1	0.075	0.075	0.055	98.7	74.0	74.0	54.3
24	BDP260	BDP260LED94-4S740Premium DM50 BL2	6204	53.0	117.1	1.767	0.099	0.074	0.074	0.054	97.7	73.0	73.0	53.3
25	BDP260	BDP260LED100-4S740Premium DM50 BL2	6500	57.0	114.0	1.9	0.103	0.077	0.077	0.057	101.7	76.0	76.0	56.3
26	BDP260	BDP260LED8-4S730Premium DM50 BL2	544	6.0	90.7	0.2	0.129	0.097	0.097	0.071	127.3	95.7	95.7	70.1

27	BDP260	BDP260LED10-4S730Premium DM50 BL2	680	7.2	94.4	0.24	0.124	0.093	0.093	0.068	122.4	91.8	91.8	67.1
28	BDP260	BDP260LED12-4S730Premium DM50 BL2	816	8.2	99.5	0.273	0.117	0.088	0.088	0.064	115.5	86.9	86.9	63.2
29	BDP260	BDP260LED14-4S730Premium DM50 BL2	952	9.4	101.3	0.313	0.115	0.086	0.086	0.063	113.5	84.9	84.9	62.2
30	BDP260	BDP260LED16-4S730Premium DM50 BL2	1088	10.6	102.6	0.353	0.114	0.086	0.086	0.063	112.5	84.9	84.9	62.2
31	BDP260	BDP260LED18-4S730Premium DM50 BL2	1224	11.8	103.7	0.393	0.112	0.084	0.084	0.062	110.5	82.9	82.9	61.2
32	BDP260	BDP260LED20-4S730Premium DM50 BL2	1360	13.0	104.6	0.433	0.111	0.083	0.083	0.061	109.6	81.9	81.9	60.2
33	BDP260	BDP260LED22-4S730Premium DM50 BL2	1496	14.2	105.4	0.473	0.111	0.083	0.083	0.061	109.6	81.9	81.9	60.2
34	BDP260	BDP260LED24-4S730Premium DM50 BL2	1632	15.6	104.6	0.52	0.111	0.083	0.083	0.061	109.6	81.9	81.9	60.2
35	BDP260	BDP260LED27-4S730Premium DM50 BL2	1836	17.6	104.3	0.587	0.112	0.084	0.084	0.062	110.5	82.9	82.9	61.2
36	BDP260	BDP260LED30-4S730Premium DM50 BL2	2040	19.8	103.0	0.66	0.114	0.086	0.086	0.063	112.5	84.9	84.9	62.2
37	BDP260	BDP260LED35-4S730Premium DM50 BL2	2380	23.5	101.3	0.783	0.115	0.086	0.086	0.063	113.5	84.9	84.9	62.2
38	BDP260	BDP260LED39-4S730Premium DM50 BL2	2613	24.5	106.7	0.817	0.109	0.082	0.082	0.06	107.6	80.9	80.9	59.2
39	BDP260	BDP260LED45-4S730Premium DM50 BL2	3015	28.5	105.8	0.95	0.11	0.083	0.083	0.061	108.6	81.9	81.9	60.2
40	BDP260	BDP260LED50-4S730Premium DM50 BL2	3350	32.0	104.7	1.067	0.111	0.083	0.083	0.061	109.6	81.9	81.9	60.2

41	BDP260	BDP260LED55-4S730Premium DM50 BL2	3752	35.5	105.7	1.183	0.11	0.083	0.083	0.061	108.6	81.9	81.9	60.2
42	BDP260	BDP260LED59-4S730Premium DM50 BL2	4020	38.5	104.4	1.283	0.112	0.084	0.084	0.062	110.5	82.9	82.9	61.2
43	BDP260	BDP260LED64-4S730Premium DM50 BL2	4288	38.0	112.8	1.267	0.104	0.078	0.078	0.057	102.6	77.0	77.0	56.3
44	BDP260	BDP260LED69-4S730Premium DM50 BL2	4690	41.0	114.4	1.367	0.103	0.077	0.077	0.057	101.7	76.0	76.0	56.3
45	BDP260	BDP260LED74-4S730Premium DM50 BL2	4958	44.0	112.7	1.467	0.104	0.078	0.078	0.057	102.6	77.0	77.0	56.3
46	BDP260	BDP260LED79-4S730Premium DM50 BL2	5280	47.5	111.2	1.583	0.104	0.078	0.078	0.057	102.6	77.0	77.0	56.3
47	BDP260	BDP260LED84-4S730Premium DM50 BL2	5544	51.0	108.7	1.7	0.107	0.08	0.08	0.059	105.6	79.0	79.0	58.2
48	BDP260	BDP260LED90-4S730Premium DM50 BL2	5940	54.0	110.0	1.8	0.106	0.08	0.08	0.058	104.6	79.0	79.0	57.2
49	BDP260	BDP260LED94-4S730Premium DM50 BL2	6110	57.0	107.2	1.9	0.108	0.081	0.081	0.059	106.6	79.9	79.9	58.2
50	BDP260	BDP260LED100-4S730Premium DM50 BL2	6500	61.0	106.6	2.033	0.11	0.083	0.083	0.061	108.6	81.9	81.9	60.2
51	BDP260	BDP260LED7-4S727Premium DM50 BL2	476	5.9	80.7	0.197	0.145	0.109	0.109	0.08	143.1	107.6	107.6	79.0
52	BDP260	BDP260LED9-4S727Premium DM50 BL2	612	7.2	85.0	0.24	0.137	0.103	0.103	0.075	135.2	101.7	101.7	74.0
53	BDP260	BDP260LED11-4S727Premium DM50 BL2	748	8.4	89.0	0.28	0.131	0.098	0.098	0.072	129.3	96.7	96.7	71.1
54	BDP260	BDP260LED13-4S727Premium DM50 BL2	884	9.7	91.1	0.323	0.128	0.096	0.096	0.07	126.3	94.8	94.8	69.1

55	BDP260	BDP260LED14-4S727Premium DM50 BL2	952	10.4	91.5	0.347	0.128	0.096	0.096	0.07	126.3	94.8	94.8	69.1
56	BDP260	BDP260LED16-4S727Premium DM50 BL2	1088	11.8	92.2	0.393	0.127	0.095	0.095	0.07	125.3	93.8	93.8	69.1
57	BDP260	BDP260LED18-4S727Premium DM50 BL2	1224	13.2	92.7	0.44	0.126	0.095	0.095	0.069	124.4	93.8	93.8	68.1
58	BDP260	BDP260LED20-4S727Premium DM50 BL2	1360	14.6	93.2	0.487	0.125	0.094	0.094	0.069	123.4	92.8	92.8	68.1
59	BDP260	BDP260LED22-4S727Premium DM50 BL2	1496	16.0	93.5	0.533	0.125	0.094	0.094	0.069	123.4	92.8	92.8	68.1
60	BDP260	BDP260LED24-4S727Premium DM50 BL2	1632	17.6	92.7	0.587	0.126	0.095	0.095	0.069	124.4	93.8	93.8	68.1
61	BDP260	BDP260LED27-4S727Premium DM50 BL2	1836	20.0	91.8	0.667	0.127	0.095	0.095	0.07	125.3	93.8	93.8	69.1
62	BDP260	BDP260LED30-4S727Premium DM50 BL2	2040	22.5	90.7	0.75	0.129	0.097	0.097	0.071	127.3	95.7	95.7	70.1
63	BDP260	BDP260LED35-4S727Premium DM50 BL2	2345	26.5	88.5	0.883	0.132	0.099	0.099	0.073	130.3	97.7	97.7	72.1
64	BDP260	BDP260LED39-4S727Premium DM50 BL2	2613	27.5	95.0	0.917	0.123	0.092	0.092	0.068	121.4	90.8	90.8	67.1
65	BDP260	BDP260LED45-4S727Premium DM50 BL2	3015	32.0	94.2	1.067	0.124	0.093	0.093	0.068	122.4	91.8	91.8	67.1
66	BDP260	BDP260LED50-4S727Premium DM50 BL2	3350	36.0	93.1	1.2	0.125	0.094	0.094	0.069	123.4	92.8	92.8	68.1
67	BDP260	BDP260LED55-4S727Premium DM50 BL2	3696	40.5	91.3	1.35	0.128	0.096	0.096	0.07	126.3	94.8	94.8	69.1
68	BDP260	BDP260LED59-4S727Premium DM50 BL2	4020	39.5	101.8	1.317	0.115	0.086	0.086	0.063	113.5	84.9	84.9	62.2

69	BDP260	BDP260LED64-4S727Premium DM50 BL2	4288	42.5	100.9	1.417	0.116	0.087	0.087	0.064	114.5	85.9	85.9	63.2
70	BDP260	BDP260LED69-4S727Premium DM50 BL2	4690	46.5	100.9	1.55	0.116	0.087	0.087	0.064	114.5	85.9	85.9	63.2
71	BDP260	BDP260LED74-4S727Premium DM50 BL2	4884	50.0	97.7	1.667	0.12	0.09	0.09	0.066	118.4	88.8	88.8	65.1
72	BDP260	BDP260LED79-4S727Premium DM50 BL2	5280	53.0	99.6	1.767	0.117	0.088	0.088	0.064	115.5	86.9	86.9	63.2
73	BDP260	BDP260LED84-4S727Premium DM50 BL2	5460	57.0	95.8	1.9	0.122	0.091	0.091	0.067	120.4	89.8	89.8	66.1
74	BDP260	BDP260LED90-4S727Premium DM50 BL2	5850	62.0	94.4	2.067	0.124	0.093	0.093	0.068	122.4	91.8	91.8	67.1
75	BDP260	BDP260LED94-4S727Premium DM50 BL2	6110	65.0	94.0	2.167	0.124	0.093	0.093	0.068	122.4	91.8	91.8	67.1
76	BDP260	BDP260LED100-4S727Premium DM50 BL2	6400	69.0	92.8	2.3	0.127	0.095	0.095	0.07	125.3	93.8	93.8	69.1
77	BDP260	BDP260LED7-4S722Premium DM50 BL2	476	6.5	73.2	0.217	0.159	0.119	0.119	0.087	156.9	117.5	117.5	85.9
78	BDP260	BDP260LED9-4S722Premium DM50 BL2	612	7.8	78.5	0.26	0.149	0.112	0.112	0.082	147.1	110.5	110.5	80.9
79	BDP260	BDP260LED11-4S722Premium DM50 BL2	748	9.2	81.3	0.307	0.144	0.108	0.108	0.079	142.1	106.6	106.6	78.0
80	BDP260	BDP260LED12-4S722Premium DM50 BL2	816	10.0	81.6	0.333	0.143	0.107	0.107	0.079	141.1	105.6	105.6	78.0
81	BDP260	BDP260LED14-4S722Premium DM50 BL2	952	11.6	82.1	0.387	0.142	0.106	0.106	0.078	140.2	104.6	104.6	77.0
82	BDP260	BDP260LED16-4S722Premium DM50 BL2	1088	13.0	83.7	0.433	0.139	0.104	0.104	0.076	137.2	102.6	102.6	75.0

83	BDP260	BDP260LED18-4S722Premium DM50 BL2	1224	14.6	83.8	0.487	0.139	0.104	0.104	0.076	137.2	102.6	102.6	75.0
84	BDP260	BDP260LED20-4S722Premium DM50 BL2	1360	16.4	82.9	0.547	0.141	0.106	0.106	0.078	139.2	104.6	104.6	77.0
85	BDP260	BDP260LED22-4S722Premium DM50 BL2	1496	18.0	83.1	0.6	0.14	0.105	0.105	0.077	138.2	103.6	103.6	76.0
86	BDP260	BDP260LED24-4S722Premium DM50 BL2	1632	19.8	82.4	0.66	0.141	0.106	0.106	0.078	139.2	104.6	104.6	77.0
87	BDP260	BDP260LED27-4S722Premium DM50 BL2	1836	22.5	81.6	0.75	0.143	0.107	0.107	0.079	141.1	105.6	105.6	78.0
88	BDP260	BDP260LED30-4S722Premium DM50 BL2	2010	25.5	78.8	0.85	0.148	0.111	0.111	0.081	146.1	109.6	109.6	79.9
89	BDP260	BDP260LED35-4S722Premium DM50 BL2	2345	27.5	85.3	0.917	0.137	0.103	0.103	0.075	135.2	101.7	101.7	74.0
90	BDP260	BDP260LED39-4S722Premium DM50 BL2	2613	31.0	84.3	1.033	0.138	0.104	0.104	0.076	136.2	102.6	102.6	75.0
91	BDP260	BDP260LED45-4S722Premium DM50 BL2	3015	36.5	82.6	1.217	0.141	0.106	0.106	0.078	139.2	104.6	104.6	77.0
92	BDP260	BDP260LED50-4S722Premium DM50 BL2	3350	37.0	90.5	1.233	0.128	0.096	0.096	0.07	126.3	94.8	94.8	69.1
93	BDP260	BDP260LED55-4S722Premium DM50 BL2	3618	41.0	88.2	1.367	0.133	0.1	0.1	0.073	131.3	98.7	98.7	72.1
94	BDP260	BDP260LED59-4S722Premium DM50 BL2	4020	44.0	91.4	1.467	0.128	0.096	0.096	0.07	126.3	94.8	94.8	69.1
95	BDP260	BDP260LED64-4S722Premium DM50 BL2	4224	48.0	88.0	1.6	0.133	0.1	0.1	0.073	131.3	98.7	98.7	72.1
96	BDP260	BDP260LED69-4S722Premium DM50 BL2	4620	52.0	88.8	1.733	0.132	0.099	0.099	0.073	130.3	97.7	97.7	72.1

97	BDP260	BDP260LED74-4S722Premium DM50 BL2	4884	56.0	87.2	1.867	0.134	0.101	0.101	0.074	132.3	99.7	99.7	73.0
----	--------	--------------------------------------	------	------	------	-------	-------	-------	-------	-------	-------	------	------	------