



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Clearflood gen2 Large

BVP657

Signify N.V.



EPD HUB
Publishing date 2024-10-15

The Signify logo, consisting of a green circular icon containing a white lowercase letter 's' followed by the word "signify" in a green sans-serif font.

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Signify
Address	5600 VB Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Electrical product
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

PRODUCT

Product name	Clearflood gen2 Large
Additional labels	BVP657
Product reference	910771137547
Place of production	SPAIN
Period for data	2024
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	Not applicable

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 Unit
Declared unit mass	27.5 kg
GWP-fossil, A1-A3 (kgCO2e)	5.41E+02
GWP-total, A1-A3 (kgCO2e)	5.34E+02
Secondary material, inputs (%)	6.23
Secondary material, outputs (%)	60.3
Total energy use, A1-A3 (kWh)	1660
Net fresh water use, A1-A3 (m3e)	2.24

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people's lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

PRODUCT DESCRIPTION

This new generation of Clearflood range brings the total cost of ownership of your project to the next level. The range comes in 3 sizes (BVP655, BVP656, BVP657) with several finishing and serviceability options, and leverages on the light engine of our Recreational Sports & Area flagship floodlight. This light engine is optimized for sports applications, as well as large areas, such as logistical hubs, outdoor car parks and storage area. Now an innovative design approach allows the availability of connected options such as the SR socket, fully integrated on the floodlight housing, and a multi-sensor on the bracket. The product range is compatible with Interact systems.

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	72.41	EU
Minerals	19.21	EU
Fossil materials	8.38	EU
Bio-based materials	0	Not applicable

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	1.645

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 Unit
Mass per declared unit	27.5 kg
Functional unit	76587 Lumens over 100000 hours
Reference service life	100000 hours

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0.1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage		Assembly stage		Use stage							End of life stage				Beyond the system boundaries			
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Signify's manufacturing facilities are included in this stage. The product is made of metals, plastics, and electronic components. All components are transported to Signify's production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible for the production of the studied luminaire. Thus, it is possible to allocate it according to the weight of the product analysed in this study. Some of the

waste are due to ancillary materials used during manufacturing while the rest is due to material losses.

TRANSPORT AND INSTALLATION (A4-A5)

Transport distances were calculated on the base of the supplier location and manufacturing location and then made a cumulative group choosing the conservative scenario. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.


PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from EU's electricity grid mix (B6). The total power consumption of the reference product is calculated as follows: Wattage x Reference lifetime = kWh consumed throughout the entire use phase B6.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

SYSTEM BOUNDARY

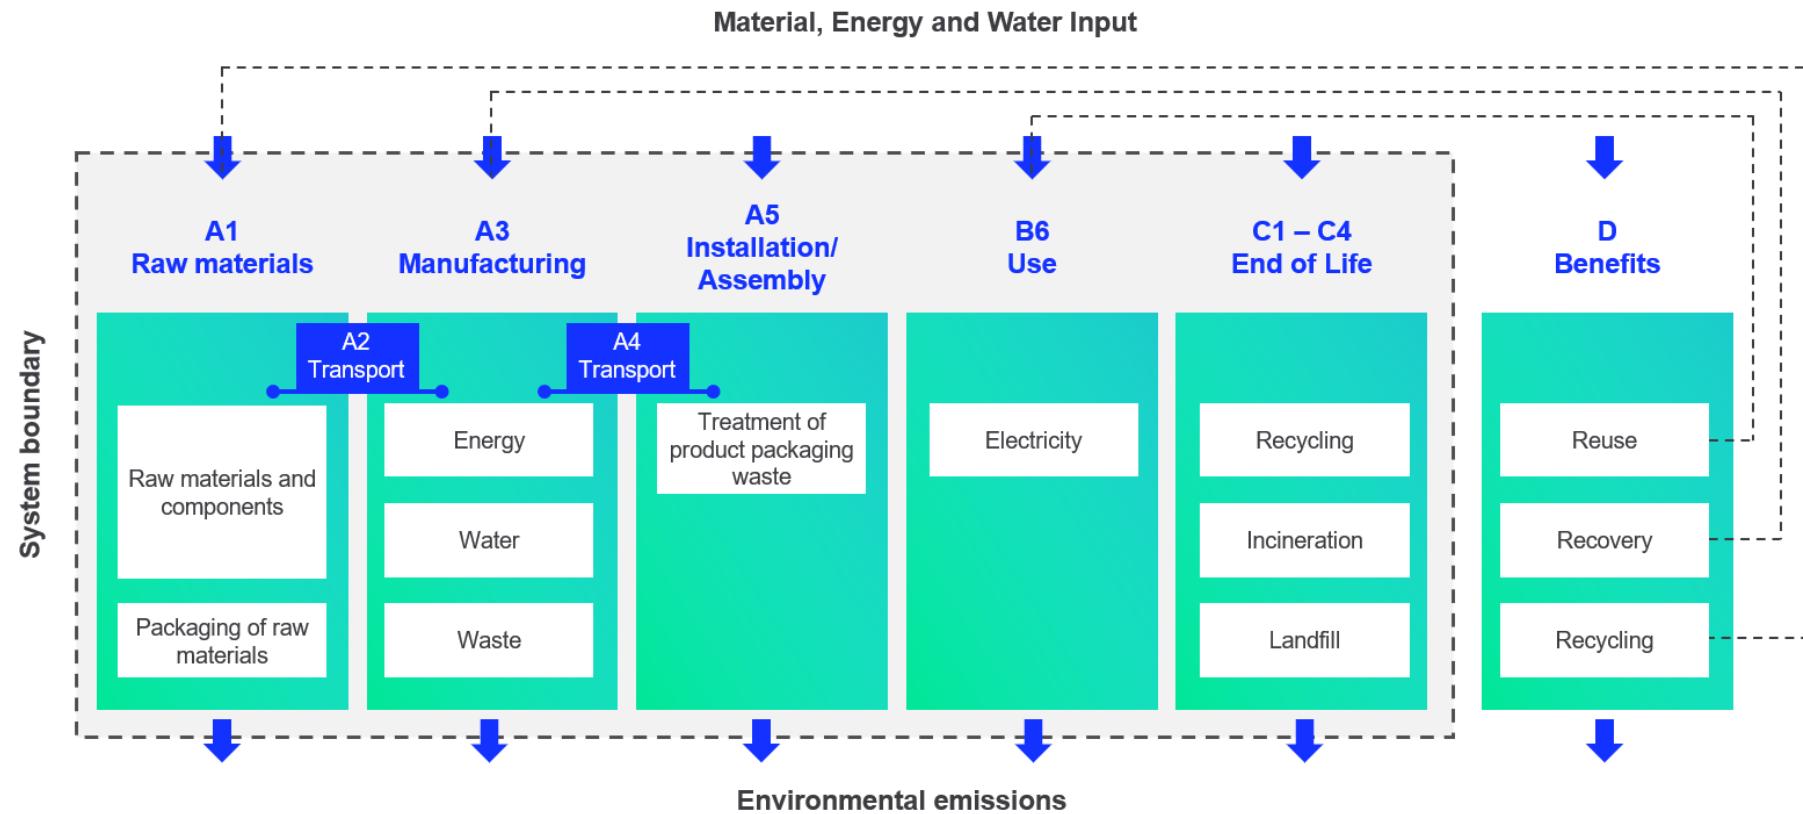

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent 3.8 database was used as the source of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	5.28E+02	5.98E+00	4.32E-01	5.34E+02	5.98E+00	6.09E+00	MNR	MNR	MNR	MNR	MNR	2.08E+04	MNR	MNR	3.91E-01	1.60E+00	1.89E+00	-2.54E+02
GWP – fossil	kg CO ₂ e	5.29E+02	5.98E+00	6.34E+00	5.41E+02	5.98E+00	1.55E-01	MNR	MNR	MNR	MNR	MNR	2.07E+04	MNR	MNR	3.91E-01	1.59E+00	1.00E+00	-2.54E+02
GWP – biogenic	kg CO ₂ e	-8.82E-01	0.00E+00	-5.94E+00	-6.82E+00	2.31E-03	5.94E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	8.82E-01	-2.80E-02
GWP – LULUC	kg CO ₂ e	3.43E-01	2.21E-03	2.80E-02	3.73E-01	2.21E-03	5.31E-05	MNR	MNR	MNR	MNR	MNR	4.85E+01	MNR	MNR	1.44E-04	5.31E-04	3.89E-04	-1.93E-02
Ozone depletion pot.	kg CFC-11e	2.00E-05	1.38E-06	8.34E-07	2.22E-05	1.38E-06	1.56E-08	MNR	MNR	MNR	MNR	MNR	1.05E-03	MNR	MNR	8.99E-08	4.25E-08	4.10E-08	-6.88E-06
Acidification potential	mol H ⁺ e	4.80E+00	2.53E-02	2.80E-02	4.86E+00	2.53E-02	1.22E-03	MNR	MNR	MNR	MNR	MNR	1.19E+02	MNR	MNR	1.66E-03	4.42E-03	1.88E-03	-2.56E+00
EP-freshwater ²⁾	kg Pe	3.52E-02	4.90E-05	2.84E-04	3.55E-02	4.90E-05	1.63E-06	MNR	MNR	MNR	MNR	MNR	2.20E+00	MNR	MNR	3.20E-06	1.66E-05	2.14E-05	-1.59E-02
EP-marine	kg Ne	5.92E-01	7.52E-03	1.19E-02	6.11E-01	7.52E-03	5.15E-04	MNR	MNR	MNR	MNR	MNR	1.57E+01	MNR	MNR	4.92E-04	1.01E-03	4.42E-03	-2.83E-01
EP-terrestrial	mol Ne	6.66E+00	8.30E-02	7.73E-02	6.82E+00	8.30E-02	5.34E-03	MNR	MNR	MNR	MNR	MNR	1.79E+02	MNR	MNR	5.43E-03	1.15E-02	5.78E-03	-3.26E+00
POCP ("smog") ³⁾	kg NMVOCe	1.95E+00	2.66E-02	2.49E-02	2.00E+00	2.66E-02	1.34E-03	MNR	MNR	MNR	MNR	MNR	4.89E+01	MNR	MNR	1.74E-03	3.12E-03	2.34E-03	-9.42E-01
ADP-minerals & metals ⁴⁾	kg Sbe	1.15E-02	1.40E-05	5.87E-05	1.16E-02	1.40E-05	5.13E-07	MNR	MNR	MNR	MNR	MNR	1.94E-01	MNR	MNR	9.17E-07	4.00E-05	7.79E-07	-1.54E-03
ADP-fossil resources	MJ	5.48E+03	8.98E+01	9.74E+01	5.67E+03	8.98E+01	1.21E+00	MNR	MNR	MNR	MNR	MNR	4.41E+05	MNR	MNR	5.87E+00	4.79E+00	4.02E+00	-2.48E+03
Water use ⁵⁾	m ³ e depr.	9.34E+01	4.02E-01	2.92E+00	9.67E+01	4.02E-01	2.86E-01	MNR	MNR	MNR	MNR	MNR	1.21E+04	MNR	MNR	2.63E-02	1.25E-01	1.97E-01	-1.64E+01

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	3.22E-05	6.89E-07	4.46E-07	3.33E-05	6.89E-07	1.13E-08	MNR	MNR	MNR	MNR	MNR	3.89E-04	MNR	MNR	4.51E-08	5.77E-08	3.28E-08	-1.37E-05
Ionizing radiation ⁶⁾	kBq U235e	3.42E+01	4.28E-01	2.96E-01	3.49E+01	4.28E-01	4.39E-03	MNR	MNR	MNR	MNR	MNR	1.20E+04	MNR	MNR	2.80E-02	2.91E-02	2.18E-02	-1.49E+01
Ecotoxicity (freshwater)	CTUe	1.61E+04	8.08E+01	2.28E+02	1.64E+04	8.08E+01	8.37E+00	MNR	MNR	MNR	MNR	MNR	3.00E+05	MNR	MNR	5.28E+00	2.29E+01	1.76E+03	-4.68E+03
Human toxicity, cancer	CTUh	6.34E-07	1.98E-09	4.11E-09	6.40E-07	1.98E-09	3.76E-10	MNR	MNR	MNR	MNR	MNR	9.83E-06	MNR	MNR	1.30E-10	7.09E-10	1.09E-09	7.27E-09
Human tox. non-cancer	CTUh	1.42E-05	8.00E-08	8.89E-08	1.43E-05	8.00E-08	1.57E-08	MNR	MNR	MNR	MNR	MNR	3.23E-04	MNR	MNR	5.23E-09	2.99E-08	6.13E-08	-4.94E-06
SQP ⁷⁾	-	1.42E+03	1.03E+02	2.45E+02	1.77E+03	1.03E+02	6.58E-01	MNR	MNR	MNR	MNR	MNR	7.98E+04	MNR	MNR	6.77E+00	8.69E+00	6.21E+00	-4.60E+02

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	2.53E+02	1.01E+00	6.62E+01	3.20E+02	1.01E+00	4.00E-02	MNR	MNR	MNR	MNR	MNR	8.99E+04	MNR	MNR	6.62E-02	6.85E-01	1.76E-01	-3.26E+01
Renew. PER as material	MJ	1.10E+01	0.00E+00	5.20E+01	6.30E+01	0.00E+00	-5.20E+01	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	-9.74E-01	-1.00E+01	0.00E+00
Total use of renew. PER	MJ	2.64E+02	1.01E+00	1.18E+02	3.83E+02	1.01E+00	-5.20E+01	MNR	MNR	MNR	MNR	MNR	8.99E+04	MNR	MNR	6.62E-02	-2.88E-01	-9.84E+00	-3.26E+01
Non-re. PER as energy	MJ	5.48E+03	8.98E+01	8.57E+01	5.66E+03	8.98E+01	1.21E+00	MNR	MNR	MNR	MNR	MNR	4.40E+05	MNR	MNR	5.87E+00	4.79E+00	4.02E+00	-2.48E+03
Non-re. PER as material	MJ	6.83E+01	0.00E+00	4.31E-01	6.88E+01	0.00E+00	-4.31E-01	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	-3.12E+01	-3.71E+01	1.04E-01
Total use of non-re. PER	MJ	5.55E+03	8.98E+01	8.61E+01	5.73E+03	8.98E+01	7.78E-01	MNR	MNR	MNR	MNR	MNR	4.40E+05	MNR	MNR	5.87E+00	-2.64E+01	-3.31E+01	-2.48E+03
Secondary materials	kg	1.71E+00	2.49E-02	4.04E+00	5.78E+00	2.49E-02	1.44E-03	MNR	MNR	MNR	MNR	MNR	4.54E+01	MNR	MNR	1.63E-03	4.77E-03	9.69E-03	1.04E+01
Renew. secondary fuels	MJ	1.13E-01	2.52E-04	2.86E-01	4.00E-01	2.52E-04	2.40E-05	MNR	MNR	MNR	MNR	MNR	3.69E-01	MNR	MNR	1.65E-05	2.44E-04	7.30E-05	-4.45E-03
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	2.14E+00	1.16E-02	9.06E-02	2.24E+00	1.16E-02	5.06E-03	MNR	MNR	MNR	MNR	MNR	3.80E+02	MNR	MNR	7.61E-04	4.06E-03	2.68E-03	-7.64E-01

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	8.42E+01	1.19E-01	3.32E-01	8.46E+01	1.19E-01	1.61E-03	MNR	MNR	MNR	MNR	MNR	1.58E+03	MNR	MNR	7.79E-03	3.42E-02	3.38E-02	-4.02E+01
Non-hazardous waste	kg	1.34E+03	1.96E+00	5.90E+00	1.34E+03	1.96E+00	4.05E+00	MNR	MNR	MNR	MNR	MNR	1.00E+05	MNR	MNR	1.28E-01	1.71E+00	1.12E+01	-7.25E+02
Radioactive waste	kg	1.31E-02	6.01E-04	2.15E-04	1.39E-02	6.01E-04	1.94E-06	MNR	MNR	MNR	MNR	MNR	3.21E+00	MNR	MNR	3.93E-05	1.99E-05	0.00E+00	-5.47E-03

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	1.61E+01	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	5.08E-01	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	1.54E+00	1.54E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	1.13E+01	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	5.19E+02	5.92E+00	6.52E+00	5.31E+02	5.92E+00	1.48E-01	MNR	MNR	MNR	MNR	MNR	2.05E+04	MNR	MNR	3.87E-01	1.59E+00	2.75E+00	-2.49E+02
Ozone depletion Pot.	kg CFC-11e	1.73E-05	1.09E-06	7.05E-07	1.91E-05	1.09E-06	1.36E-08	MNR	MNR	MNR	MNR	MNR	9.13E-04	MNR	MNR	7.12E-08	3.45E-08	3.29E-08	-5.84E-06
Acidification	kg SO ₂ e	4.10E+00	1.97E-02	2.07E-02	4.14E+00	1.97E-02	8.88E-04	MNR	MNR	MNR	MNR	MNR	1.01E+02	MNR	MNR	1.29E-03	3.54E-03	1.47E-03	-2.20E+00
Eutrophication	kg PO ₄ ³⁻ e	1.27E+00	4.48E-03	1.33E-02	1.29E+00	4.48E-03	6.61E-04	MNR	MNR	MNR	MNR	MNR	7.73E+01	MNR	MNR	2.93E-04	1.20E-03	1.16E-02	-6.19E-01
POCP ("smog")	kg C ₂ H ₄ e	2.21E-01	7.68E-04	1.36E-03	2.23E-01	7.68E-04	2.78E-05	MNR	MNR	MNR	MNR	MNR	4.11E+00	MNR	MNR	5.02E-05	1.32E-04	4.90E-04	-1.09E-01
ADP-elements	kg Sbe	1.27E-02	1.36E-05	5.47E-05	1.27E-02	1.36E-05	4.02E-07	MNR	MNR	MNR	MNR	MNR	1.93E-01	MNR	MNR	8.88E-07	3.99E-05	7.34E-07	-1.52E-03
ADP-fossil	MJ	5.55E+03	8.98E+01	9.69E+01	5.74E+03	8.98E+01	1.21E+00	MNR	MNR	MNR	MNR	MNR	4.40E+05	MNR	MNR	5.87E+00	4.79E+00	4.01E+00	-2.48E+03

APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family.

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in question P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according to the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table A1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

Table A2 Scaled GWP per scaling factor (EPD Hub aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
BVP657 LED650-4S/727 A35-MB ALU	58659.0	437.9	134.0	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A35-NB ALU	58680.0	437.9	134.0	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A35-NMB ALU	58670.0	437.9	134.0	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A35-NWB ALU	58672.0	437.9	134.0	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A35-VWB ALU	57832.0	437.9	132.1	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A35-WB ALU	58663.0	437.9	134.0	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A55-MB ALU	58257.0	437.9	133.0	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A55-NB ALU	57488.0	437.9	131.3	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A55-NMB ALU	57874.0	437.9	132.2	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A55-NWB ALU	57778.0	437.9	131.9	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A55-WB ALU	58066.0	437.9	132.6	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A65-NB ALU	56778.0	437.9	129.7	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A65-NWB ALU	56077.0	437.9	128.1	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A65-VWB ALU	55735.0	437.9	127.3	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 A65-WB ALU	55373.0	437.9	126.5	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 DW10 ALU	56785.0	437.9	129.7	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2
BVP657 LED650-4S/727 DW30 ALU	57019.0	437.9	130.2	0.834	0.834	0.625	0.625	0.459	17347.2	13000.0	13000.0	9547.2

BVP657 LED650-4S/740 A35-MB ALU	57546.0	370.3	155.4	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A35-MB ALU	57627.0	357.3	161.3	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A35-NB ALU	57567.0	370.3	155.5	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A35-NB ALU	57648.0	357.3	161.3	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A35-NMB ALU	57558.0	370.3	155.4	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A35-NMB ALU	57639.0	357.3	161.3	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A35-NWB ALU	57560.0	370.3	155.4	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A35-NWB ALU	57641.0	357.3	161.3	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A35-VWB ALU	56735.0	370.3	153.2	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A35-VWB ALU	56815.0	357.3	159.0	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A35-WB ALU	57551.0	370.3	155.4	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A35-WB ALU	57631.0	357.3	161.3	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A55-MB ALU	57153.0	370.3	154.3	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A55-MB ALU	57233.0	357.3	160.2	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A55-NB ALU	56398.0	370.3	152.3	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A55-NB ALU	56477.0	357.3	158.1	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A55-NMB ALU	56776.0	370.3	153.3	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A55-NMB ALU	56856.0	357.3	159.1	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A55-NWB ALU	56682.0	370.3	153.1	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A55-NWB ALU	56762.0	357.3	158.9	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A55-WB ALU	56965.0	370.3	153.8	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A55-WB ALU	57045.0	357.3	159.7	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A65-NB ALU	55702.0	370.3	150.4	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A65-NB ALU	55780.0	357.3	156.1	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0

BVP657 LED650-4S/740 A65-NWB ALU	55014.0	370.3	148.6	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A65-NWB ALU	55091.0	357.3	154.2	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A65-VWB ALU	54678.0	370.3	147.7	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A65-VWB ALU	54755.0	357.3	153.2	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 A65-WB ALU	54324.0	370.3	146.7	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 A65-WB ALU	54400.0	357.3	152.3	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 DW10 ALU	55708.0	370.3	150.4	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 DW10 ALU	55786.0	357.3	156.1	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/740 DW30 ALU	55938.0	370.3	151.1	0.705	0.705	0.529	0.529	0.388	14664.0	11003.2	11003.2	8070.4
BVP657 LED650-4S/740 DW30 ALU	56017.0	357.3	156.8	0.681	0.681	0.511	0.511	0.375	14164.8	10628.8	10628.8	7800.0
BVP657 LED650-4S/840 A35-MB ALU	57919.0	396.0	146.3	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A35-NB ALU	57939.0	396.0	146.3	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A35-NMB ALU	57930.0	396.0	146.3	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A35-NWB ALU	57932.0	396.0	146.3	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A35-VWB ALU	57102.0	396.0	144.2	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A35-WB ALU	57923.0	396.0	146.3	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A55-MB ALU	57522.0	396.0	145.3	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A55-NB ALU	56762.0	396.0	143.3	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A55-NMB ALU	57143.0	396.0	144.3	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A55-NWB ALU	57049.0	396.0	144.1	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A55-WB ALU	57333.0	396.0	144.8	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A65-NB ALU	56062.0	396.0	141.6	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A65-NWB ALU	55369.0	396.0	139.8	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 A65-VWB ALU	55032.0	396.0	139.0	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0

BVP657 LED650-4S/840 A65-WB ALU	54675.0	396.0	138.1	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 DW10 ALU	56068.0	396.0	141.6	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED650-4S/840 DW30 ALU	56300.0	396.0	142.2	0.754	0.754	0.566	0.566	0.415	15683.2	11772.8	11772.8	8632.0
BVP657 LED750-4S/727 A35-MB ALU	66826.0	512.1	130.5	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A35-NB ALU	66850.0	512.1	130.5	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A35-NMB ALU	66839.0	512.1	130.5	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A35-NWB ALU	66841.0	512.1	130.5	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A35-VWB ALU	65884.0	512.1	128.7	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A35-WB ALU	66831.0	512.1	130.5	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A55-MB ALU	66369.0	512.1	129.6	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A55-NB ALU	65492.0	512.1	127.9	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A55-NMB ALU	65932.0	512.1	128.7	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A55-NWB ALU	65822.0	512.1	128.5	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A55-WB ALU	66151.0	512.1	129.2	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A65-NB ALU	64684.0	512.1	126.3	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A65-NWB ALU	63885.0	512.1	124.8	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A65-VWB ALU	63495.0	512.1	124.0	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 A65-WB ALU	63083.0	512.1	123.2	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 DW10 ALU	64691.0	512.1	126.3	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED750-4S/727 DW30 ALU	64958.0	512.1	126.8	0.976	0.976	0.732	0.732	0.537	20300.8	15225.6	15225.6	11169.6
BVP657 LED800-4S/840 A35-MB ALU	69973.0	498.3	140.4	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A35-NB ALU	69998.0	498.3	140.5	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A35-NMB ALU	69987.0	498.3	140.5	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A35-NWB ALU	69989.0	498.3	140.5	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6

BVP657 LED800-4S/840 A35-VWB ALU	68987.0	498.3	138.4	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A35-WB ALU	69978.0	498.3	140.4	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A55-MB ALU	69494.0	498.3	139.5	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A55-NB ALU	68576.0	498.3	137.6	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A55-NMB ALU	69037.0	498.3	138.5	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A55-NWB ALU	68922.0	498.3	138.3	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A55-WB ALU	69266.0	498.3	139.0	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A65-NB ALU	67730.0	498.3	135.9	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A65-NWB ALU	66893.0	498.3	134.2	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A65-VWB ALU	66486.0	498.3	133.4	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 A65-WB ALU	66054.0	498.3	132.6	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 DW10 ALU	67738.0	498.3	135.9	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED800-4S/840 DW30 ALU	68017.0	498.3	136.5	0.949	0.949	0.712	0.712	0.522	19739.2	14809.6	14809.6	10857.6
BVP657 LED930-4S/740 A35-MB ALU	81131.0	524.9	154.6	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A35-NB ALU	81160.0	524.9	154.6	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A35-NMB ALU	81147.0	524.9	154.6	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A35-NWB ALU	81150.0	524.9	154.6	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A35-VWB ALU	79987.0	524.9	152.4	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A35-WB ALU	81137.0	524.9	154.6	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A55-MB ALU	80576.0	524.9	153.5	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A55-NB ALU	79511.0	524.9	151.5	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A55-NMB ALU	80045.0	524.9	152.5	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A55-NWB ALU	79913.0	524.9	152.2	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A55-WB ALU	80311.0	524.9	153.0	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0

BVP657 LED930-4S/740 A65-NB ALU	78530.0	524.9	149.6	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A65-NWB ALU	77560.0	524.9	147.8	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A65-VWB ALU	77087.0	524.9	146.9	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 A65-WB ALU	76587.0	524.9	145.9	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 DW10 ALU	78539.0	524.9	149.6	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0
BVP657 LED930-4S/740 DW30 ALU	78863.0	524.9	150.2	1.0	1.0	0.75	0.75	0.55	20800.0	15600.0	15600.0	11440.0

* Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" are valid.

APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in question P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminaire (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor (PGSF), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

4. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table A3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

5. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled GWP} = \text{GWP}_{\text{case}} * \text{TSF}$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Signify directly for more information.

Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
BVP657 LED650-4S/727 A35-MB ALU	58659.0	437.9	134.0	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A35-NB ALU	58680.0	437.9	134.0	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A35-NMB ALU	58670.0	437.9	134.0	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A35-NWB ALU	58672.0	437.9	134.0	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A35-VWB ALU	57832.0	437.9	132.1	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4

BVP657 LED650-4S/727 A35-WB ALU	58663.0	437.9	134.0	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A55-MB ALU	58257.0	437.9	133.0	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A55-NB ALU	57488.0	437.9	131.3	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A55-NMB ALU	57874.0	437.9	132.2	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A55-NWB ALU	57778.0	437.9	131.9	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A55-WB ALU	58066.0	437.9	132.6	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A65-NB ALU	56778.0	437.9	129.7	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A65-NWB ALU	56077.0	437.9	128.1	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A65-VWB ALU	55735.0	437.9	127.3	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 A65-WB ALU	55373.0	437.9	126.5	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 DW10 ALU	56785.0	437.9	129.7	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/727 DW30 ALU	57019.0	437.9	130.2	0.834	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/740 A35-MB ALU	57546.0	370.3	155.4	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A35-MB ALU	57627.0	357.3	161.3	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A35-NB ALU	57567.0	370.3	155.5	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A35-NB ALU	57648.0	357.3	161.3	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A35-NMB ALU	57558.0	370.3	155.4	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A35-NMB ALU	57639.0	357.3	161.3	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A35-NWB ALU	57560.0	370.3	155.4	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A35-NWB ALU	57641.0	357.3	161.3	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A35-VWB ALU	56735.0	370.3	153.2	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A35-VWB ALU	56815.0	357.3	159.0	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A35-WB ALU	57551.0	370.3	155.4	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A35-WB ALU	57631.0	357.3	161.3	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6

BVP657 LED650-4S/740 A55-MB ALU	57153.0	370.3	154.3	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A55-MB ALU	57233.0	357.3	160.2	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A55-NB ALU	56398.0	370.3	152.3	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A55-NB ALU	56477.0	357.3	158.1	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A55-NMB ALU	56776.0	370.3	153.3	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A55-NMB ALU	56856.0	357.3	159.1	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A55-NWB ALU	56682.0	370.3	153.1	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A55-NWB ALU	56762.0	357.3	158.9	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A55-WB ALU	56965.0	370.3	153.8	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A55-WB ALU	57045.0	357.3	159.7	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A65-NB ALU	55702.0	370.3	150.4	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A65-NB ALU	55780.0	357.3	156.1	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A65-NWB ALU	55014.0	370.3	148.6	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A65-NWB ALU	55091.0	357.3	154.2	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A65-VWB ALU	54678.0	370.3	147.7	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A65-VWB ALU	54755.0	357.3	153.2	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A65-WB ALU	54324.0	370.3	146.7	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 A65-WB ALU	54400.0	357.3	152.3	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 DW10 ALU	55708.0	370.3	150.4	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 DW10 ALU	55786.0	357.3	156.1	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 DW30 ALU	55938.0	370.3	151.1	0.705	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/740 DW30 ALU	56017.0	357.3	156.8	0.681	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED650-4S/840 A35-MB ALU	57919.0	396.0	146.3	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A35-NB ALU	57939.0	396.0	146.3	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4

BVP657 LED650-4S/840 A35-NMB ALU	57930.0	396.0	146.3	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A35-NWB ALU	57932.0	396.0	146.3	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A35-VWB ALU	57102.0	396.0	144.2	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A35-WB ALU	57923.0	396.0	146.3	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A55-MB ALU	57522.0	396.0	145.3	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A55-NB ALU	56762.0	396.0	143.3	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A55-NMB ALU	57143.0	396.0	144.3	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A55-NWB ALU	57049.0	396.0	144.1	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A55-WB ALU	57333.0	396.0	144.8	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A65-NB ALU	56062.0	396.0	141.6	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A65-NWB ALU	55369.0	396.0	139.8	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A65-VWB ALU	55032.0	396.0	139.0	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 A65-WB ALU	54675.0	396.0	138.1	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 DW10 ALU	56068.0	396.0	141.6	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED650-4S/840 DW30 ALU	56300.0	396.0	142.2	0.754	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A35-MB ALU	66826.0	512.1	130.5	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A35-NB ALU	66850.0	512.1	130.5	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A35-NMB ALU	66839.0	512.1	130.5	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A35-NWB ALU	66841.0	512.1	130.5	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A35-VWB ALU	65884.0	512.1	128.7	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A35-WB ALU	66831.0	512.1	130.5	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A55-MB ALU	66369.0	512.1	129.6	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A55-NB ALU	65492.0	512.1	127.9	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A55-NMB ALU	65932.0	512.1	128.7	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4

BVP657 LED750-4S/727 A55-NWB ALU	65822.0	512.1	128.5	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A55-WB ALU	66151.0	512.1	129.2	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A65-NB ALU	64684.0	512.1	126.3	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A65-NWB ALU	63885.0	512.1	124.8	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 A65-VWB ALU	63495.0	512.1	124.0	0.976	0.006	0.005	0.005	0.003	124.8	104.0	104.0	62.4
BVP657 LED750-4S/727 A65-WB ALU	63083.0	512.1	123.2	0.976	0.006	0.005	0.005	0.003	124.8	104.0	104.0	62.4
BVP657 LED750-4S/727 DW10 ALU	64691.0	512.1	126.3	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED750-4S/727 DW30 ALU	64958.0	512.1	126.8	0.976	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A35-MB ALU	69973.0	498.3	140.4	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A35-NB ALU	69998.0	498.3	140.5	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A35-NMB ALU	69987.0	498.3	140.5	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A35-NWB ALU	69989.0	498.3	140.5	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A35-VWB ALU	68987.0	498.3	138.4	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A35-WB ALU	69978.0	498.3	140.4	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A55-MB ALU	69494.0	498.3	139.5	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A55-NB ALU	68576.0	498.3	137.6	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A55-NMB ALU	69037.0	498.3	138.5	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A55-NWB ALU	68922.0	498.3	138.3	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A55-WB ALU	69266.0	498.3	139.0	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A65-NB ALU	67730.0	498.3	135.9	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A65-NWB ALU	66893.0	498.3	134.2	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A65-VWB ALU	66486.0	498.3	133.4	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 A65-WB ALU	66054.0	498.3	132.6	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED800-4S/840 DW10 ALU	67738.0	498.3	135.9	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4

BVP657 LED800-4S/840 DW30 ALU	68017.0	498.3	136.5	0.949	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED930-4S/740 A35-MB ALU	81131.0	524.9	154.6	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A35-NB ALU	81160.0	524.9	154.6	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A35-NMB ALU	81147.0	524.9	154.6	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A35-NWB ALU	81150.0	524.9	154.6	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A35-VWB ALU	79987.0	524.9	152.4	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A35-WB ALU	81137.0	524.9	154.6	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A55-MB ALU	80576.0	524.9	153.5	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A55-NB ALU	79511.0	524.9	151.5	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A55-NMB ALU	80045.0	524.9	152.5	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A55-NWB ALU	79913.0	524.9	152.2	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A55-WB ALU	80311.0	524.9	153.0	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A65-NB ALU	78530.0	524.9	149.6	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 A65-NWB ALU	77560.0	524.9	147.8	1.0	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED930-4S/740 A65-VWB ALU	77087.0	524.9	146.9	1.0	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED930-4S/740 A65-WB ALU	76587.0	524.9	145.9	1.0	0.005	0.004	0.004	0.003	104.0	83.2	83.2	62.4
BVP657 LED930-4S/740 DW10 ALU	78539.0	524.9	149.6	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6
BVP657 LED930-4S/740 DW30 ALU	78863.0	524.9	150.2	1.0	0.004	0.003	0.003	0.002	83.2	62.4	62.4	41.6

** Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" are valid

ANNEX

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

The table in this annex is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

This EPD was done according to a specific customer use location that can be read in the paragraph **PRODUCT USE AND MAINTENANCE (B1-B7)**.

If for example the EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	5,88E+00	2,61E-01	-1,25E-01	6,02E+00	3,02E-01	5,41E-01	MND	MND	MND	MND	MND	4,06E+02	MND	MNR	1,77E-02	2,62E-01	1,88E-01	-1,09E+01

Divide that value according to the EU value from the following table (EU = 3,96E-01) and then multiplying for the Finland value from the same table (FINLAND = 2,70E-01).

Thus, the calculation of this example would be:

$$\text{New B6 GWP tot for Finland} = (4,06E+02 / 3,96E-01) \times 2,70E-01 = 2,76 \text{ E+02}$$

Country	GWP tot (kg CO2 eq. per kwh)
AUSTRALIA	9,59E-01
AUSTRIA	3,37E-01
BELGIUM	2,63E-01
CHINA	1,14E+00
DENMARK	2,91E-01
EU	3,96E-01
FINLAND	2,70E-01
FRANCE	8,77E-02
GERMANY	5,32E-01
HUNGARY	4,67E-01
IRELAND	4,26E-01
ITALY	3,94E-01
LATAM	3,50E-01
NAM	4,83E-01
NETHERLANDS	5,88E-01
NORWAY	2,59E-02

POLAND	1,05E+00
PORTUGAL	4,22E-01
ROW	7,32E-01
SPAIN	3,34E-01
SWEDEN	4,95E-02
SWITZERLAND	5,38E-02
UK	3,17E-01

Source Ecoinvent 3.8