



1 x 9290037730 34W

1 x 5400 lm


Polar intensity diagram



Quantity estimation diagram

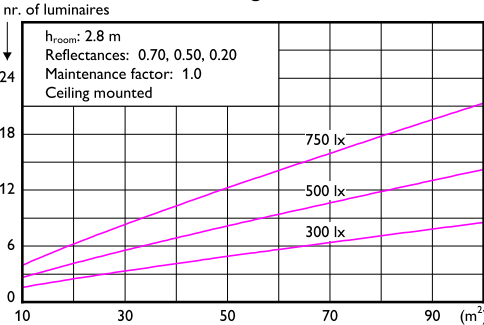

UGR diagram

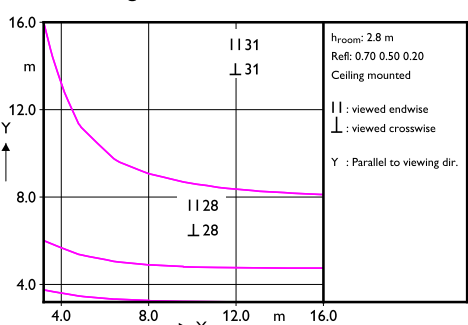

Light output ratio 1.00
Service upward 0.50
Service downward 0.50

CIE flux code 15 39 69 50 100

UGRcen (4Hx8H, 0.25H) 29

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80 0.80				0.70 0.70				0.50 0.50			
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.32	0.31	0.30	0.29	0.28	0.21	0.17	0.13	0.13	0.10	0.05	0.00
0.80	0.41	0.39	0.37	0.36	0.35	0.27	0.22	0.18	0.18	0.14	0.07	0.00
1.00	0.48	0.45	0.44	0.42	0.41	0.33	0.27	0.22	0.22	0.17	0.09	0.00
1.25	0.56	0.51	0.50	0.48	0.47	0.39	0.32	0.27	0.26	0.21	0.12	0.00
1.50	0.61	0.56	0.56	0.53	0.51	0.43	0.36	0.31	0.29	0.25	0.15	0.00
2.00	0.70	0.63	0.64	0.61	0.58	0.51	0.42	0.37	0.34	0.30	0.19	0.00
2.50	0.77	0.68	0.70	0.66	0.62	0.56	0.47	0.42	0.38	0.34	0.22	0.00
3.00	0.82	0.71	0.74	0.70	0.66	0.60	0.50	0.46	0.41	0.38	0.25	0.00
4.00	0.88	0.76	0.80	0.75	0.71	0.65	0.55	0.51	0.45	0.42	0.28	0.00
5.00	0.93	0.80	0.84	0.79	0.74	0.69	0.58	0.55	0.48	0.46	0.31	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	30450	27040	25262	24708	25262	27040	30450
50.0	32640	28741	26733	26111	26733	28741	32640
55.0	34791	30380	28138	27447	28138	30380	34791
60.0	36913	31965	29480	28719	29480	31965	36913
65.0	39184	33644	30898	30061	30898	33644	39184
70.0	41537	35353	32328	31411	32328	35353	41537
75.0	43950	37064	33741	32740	33741	37064	43950
80.0	46670	38973	35312	34216	35312	38973	46670
85.0	49927	41251	37188	35979	37188	41251	49927
90.0	53565	43736	39212	37876	39212	43736	53565

(cd/m²)