



1 x 9290020041 19W 6500K

1 x 2300 lm


Polar intensity diagram



Quantity estimation diagram

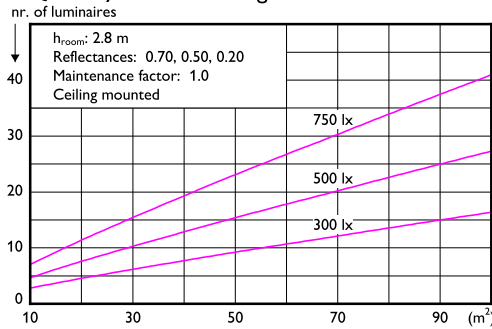

UGR diagram

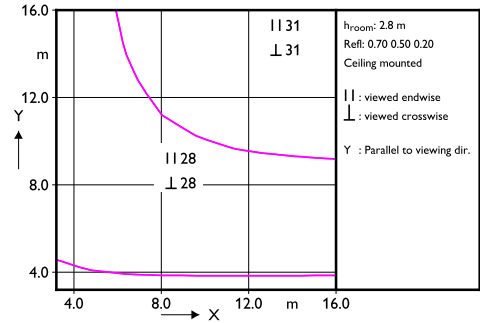

Light output ratio 0.99
Service upward 0.16
Service downward 0.83

CIE flux code 38 66 87 84 99

UGRcen (4Hx8H, 0.25H) 28

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
0.80	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.25	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
1.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
2.50	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
3.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
4.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00
5.00	0.80	0.80	0.50	0.50	0.50	0.30	0.30	0.10	0.10	0.10	0.00	0.00

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	44234	44234	44234	44234	44234	44234	44234
50.0	39630	39630	39630	39630	39630	39630	39630
55.0	35333	35333	35333	35333	35333	35333	35333
60.0	31357	31357	31357	31357	31357	31357	31357
65.0	27731	27731	27731	27731	27731	27731	27731
70.0	24455	24455	24455	24455	24455	24455	24455
75.0	21579	21579	21579	21579	21579	21579	21579
80.0	19050	19050	19050	19050	19050	19050	19050
85.0	16886	16886	16886	16886	16886	16886	16886
90.0	15029	15029	15029	15029	15029	15029	15029

(cd/m²)

171125001G

2018-11-15