



1 x 9290019409 8.8W 2700K

1 x 800 lm


Polar intensity diagram



Quantity estimation diagram

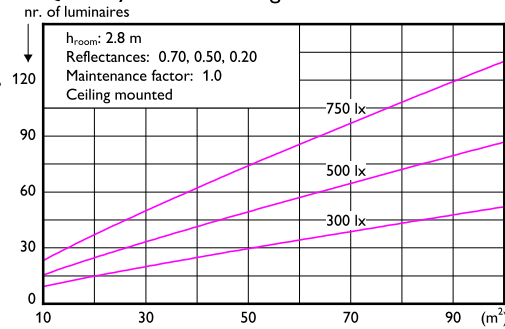

UGR diagram

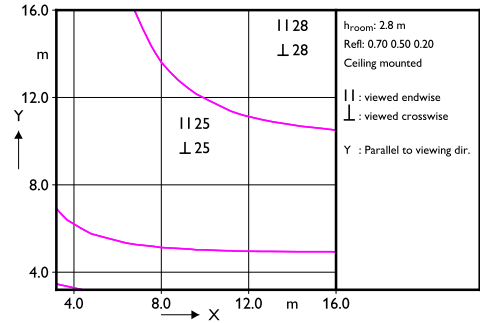

Light output ratio 1.00
Service upward 0.34
Service downward 0.66

CIE flux code 28 55 79 66 100

UGRcen (4Hx8H, 0.25H) 25

Utilisation factor table

Room Index k	Reflectances (%) for ceiling, walls and working plane (CIE)											
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.00
0.60	0.30	0.10	0.30	0.20	0.10	0.10	0.10	0.10	0.10	0.10	0.00	0.00
0.80	0.36	0.35	0.34	0.33	0.33	0.25	0.22	0.18	0.20	0.16	0.12	0.12
1.00	0.46	0.43	0.43	0.42	0.40	0.32	0.29	0.24	0.26	0.21	0.16	0.16
1.25	0.53	0.49	0.50	0.48	0.47	0.39	0.34	0.29	0.30	0.26	0.20	0.20
1.50	0.61	0.56	0.57	0.55	0.53	0.45	0.40	0.35	0.35	0.31	0.24	0.24
2.00	0.67	0.61	0.62	0.60	0.57	0.50	0.44	0.39	0.39	0.35	0.27	0.27
2.50	0.76	0.68	0.71	0.67	0.64	0.57	0.51	0.46	0.45	0.41	0.33	0.33
3.00	0.83	0.73	0.77	0.73	0.69	0.63	0.56	0.52	0.50	0.46	0.37	0.37
4.00	0.88	0.77	0.81	0.77	0.72	0.67	0.60	0.56	0.53	0.50	0.40	0.40
5.00	0.94	0.81	0.87	0.82	0.77	0.72	0.65	0.61	0.57	0.55	0.44	0.44
5.00	0.98	0.85	0.91	0.85	0.80	0.76	0.68	0.65	0.60	0.58	0.47	0.47

Ceiling mounted

Luminance Table

Plane Cone	0.0	15.0	30.0	45.0	60.0	75.0	90.0
45.0	12706	12706	12706	12706	12706	12706	12706
50.0	12100	12100	12100	12100	12100	12100	12100
55.0	11578	11578	11578	11578	11578	11578	11578
60.0	11125	11125	11125	11125	11125	11125	11125
65.0	10733	10733	10733	10733	10733	10733	10733
70.0	10393	10393	10393	10393	10393	10393	10393
75.0	10103	10103	10103	10103	10103	10103	10103
80.0	9856	9856	9856	9856	9856	9856	9856
85.0	9656	9656	9656	9656	9656	9656	9656
90.0	9497	9497	9497	9497	9497	9497	9497

(cd/m²)

2018-11-19